



FISSURED Panels/
DOWN DX/DXL Suspension System

LEED Credits
Recycled Content: 25% – 50%

MR				EQ		
Waste Reduction ¹	Recycled Content	Regional Materials ²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

Features and Benefits


- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional FIRECODE™ formulation designed to meet life safety codes.

Applications

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores

Substrate

- Water-felted mineral fiber

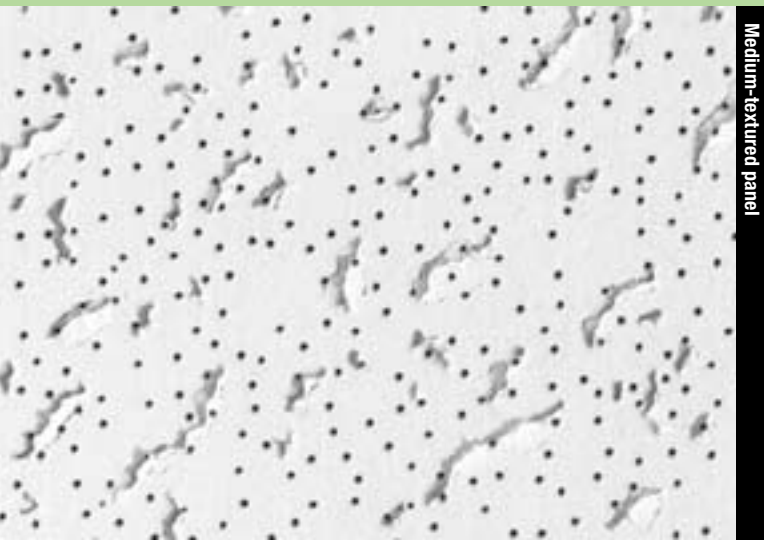

Medium-textured panel

Call 888 874.2450 for samples



White

UL Classified											
Edge	Panel Size	Class ³	Item No.	NRC	CAC Min.	LR ⁴	Color	Grid Options	VOC Emissions	Recycled Content ⁵	Panel Cost
Fissured Panels	SQ 	Class A	560	.55	33	.81	White	A, B, C	Low	25%	\$
			585	.55	35	.81	White	A	Low	48–50%	\$
		Class A	562	.55	35	.81	White	A, B	Low	25%	\$
			586	.55	35	.81	White	A	Low	48–50%	\$
	SLT 	Class A	506	.55	33	.81	White	D	Low	25%	\$
		Class A	507	.55	35	.81	White	D	Low	25%	\$

Legend

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

Grid Profile Options

A DX®/DXL™	B DXW™	C CENTRICITEE™ DXT	D DX/DXL

**Physical Data/
Footnotes**

Product literature
 Data sheet: SC1815
ASTM E1264 classification
 Type III, Form 2, Pattern CD
ASTM E84 surface burning characteristics
 Class A
 Flame spread: 25
 Smoke developed: 50
Weight
 .61-1.2 lb./sq. ft. (Class A)
 1.14-1.22 lb./sq. ft. (Firecode)

Thermal resistance
 R-1.4 (Class A)
 R-1.6 (Firecode)
Maximum backloading
 See Warranty for details.
Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Footnotes
 1. Applies when USG acoustical ceilings recycling program is utilized.
 2. Dependent on location; see Sustainability selector.
 3. Fire-rated items: see UL design details.
 4. LR values are shown as averages.
 5. For details, see Sustainability selector.