

Sheetrock® Lay-In Ceiling Panel *ClimaPlus™*



10
Year Availability
3270



SHEETROCK Lay-In Ceiling Panel, Vinyl, with *CLIMAPLUS* Performance/
DONN ZXLA Suspension System

LEED Credits

Recycled Content: 23%
CLIMAPLUS No-Sag Warranty

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●	●		●	●

Features and Benefits

- Panels meet U. S. Dept. of Agriculture Food Safety Inspection Service requirements for food processing areas.
- SHEETROCK® brand CLEAN ROOM™ lay-in ceiling panels can be used in cleanroom environments up to Class 100.
- *CLIMAPLUS*™ 30-year lifetime no-sag system warranty up to 104 °F (40 °C)/95% relative humidity when used with a DONN® brand suspension system.

Applications

- Exterior protected soffits
- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms
- Marine environments

Substrate


- Gypsum panel

Call 888 874.2450 for color samples



White

Smooth-textured panel

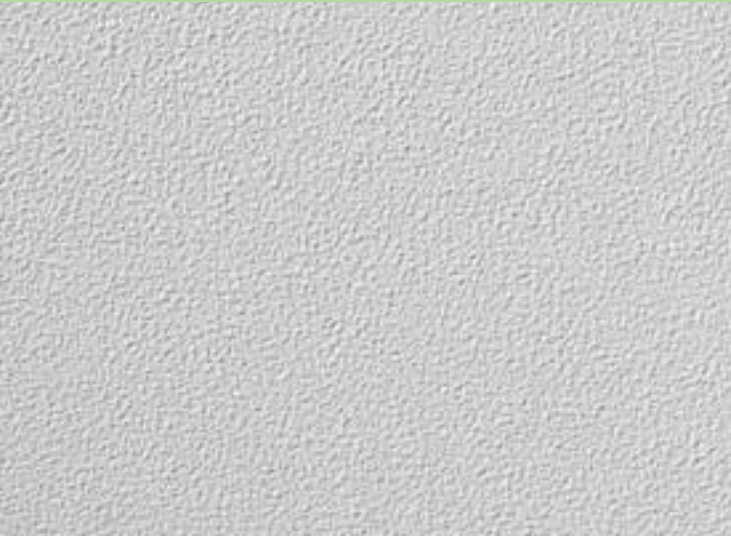

Sheetrock® Lay-In Ceiling Panel *ClimaPlus™*

Web Sites: usg.com
usgdesignstudio.com
sustainableceilings.com
seismicceilings.com

Technical Service 800 USG.4YOU
 Samples/Literature 888 874.2450
 Samples/Literature Fax 888 874.2348
 Customer Service 800 950.3839

See usg.com for the most up-to-date product information.

30
 Year System Warranty
 – No visible sag

	Edge	Panel Size	Class ²	Item No.	UL Classified			Color	Abuse-Resistant	Grid Options	Recycled Content ⁶	Panel Cost	
					NRC ³	CAC Min.	LR ⁴						
SHEETROCK Lay-In Ceiling Panel <i>ClimaPlus</i>, Vinyl	SQ 	2'x2'x1/2"		3260	—	35	.77	White		A, B, C, D,	23%	\$	
		2'x4'x1/2"		3270	—	40		.77	White		A, B, C, D,	23%	\$
SHEETROCK Lay-In Ceiling Panel <i>ClimaPlus</i>, CLEAN ROOM⁷	SQ 	2'x4'x1/2"		3200	—	40		.77	White		A, B, C, D,	23%	\$\$
	A DONN [®] DX [®] /DXL [™]	B DONN [®] DXLA [™]	C ZCLA [™]	D DONN CE ^{™7}									
Grid Profile Options													

Physical Data/ Footnotes

Product literature
 Data sheet: SC1820

ASTM E1264 classification
 Type XX, Pattern G

ASTM E84 surface burning characteristics
 Class A
 Vinyl
 Flame spread: 25
 Smoke developed: 50
 CLEAN ROOM
 Flame spread: 25
 Smoke developed: 50

Weight
 1/2" = 2.00 lb./sq. ft.

Thermal resistance
 1/2" = up to R-0.45

Maximum backloading
 See Warranty for details.

Maintenance
 Can be cleaned easily with a damp sponge. Use mild detergent and water – do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

U.S. Coast Guard acceptance
 Approved for use on merchant ships.

Footnotes
 1. Dependent on location; see Sustainability selector.
 2. Fire-rated items: see UL design details.
 3. NRC rating is .10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than .50

4. LR values are shown as averages.
 5. For details, see Sustainability selector.
 6. Field-cut edges of CLEAN ROOM panels must be sealed with white latex paint.
 7. Clean-room-rated applications require a suspension system with gasketed tee flanges such as DONN CE.



Manufactured by USG Interiors, Inc.
 550 West Adams Street
 Chicago, IL 60661

The following are trademarks of USG Interiors, Inc.
 or a related company: CE, CLEAN ROOM, *ClimaPlus*, DONN, DX, DXL, DXLA, FIRECODE, SHEETROCK, USG, ZCLA.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

SC1820/rev. 6-08
 © 2008, USG Interiors, Inc.
 Printed in U.S.A.