



TOUCHSTONE Panels with *CLIMAPLUS* Superior Performance/
DONN DX/DXL Suspension System

LEED Credits

Recycled Content: 48%
CLIMAPLUS Superior Performance for Mold/Mildew

MR				EQ		
Waste Reduction ¹	Recycled Content	Regional Materials ²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

Features and Benefits


- Panels are scuff- and abuse-resistant and can withstand day-to-day activity in high traffic areas.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a DONN® brand suspension system.
- FIRECODE™ formulation designed to meet life safety codes.

Applications

- Schools
- General offices
- Retail stores

Substrate

- Water-felted mineral fiber

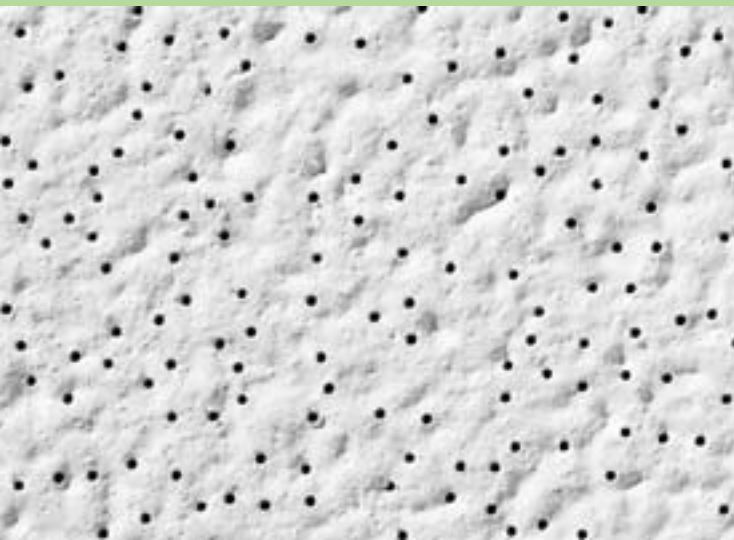

Medium-textured panel

Call 888 874.2450 for samples



White

30

Year System Warranty
 - No visible sag
 - Mold/mildew protection

TOUCHSTONE
 CLIMAPlus Panels

UL Classified													
Edge	Panel Size	Class ³	Item No.	NRC	CAC Min.	LR ⁴	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse-Resistant	Recycled Content ⁵	Panel Cost
SQ	2' x 2' x 5/8"		5893	.55	35	.86	White	A, B, C	Low			48%	\$\$
	2' x 4' x 5/8"		5894	.55	35	.86	White	A, B	Low			48%	\$\$
SLT	2' x 2' x 5/8"		5896	.55	35	.86	White	D	Low			48%	\$\$
FLB	2' x 2' x 5/8"		5899	.55	35	.86	White	E, F, G, H, I	Low			48%	\$\$

Legend

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

CLIMAPlus Superior Performance⁶

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold/mildew.

Grid Profile Options

A	B	C	D	E	F	G	H	I
DX®/DXL™	DXW™	CENTRICITEE™ DXT	DX/DXL	CENTRICITEE ⁹ DXT	CENTRICITEE DXTL	FINELINE® DXF	FINELINE® 1/8 DXFF	FINELINE® DXLF

Physical Data/ Footnotes

Product literature
 Data sheet: SC2214
ASTM E1264 classification
 Type III, Form 2, Pattern CEI
ASTM E84 surface burning characteristics
 Class A
 Flame spread: 25
 Smoke developed: 50

Weight
 1.0-1.3 lb./sq. ft.
Thermal resistance
 R-1.6
Maximum backloading
 See Warranty for details.
Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Footnotes
 1. Applies when USG acoustical ceilings recycling program is utilized.
 2. Dependent on location; see Sustainability selector.
 3. Fire-rated items: see UL design details.
 4. LR values are shown as averages.
 5. For details, see Sustainability selector.
 6. Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard

formulation that inhibits and retards the growth of mold/mildew. For details, see *Ceiling Systems Warranties and Limitations* (SC2102) and *CLIMAPlus Ceilings Certification of Performance* (SC2451).

