

USG "F" FISSURED™ BASIC ACOUSTICAL PANELS

USG "F" Fissured™ Basic
Acoustical Panels with USG Donn®
Brand Identitee® DXI™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050



Limited color options available.
See Ceiling Solutions Color
Program for details.

FEATURES AND BENEFITS

- Balanced Acoustics. NRC and CAC.
- Cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- VOC emissions meet CA Specification 01350.
- USDA Certified Biobased Product.⁴
- USG "F" Fissured™ Basic Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- Administrative Offices
- Schools
- Financial Institutions
- Religious Buildings

SUBSTRATE

- Cast Mineral Fiber

Medium-Textured Panel

USG "F" FISSURED™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com
 usg.ecomedes.com



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL/COM/GG UL 2818



BALANCED ACOUSTICS



HIGH RECYCLED CONTENT



USG "F" FISSURED™ BASIC PANELS

| Edge | Panel Size | Fire Rating | Item No. | UL Classified | | | Color | Grid Options | VOC Emissions | Abuse Resistant | Recycled Content ¹ | Panel Cost |
|--------|-----------------------|-------------|----------|---------------|----------|-----------------|-------|--------------|---------------|-----------------|-------------------------------|------------|
| | | | | NRC | CAC Min. | LR ² | | | | | | |
| SQ | 2'x2'x3/4" Paper-Back | Class A | 131 | 0.70 | 35 | 0.79 | White | A,B,C | Low | | 69% | \$\$\$ |
| | 2'x4'x3/4" Paper-Back | Class A | 135 | 0.70 | 35 | 0.79 | White | A,B | Low | | 69% | \$\$\$ |
| SL | 2'x2'x3/4" Paper-Back | Class A | 132 | 0.70 | 35 | 0.79 | White | D | Low | | 69% | \$\$\$ |
| | 2'x4'x3/4" Paper-Back | Class A | 136 | 0.70 | 35 | 0.79 | White | D | Low | | 69% | \$\$\$ |
| FL | 2'x2'x3/4" Paper-Back | Class A | 133 | 0.70 | 35 | 0.79 | White | E,F,G,H | Low | | 69% | \$\$\$ |

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.

High Recycled Content


USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC guidelines.

Abuse Resistant



GRID PROFILE OPTIONS

| A USG DX* | B USG DXW™ | C ³ USG Centricitee™ DXT™ | D USG DX* | E USG Centricitee™ DXT™ | F USG Fineline* DXF™ | G USG Fineline* 1/8 DXFF™ | H USG Identitee* DXI™ |
|--------------|---------------|---|--------------|----------------------------|-------------------------|------------------------------|--------------------------|
| | | | | | | | |

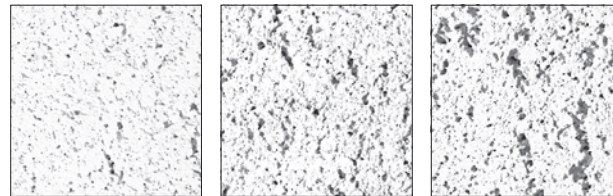

Composite of USG "F" Fissured™ Basic ceiling products shows range to be expected in a production lot and possibly in the same panel or tile. Ranges are random and cannot be specified. Texture appearance will vary based on ceiling height, installation methods and natural variations of the product.

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC1816

ASTM E1264 classification
 ASTM E1264-22 Type III, Form 4, Pattern D
 ASTM E1264-23 Type A, Form A1.4, Pattern D

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Weight
 1.70 lb./sq. ft.

Online tools
 usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

Thermal resistance
 R-1.7

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Texture
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Maximum 2'x2' with SQ edge panels.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
- Select custom color panels are available in limited sizes and edge profiles. Minimum order quantities apply. Please contact your local sales representative for availability, pricing, minimum order quantities and lead times.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1816/rev. 8-24

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXT, DXW, ECOBLEUPRINT, "F" FISSURED, FINELINE, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

