


USG SANDRIFT™ ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE

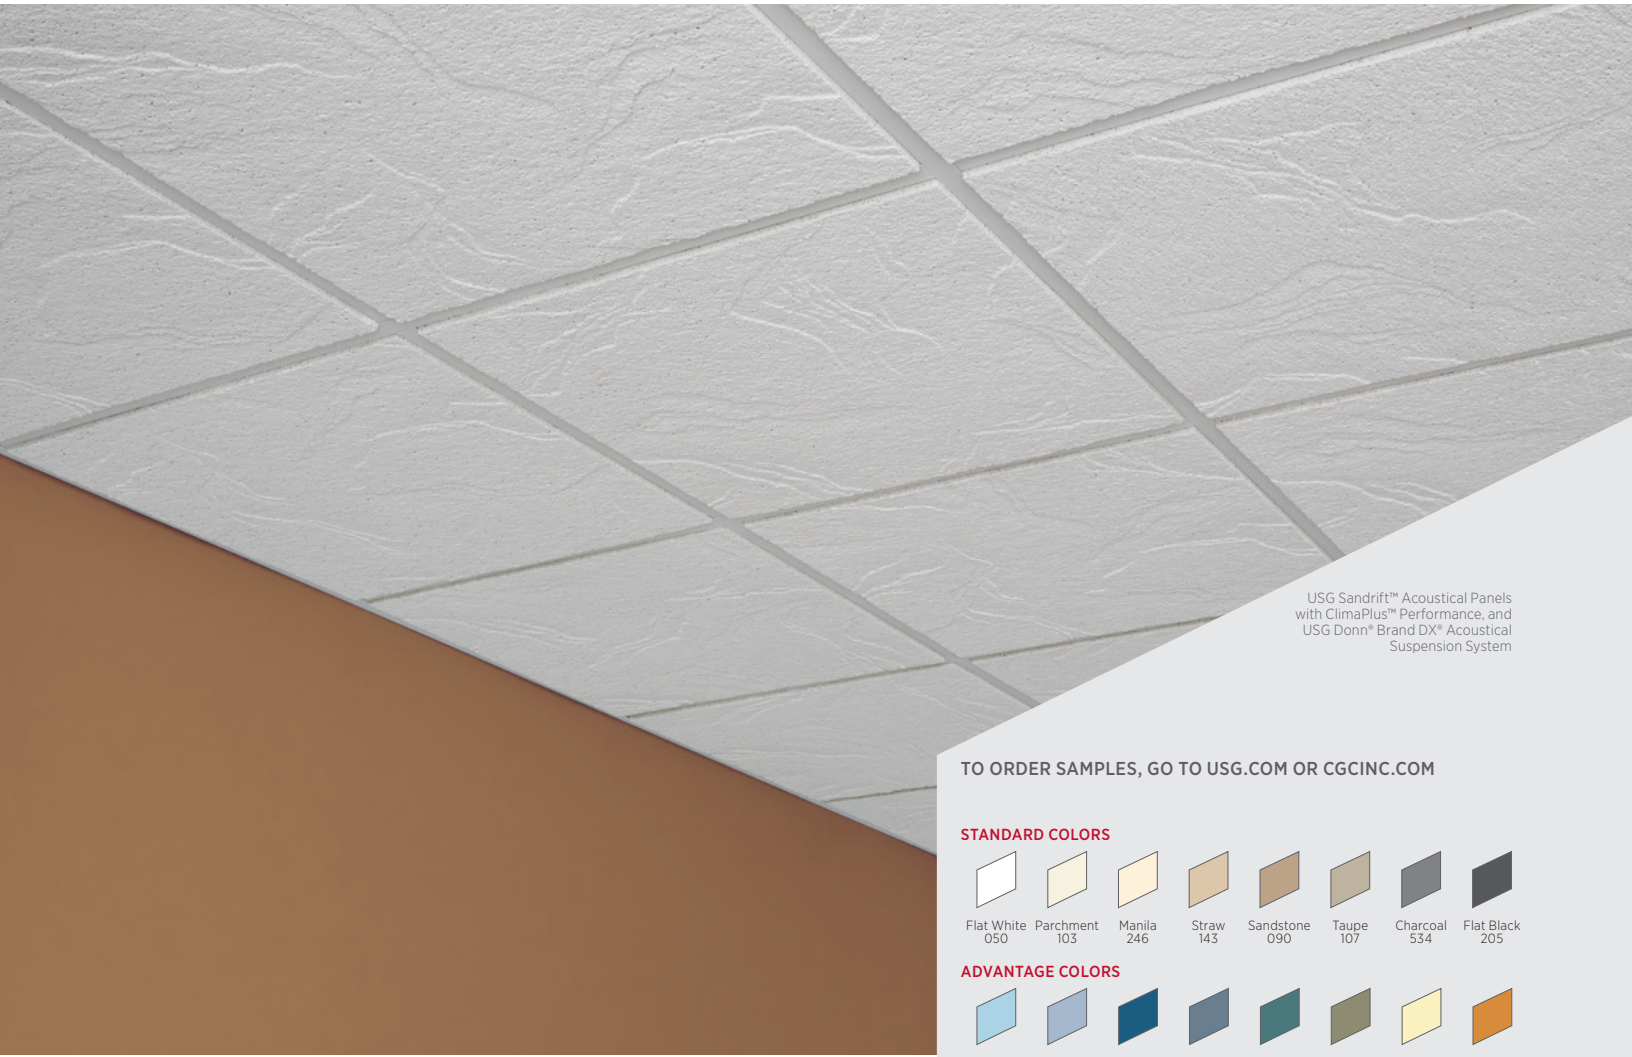


USG Sandrift™ Acoustical Panels
with ClimaPlus™ Performance, and
USG Donn® Brand DX® Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS

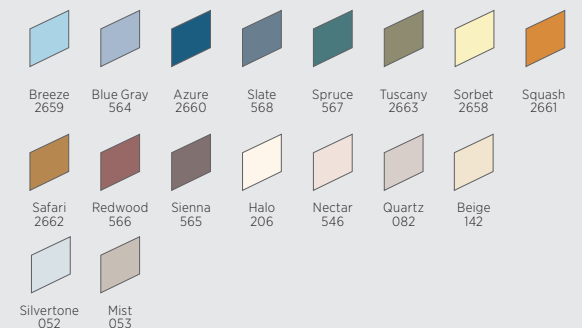

PREMIUM COLORS



FEATURES AND BENEFITS

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product.⁶
- VOC emissions meet CA Specification 01350.
- Balanced Acoustics. NRC and CAC.
- USG Sandrift™ Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- Conference and Lobby Areas
- Department Stores
- Entertainment and Gaming Areas
- Executive Offices
- Restaurants

SUBSTRATE

- Cast Mineral Fiber

USG SANDRIFT™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com
 usg.ecomedes.com



PRODUCT CERTIFIED
 FOR LOW CHEMICAL
 EMISSIONS:
 UL/COM/GG
 UL2818



UL Classified

Edge	Panel Size	Fire Rating ^{2,7}	Item No.	NRC	CAC Min.	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
SL 	2'x2'x3/4" Paper-Back		808	0.70	38	0.83	White Standard Advantage Premium	A	Low			72%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	809	0.70	38	0.83	White Standard Advantage Premium	C,D,E, F	Low			72%	\$\$\$
SL 	2'x2'x3/4" Paper-Back		815	0.55	35	0.83	White	B	Low	—		75%	\$\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC guidelines.

Firecode®

Abuse Resistant

USG SANDRIFT™ PANELS

USG SANDRIFT™ BASIC PANELS

GRID PROFILE OPTIONS

A USG DX*	B USG DXL™	C USG Centricitee™ DXT™	D USG Fineline® DXF™	E USG Fineline® 1/8 DXFF™	F USG Identitee® DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
 Data sheet: SC1841

ASTM E1264 classification
 ASTM E1264-22 Type III, Form 4, Pattern Z
 ASTM E1264-23 Type A, Form A1.4, Pattern Z

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

UL Type
 AP, AP-1, AP-2, AP-3

Weight
 1.55 lb./sq. ft. (Class A)
 1.72 lb./sq. ft. (Firecode® weight)

Online tools
 usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

Thermal resistance
 R-1.7 (Class A)
 R-1.3 (Firecode®)

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Texture
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

- Notes**
- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
 - Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation.
 - LR values are shown as averages.
 - For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).
 - To highlight the unique texture of USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance, choose light colors. See Colors selector for more information.
 - This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
 - It is not recommended to mix Firecode™ with Class A panels in the same ceiling plane.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1841/rev. 8-24
 © 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, ECOBLUEPRINT, FINELINE, FIRECODE, IDENTITEE, SANDRIFT, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

