


# USG DRYWALL SUSPENSION SYSTEM


## FLAT CEILINGS

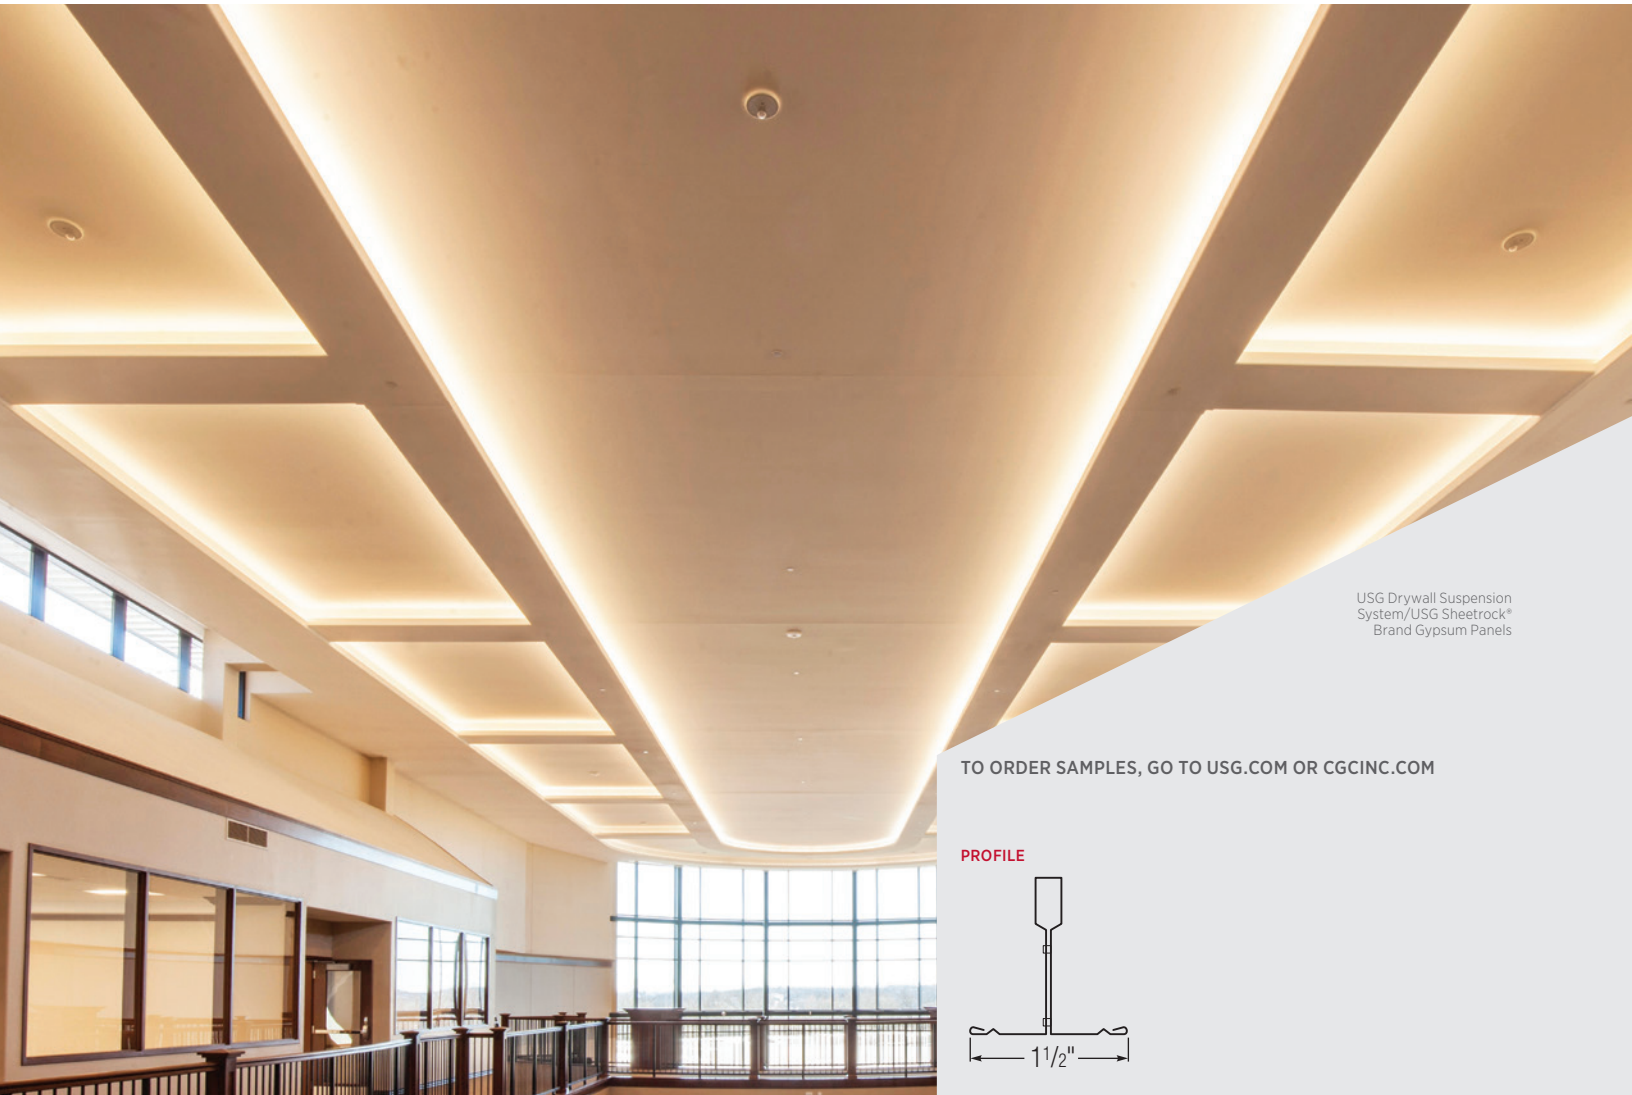

USG Drywall Suspension  
System/USG Sheetrock®  
Brand Gypsum Panels

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

### PROFILE



### FEATURES AND BENEFITS

- Installs faster than traditional framing methods.
- More than 60 UL fire-resistive designs.
- Assemblies available to meet STC and IIC requirements.
- Easily frames openings for Type F and Type G light fixtures.
- Evaluated for building code compliance according to ICC ESR-4358.
- G90 galvanization available for a variety of environmental conditions including exterior ceiling systems.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.

### APPLICATIONS

- Exterior Ceilings
- Fire-Rated and Non-fire-rated Interior Gypsum Board Ceilings

# USG DRYWALL SUSPENSION SYSTEM

## FLAT CEILINGS

ORDER SAMPLES/LITERATURE  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

TECHNICAL SERVICES  
 800.USG.4YOU (874-4968)


FOR MOST UP-TO-DATE  
 TECHNICAL INFORMATION  
 AND LEED REPORT TOOL  
 usgdesignstudio.com  
 cgcdesignstudio.com  
 usg.ecomedes.com

30 YEAR LIMITED SYSTEM WARRANTY


- No Visible Sag
- Mold/Mildew Protection

### SYSTEM COMPONENTS


Straight Main Tees





Cross Tees



Spanning Tees<sup>2</sup>



Moldings



Accessories

	ASTM Class	Length	Height	Item No.	Fire Rating	IBC Seismic Design <sup>4</sup>	Rated Load <sup>1</sup>					
							Hanger Spacing-lb./LF					
							24"		36"		48"	
						L/240	L/360	L/240	L/360	L/240	L/360	
DGLW	Heavy Duty	12'	1.617"	DGLW26 DGLW26E(G90) <sup>3</sup>		A-F	129	86	57	38	24	16

	ASTM Class	Length	Height	Item No.	Fire Rating	IBC Seismic Design <sup>4</sup>	Span L/360 lb./LF	
							Span	Value
DGLW	—	2'	1-1/2"	DGLW224 DGLW224E (G90) <sup>3</sup>		A-F	24"	99.9
		26"	1-1/2"	DGLW2624		A-F	26"	93.1
		4'	1-1/2"	DGLW424		A-F	48"	15.9
		50"	1-1/2"	DGLW50			50"	14.1
		72"	1-1/2"	DGLW624			72"	4.7
DGW	—	5' 6' 7' 8'	1.617"	DGW-6026DM DGW-7226DM DGW-8426DM DGW-9626DM	Class A	A-F	60" 72" 84" 96"	
		12'	—	DGWM24 DGWM24E <sup>3</sup>	—	A-F	—	—
		12'	—	DGCM27E <sup>3</sup>	—	A-F	—	—
		12'	—	DGLC-12	—	A-F	—	—

DGSC180 Splice Clip*	DGTC90 Transition Clip	DGC4, DGC6, DGC8 USG Compasso™ Drywall Clip	DGWC Wall Attachment Clip	CMAC-1 Close Mount Attachment Clip

\* See AC3152 for alternative splice details

### Firecode\*

#### Product literature and samples

Drywall suspension systems guide: AC3152  
 Data sheet: AC3117  
 Data sheet wall-to-wall: AC3230  
 Samples: 257202  
 Direct mount install guide: AC5420

#### Material

Min. G40 hot-dipped galvanized steel.  
 G90 hot-dipped galvanized steel available for select items.

#### Online tools

usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

#### Installation

Install according to ASTM C636, ASTM E580, ASTM C754 CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

#### Limitations

For exterior applications, the suspension system should be reviewed by a structural engineer. Please refer to SC2561 for more information about exterior ceiling applications.

#### ICC Evaluation Services, LLC. Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-4358 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

#### Notes

- All USG main tees, cross tees and main tee-hanger wire connections meet ASTM E580 requirements for tension and compression strength, as tested per ASTM C1925.
- Spanning tees for Direct Mount System manufacturing with cross tee connection clip at one end and flush-end at other. See *Direct Mount System Installation Guide* AC5420.
- Products with 'E' in name are made of G90 HDG steel.
- Non-exempt per IBC systems are seismically tested in accordance with ASTM E3118.

### PHYSICAL DATA/ FOOTNOTES

Revit is the trademark of Autodesk Inc.

#### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

#### AC3117/rev. 7-24

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, FIRECODE, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

