

USG LEVELROCK® BRAND SRB™ SOUND REDUCTION BOARD

Economical, high-performance sound reduction board

- Provides excellent sound control
 - Sound systems meet or exceed International Building Code requirements for 50 IIC and 50 STC
 - Water-resistant, smooth coated finish
 - 1-1/8 in. (29 mm) total system thickness minimizes floor transitions
 - Robinson tested for system durability
 - GREENGUARD Gold Certification; qualifies as a low VOC emitting material (meets CA 01350)
-

DESCRIPTION

USG Levelrock® Brand SRB™ Sound Reduction Board is an economical sound control material used to increase IIC and STC levels in all types of construction. With its thin 3/8 in. (10 mm) profile, USG Levelrock SRB sound reduction board, when topped with 3/4 in. (19 mm) USG Levelrock® floor underlayment, minimizes transition height changes between rooms.

INTENDED FOR

- Commercial, light-commercial, residential and multi-family
 - Concrete slabs, concrete planks, corrugated steel decks, OSB or plywood and USG Structural Concrete Panels
-

LIMITATIONS

1. Do not use in exterior applications.
2. Do not use as a wear surface.
3. Do not use mechanical fasteners to install the sound reduction board as mechanical fasteners conduct impact sound, eliminating acoustical isolation.
4. Do not install where continuous exposure to moisture is a possibility.
5. Structure shall be designed so that deflection does not exceed L/240 from combined dead and live loads and L/360 from live loads. Certain floor coverings such as marble, limestone, travertine and wood may have more restrictive deflection limits. Consult the appropriate floor-covering manufacturer.
6. For wood subfloors, do not install on plywood/OSB subfloors lacking tongue and groove edges without back-blocking.
7. Do not install when temperature is below 50 °F (10 °C).
8. USG Levelrock floor underlayment should be poured to a minimum 3/4 in. (19 mm) thickness over USG Levelrock SRB sound reduction board.

INSTALLATION

USG Levelrock SRB sound reduction board can be used over a variety of subfloors including plywood, OSB and concrete. The subfloor must be clean, dry and free of construction debris and dirt. The building temperature should be maintained at a 50 °F (10 °C) minimum. During the entire process of installation, the building must be enclosed and USG Levelrock SRB sound reduction board protected from the environment.

USG Levelrock SRB sound reduction board should be primed with USG Levelrock™ Wood Primer prior to the installation of USG Levelrock floor underlayment.

USG Levelrock® Perimeter Isolation Strip must be installed between the sound reduction board and walls or floor protrusions. The perimeter isolation strip must be installed so that there is no leakage of USG Levelrock floor underlayment as any breach will compromise the sound system performance. Follow the detailed drawings in *Assemblies* (pg. 3) for specific instructions for USG Levelrock SRB sound reduction board, or contact USG for further details.

USG Levelrock floor underlayment must be installed at a 3/4-in. (19 mm) minimum thickness. After the floor underlayment has set, cut off excess perimeter isolation strip (and remove staples if used). Protect USG Levelrock underlayment floors poured over USG Levelrock SRB sound reduction board from heavy trade traffic loads (i.e. loaded drywall carts, heavy tool cabinets, etc.) with plywood.

FINISH FLOORING

1. Install hardwood, tile or natural stone according to ANSI A108.5, leaving a 1/4 in. (6 mm) gap between the flooring material and wall. Fill the gap with acoustical sealant to prevent lateral sound transmission.
2. With vinyl and carpet, no gaps are required between the flooring material and walls. Carpet tack strips should be installed at least 1/4 in. (6 mm) from the edge of the poured USG Levelrock floor underlayment.
3. Shim baseboards 1/8 in. (3 mm) above the finished floor and fill the gap underneath with acoustical sealant.

For further details on installation requirements, specifications and the most up-to-date product information, please see usg.com.

PRODUCT DATA

Size (ft.)	4 x 4
Boards/pallet	80
Coverage per pallet (sq. ft./pallet)	1280
Mat thickness (inches)	3/8
Board thickness (mm)	9.5
Weight (lbs./sq. ft.)	0.72

TEST DATA


IIC: Additional 5-8 points (depending on floor covering)

STC: Additional 2-3 points

NOTE: Contact USG for detailed test results of various systems. Tests were conducted under laboratory conditions according to ASTM E90 and E492 in a NVLAP-accredited facility (NVLAP Lab Code: 200132-0). Actual field conditions may vary from laboratory conditions and affect results. Consult ASTM E1007 for a list of variable conditions.


ASSEMBLIES

WOOD SUBFLOOR, WOOD FRAME —
USG LEVELROCK INSTALLED BEFORE DRYWALL

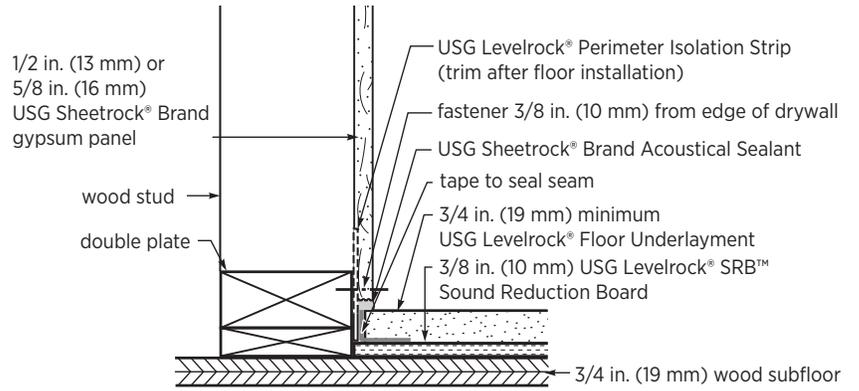

USG Levelrock® SRB™ Sound Reduction Board Over Plywood

WOOD SUBFLOOR, WOOD FRAME —
USG LEVELROCK INSTALLED AFTER DRYWALL

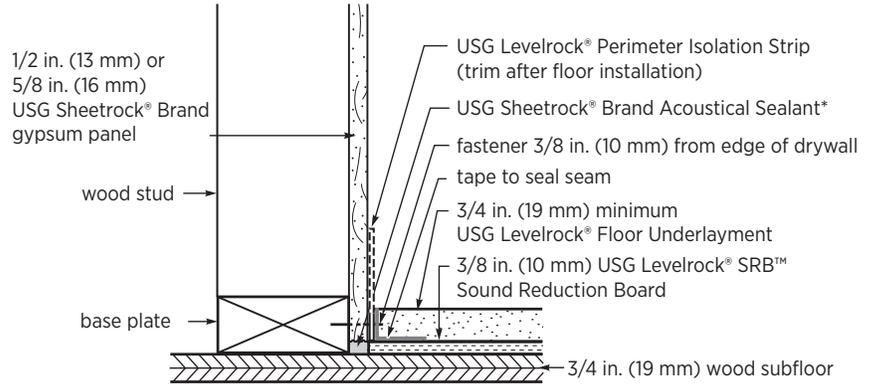

USG Levelrock® SRB™ Sound Reduction Board Over Plywood

* optional

NOTE Drawings not to scale.

SUBMITTAL APPROVALS

Job Name	
Contractor	Date

PRODUCT INFORMATION

See usg.com for the most up-to-date product information.

GREENGUARD INFORMATION

GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg.

LEED INFORMATION

For the most up-to-date information on LEED rating systems, project certification and the U.S. Green Building Council, please visit usgbc.org.

DANGER

May cause cancer. May damage lungs by prolonged or repeated exposure to respirable crystalline silica. Do not handle until all safety precautions have been read and understood. Avoid breathing dust. Use only in a well-ventilated area, wear a NIOSH/MSHA-approved respirator. Cut and trim with a razor knife or hand saw to minimize dust levels. If a router is used it must have a dust collection system. Wear protective gloves/protective clothing/eye protection. If exposed or concerned: Get medical advice/attention. If eye contact occurs, flush thoroughly with water for 15 minutes. Dispose of in accordance with local, state, and federal regulations. For more information call Product Safety: 800-507-8899 or see the SDS at usg.com

KEEP OUT OF REACH OF CHILDREN.

TRADEMARKS

The trademarks USG, LEVELROCK, SHEETROCK, SRB, IT'S YOUR WORLD. BUILD IT., the USG logo, the design elements and colors and related marks are trademarks of USG Corporation or its affiliates. LEED is a registered trademark of U.S. Green Building Council.

NOTE

The information in this document is subject to change without notice. USG Corp. and/or its affiliates assume no responsibility for any errors that may inadvertently appear in this document. Consult your USG sales office or representative for information.

NOTICE

We shall not be liable for consequential, incidental or special damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to the replacement of defective goods or a refund of the purchase price, at USG's option, and does not include costs of labor, floor-covering materials, or any other costs associated with material replacement. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered. For all applicable terms and conditions, please refer to *USG Levelrock® Brand & USG Durock™ Brand Performance Flooring Products Two-Year Limited Warranty for USG Levelrock Applicators (IG1727)* located at usg.com.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read applicable SDSs and literature before specification and installation.



800.USG.4YOU
800 (874.4968)
usg.com

Manufactured for
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

IG1523/rev. 2-21
© 2021 USG Corporation and/or
its affiliates. All rights reserved.
Printed in U.S.A.

