USG BILLO™ 3-DIMENSIONAL PANELS

USG Billo™ 3-Dimensional Panels, White Opaque/USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System, Flat White

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

WHITES

White Translucent   White Opaque

COLOR GALLERY

Agave	Blush	Calypso	Cornflower	Glacier	Graphite	Gunmetal	Honeydew
Lago	Lemon	Mimosa	Mulberry	Nutmeg	Olive	Olivewood	Orchid
Pacific	Periwinkle	Pomegranate	Sahara	Santorini	Seaglass		
Spice	Sunflower	Sunset					

Weave Pattern

Wave Pattern

FEATURES AND BENEFITS

- Three-dimensional curved panels punctuate flat ceiling planes with rhythm and depth.
- 2'x2' preformed polycarbonate panels create myriad patterns with just one simple panel shape.
- Lightweight lay-in panels install into 9/16″ narrow-profile USG Donn® Brand suspension systems, allowing full ceiling accessibility.
- Luminous panels may be backlit with fluorescent strip fixtures or integrated with standard lay-in fixtures.

APPLICATIONS

- Interior Applications
- Wall to Wall Ceilings
- New Construction or Renovation
- Patterned aesthetics

USG   CGC

IT'S YOUR WORLD. BUILD IT.™

USG BILLO™ 3-DIMENSIONAL PANELS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

PRODUCT INFORMATION

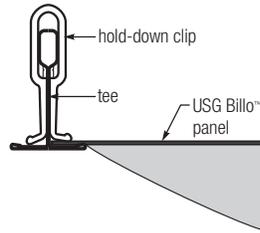| Materials	Sizes and Weight	Module Size
Panels: Preformed polycarbonate. Suspension System: All 2'x2' USG Donn® Brand 9/16″ Centricitee™ DXT™, Identitee® DXI™, and Fineline® DXF™/DXFF™ profiles.	Panels: 2'x2' Weight: 0.25 lb./sq. ft.	Full 2'x2' modules only

FINISHES

Panel Color	Panel Light Transmission	Suspension System Coordinating Colors
White Translucent	26%	Flat White
White Opaque	8%	Flat White
Color Gallery Colors	Varies per Color	Flat White or per Specification

EDGE DETAILS

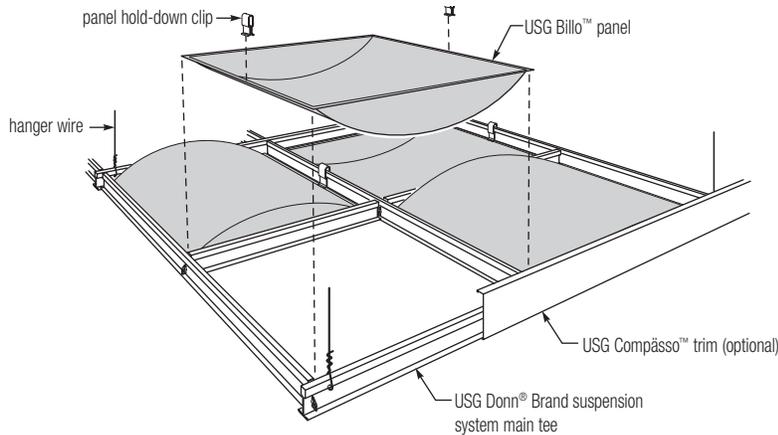| USG Billo™ Panels with 9/16″ USG Donn® Brand Centricitee™ DXT™ Suspension	USG Billo™ Panels with 9/16″ USG Donn® Brand Fineline® DXF™ Suspension	USG Billo™ Panels with 9/16″ USG Donn® Brand Fineline® 1/8 DXFF™ Suspension	USG Billo™ Panels with 9/16″ USG Identitee® DXI™ Suspension

PANEL HOLD-DOWN CLIP

Supplied with 9/16″ down panels

hold-down clip
tee
USG Billo™ panel

ASSEMBLY

View from above

panel hold-down clip
USG Billo™ panel
hanger wire
USG Compässo™ trim (optional)
USG Donn® Brand suspension system main tee

PHYSICAL DATA

Additional Documents and Resources
System Brochure: IC472
Data Sheet: IC473
Warranty: SC2102
Installation: IC456
Care and Maintenance: IC456

Online Tools
usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

Fire Classification
USG Billo™ panels meet the Class A acceptance criteria of 2021 IBC Section 803.1.1.1 for interior finishes as tested in accordance with NFPA 286.

USG Billo™ panels meet the Class B requirements for flame spread and smoke developed as tested in accordance with CAN/ULC S102 surface-burning characteristics.

Note
For Canadian product needs, please contact your local sales representative.

Ceiling layout design must be full ceiling panel module.

IC473/rev. 6-24
© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

USG ◆ CGC