



CGC Fissured Basic Panels/
CGC Donn DX/DXL
Suspension System



Flat White
050

FEATURES AND BENEFITS

- Economical, all-purpose ceiling pattern available in various panel sizes.
- Optional Firecode® product designed to meet life-safety codes.

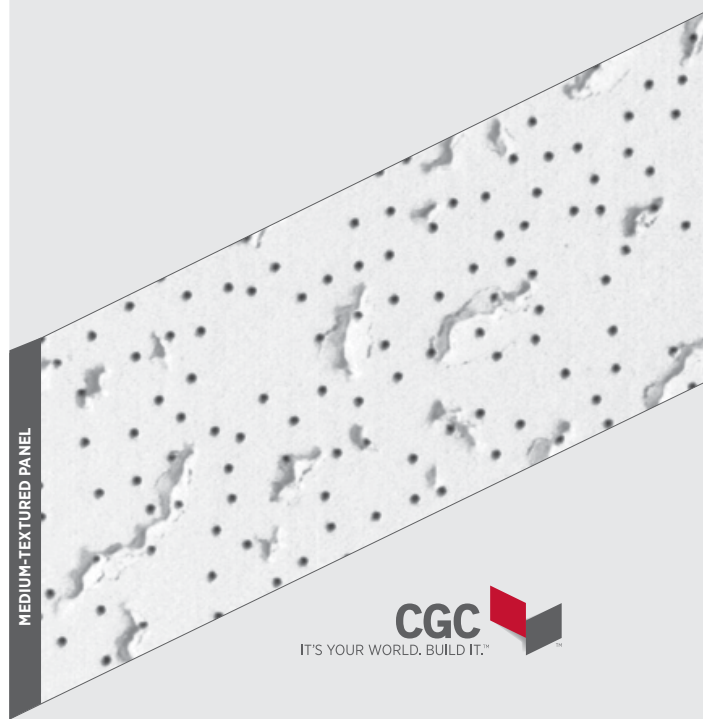
APPLICATIONS

- Administrative offices
- Corridors
- Mass merchandisers
- Convenience stores


SUBSTRATE





- Wet-formed mineral fiber

MEDIUM-TEXTURED PANEL



CGC FISSURED BASIC PANELS

 **UL Classified**

Edge	Panel Size	Class ²	Item No.	NRC	CAC Min.	LR ³	Colour	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
	2' x 2' x 5/8"	Class A	560	.55	33	.81	White	A, B, C	Low	24.7-25.1%	\$
	2' x 2' x 5/8"		585	.55	35	.81	White	A	Low	48.7-49.4%	\$
	2' x 4' x 5/8"	Class A	562	.55	35	.81	White	A, B	Low	24.7-25.1%	\$
	2' x 4' x 5/8"		586	.55	35	.81	White	A	Low	48.7-49.4%	\$
	2' x 2' x 5/8"	Class A	506	.55	33	.81	White	D	Low	24.7-25.6%	\$
	2' x 4' x 5/8"	Class A	507	.55	35	.81	White	D	Low	24.7-25.6%	\$





LEGEND

 **Low Emissions (VOC)**

Low-emitting performance meets CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on the CHPS database for low-emitting materials. USG Certificate of Compliance for Low VOC Emissions also available on usg.com.

 **Firecode®**

GRID PROFILE OPTIONS

A DX°/DXL™	B DXW™	C ⁴ CENTRICITEE™ DXT™	D DX/DXL
			

PHYSICAL DATA/NOTES

Product literature
 Data sheet: SC1815E

ASTM E1264 classification
 Type III, Form 2, Pattern CD

**ASTM E84 and CAN/ULC S102
 surface burning characteristics**
 Class A
 Flame spread: 25
 Smoke developed: 50

Weight
 0.61–1.2 lbs./sq. ft. (Class A)
 1.14–1.22 lbs./sq. ft. (Firecode)

Thermal resistance
 R-1.4 (Class A)
 R-1.6 (Firecode)

Maximum backloading
 See Warranty for details.

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Notes
 1. For details, see LEED report tool at cgcdesignstudio.com.
 2. Fire-rated items: see UL design details.
 3. LR values are shown as averages.
 4. Maximum 2' x 2' with SQ edge panels.