


USG SHEETROCK® BRAND DUR-A-BEAD® CORNER BEAD

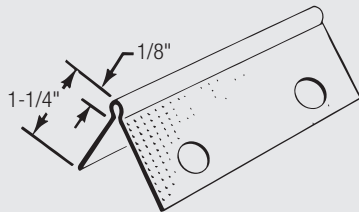

DESCRIPTION

USG Sheetrock® Brand Dur-A-Bead® Corner Bead is a low-cost, high-performance metal bead that protects external corners, angles and panel intersections in drywall construction. It is concealed with joint compound, delivering a smooth, finished corner protected from impact.

Quality, all-steel construction gives each piece unmatched strength, and galvanization provides enhanced galvanized steel rust resistance. Installs easily by crimping or nailing to steel or wood framing through panels.

CERTIFICATION

USG Sheetrock® Brand Dur-A-Bead® Corner Bead meets ASTM C1047, *Standard Specification for Accessories for Gypsum Wallboard*, which covers accessories used in assemblies of gypsum wallboard to protect edges and corners and to provide architectural features.

APPLICATION

1. Cut bead to desired length. Align bead tight to ceiling, press firmly into place and use drywall nails or staples to fasten bead to framing through wallboard. Fasten nails or staples every 9" in both flanges and placed opposite. Be sure all nails or staples are below wall level. May use "clinch-on" tool to attach. Use correct-size tool for flange width.
2. Finish corner with at least two coats of joint compound. Apply fill coat of compound (for example, USG Sheetrock® Brand All Purpose or Plus 3® Lightweight Joint Compound, or USG Sheetrock® Brand Easy Sand™ Lightweight Joint Compound) to both sides, feathering out 5"-6" on each side. Use knife to remove excess compound. Let dry. Sand lightly as necessary.
3. Apply finishing coat feathering 8" from nose of bead. Draw knife along one side of bead with one edge resting on nose of bead and other on surface of wallboard. Repeat for other side. Let dry. Sand and prime.

PRODUCT DATA

USG Sheetrock® Brand Dur-A-Bead® Corner Bead is available in 8', 9', 10' and 12' lengths.

STORAGE

Store in dry place. Avoid bending or other damage.

SUBMITTAL APPROVALS

Job Name	
Contractor	Date

PRODUCT INFORMATION

See usg.com for the most up-to-date product information.

TRADEMARKS

The trademarks USG, DUR-A-BEAD, EASY SAND, PLUS 3, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

NOTE

Products described here may not be available in all geographic markets. Consult your United States Gypsum Company sales office or representative for information.

CAUTION

Edges and notches (where present) may be sharp and can cut skin. Unload from package with caution and wear cut-resistant gloves. Falling pieces can pose an injury hazard. Do not store open boxes or individual pieces above chest level. For more information call Product Safety: 800 507-8899 or see the SDS at usg.com.

KEEP OUT OF REACH OF CHILDREN.

NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. For most current information, visit usg.com. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

SAFETY FIRST!

Follow good safety and industrial hygiene practices during handling and installing all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read Safety Data Sheets and related literature on products before specification and/or installation.

800 USG.4YOU
800 (874-4968)
usg.com

Manufactured by
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

J1572-USA-ENG/rev. 7-16
© 2016 USG Corporation and/or
its affiliates. All rights reserved.
Printed in U.S.A.