



USG DUROCK™ BRAND GYPSUM REHAB PRODUCTS

USG DUROCK™ SYSTEM SOLUTIONS

usg.com/repair

USG DUROCK™ BRAND GYPSUM REHAB PRODUCTS

To repair damaged gypsum floors and maintain their fire rating, look to USG. Our gypsum-based underlayments and floor patches are UL Classified and specified for use in 130+ fire-rated assemblies.

Step #1: Prepare existing underlayment

- Determine structural soundness
- Scrape and remove adhesives
- Remove loose debris and vacuum

Step #2: Apply USG Durock™ Brand Fusion™ Primer¹

- If the surface is soft, chalky and/or a low-strength gypsum underlayment, then a liberal coating of USG Durock™ Fusion Primer over the entire gypsum surface – including any exposed plywood or OSB – is required.

Step #3: Apply USG Durock™ Primer-Sealer²

Step #4: Resurface

Trowel USG Durock™ Tuf-Skim™ Floor Patch

OR

Pour USG Durock™ Quik-Top™ Series or Multi-Use Series Self-Leveling Underlayment

Step #5: Apply USG Durock™ Brand Primer-Sealer


- USG Durock™ Multi-Use Self-Leveling Underlayment must be sealed with USG Durock™ Primer-Sealer prior to floor covering adhesive application.
- For tile applications using Portland cement-based mortars over USG Durock™ Tuf-Skim Floor Patch, USG Durock™ Multi-Use Self-Leveling Underlayment or USG Durock™ Quik-Top™ Self-Leveling Underlayment, an application of USG Durock™ Primer-Sealer is required.
- If the floor-covering or adhesive manufacturer's sealing requirements are more stringent, their requirements take precedence.

Step #6: Apply floor-covering adhesive

Step #7: Apply new floor covering

Note

1. Allow USG Durock™ Fusion Primer to cure for a minimum of 8 hours.
2. Step is not required if troweling with USG Durock™ Tuf-Skim™ Floor Patch.

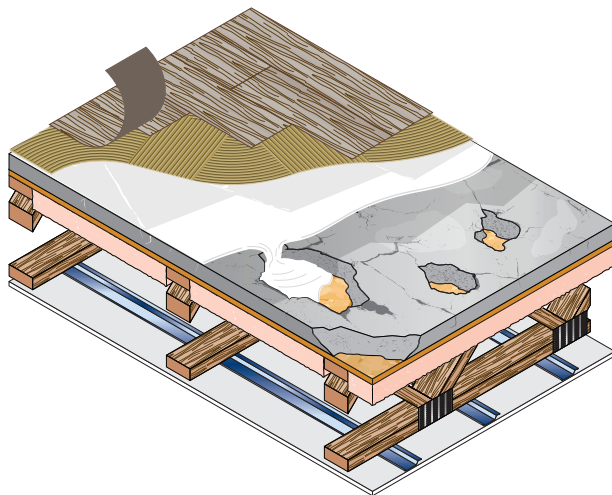

For more information on gypsum repair solutions, see *USG Rehabilitation Guidelines for Damaged Gypsum Underlayments* (CB822), gypsum underlayment repair videos, and specific product submittals and SDSs at usg.com/repair

CB5039-USG-ENG/rev. 8-24

© 2024 USG Corporation and/or its affiliates.
All rights reserved.
Printed in the USA

Manufactured by or for
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

800.USG.4YOU
800 (874-4968)
usg.com/repair
usg.com

PRODUCT INFORMATION

See usgperformanceflooring.com for the most up-to-date product information.

TRADEMARKS

The trademarks USG, DUROCK, FUSION, QUIK-TOP, TUF-SKIM, IT'S YOUR WORLD. BUILD IT., the USG logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.
UL is a registered trademark of UL LLC.

NOTICE

We shall not be liable for consequential, incidental or special damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to the replacement of defective goods or a refund of the purchase price, at USG's option, and does not include costs of labor, floor-covering materials, or any other costs associated with material replacement. Any claim shall be deemed

waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered. For all applicable warranty information, please refer to *USG Durock™ Brand Floor Preparation Products Two-Year Limited Warranty* (CB747) located at usg.com.
For all terms and conditions see usg.com/terms-and-conditions.

NOTE

The information in this document is subject to change without notice. USG Corp. and/or its affiliates assume no responsibility for any errors that may inadvertently appear in this document. Consult your USG sales office or representative for information.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read applicable SDSs and literature before specification and installation.