


# USG SANDRIFT™ ACOUSTICAL PANELS


CLIMAPLUS™ PERFORMANCE

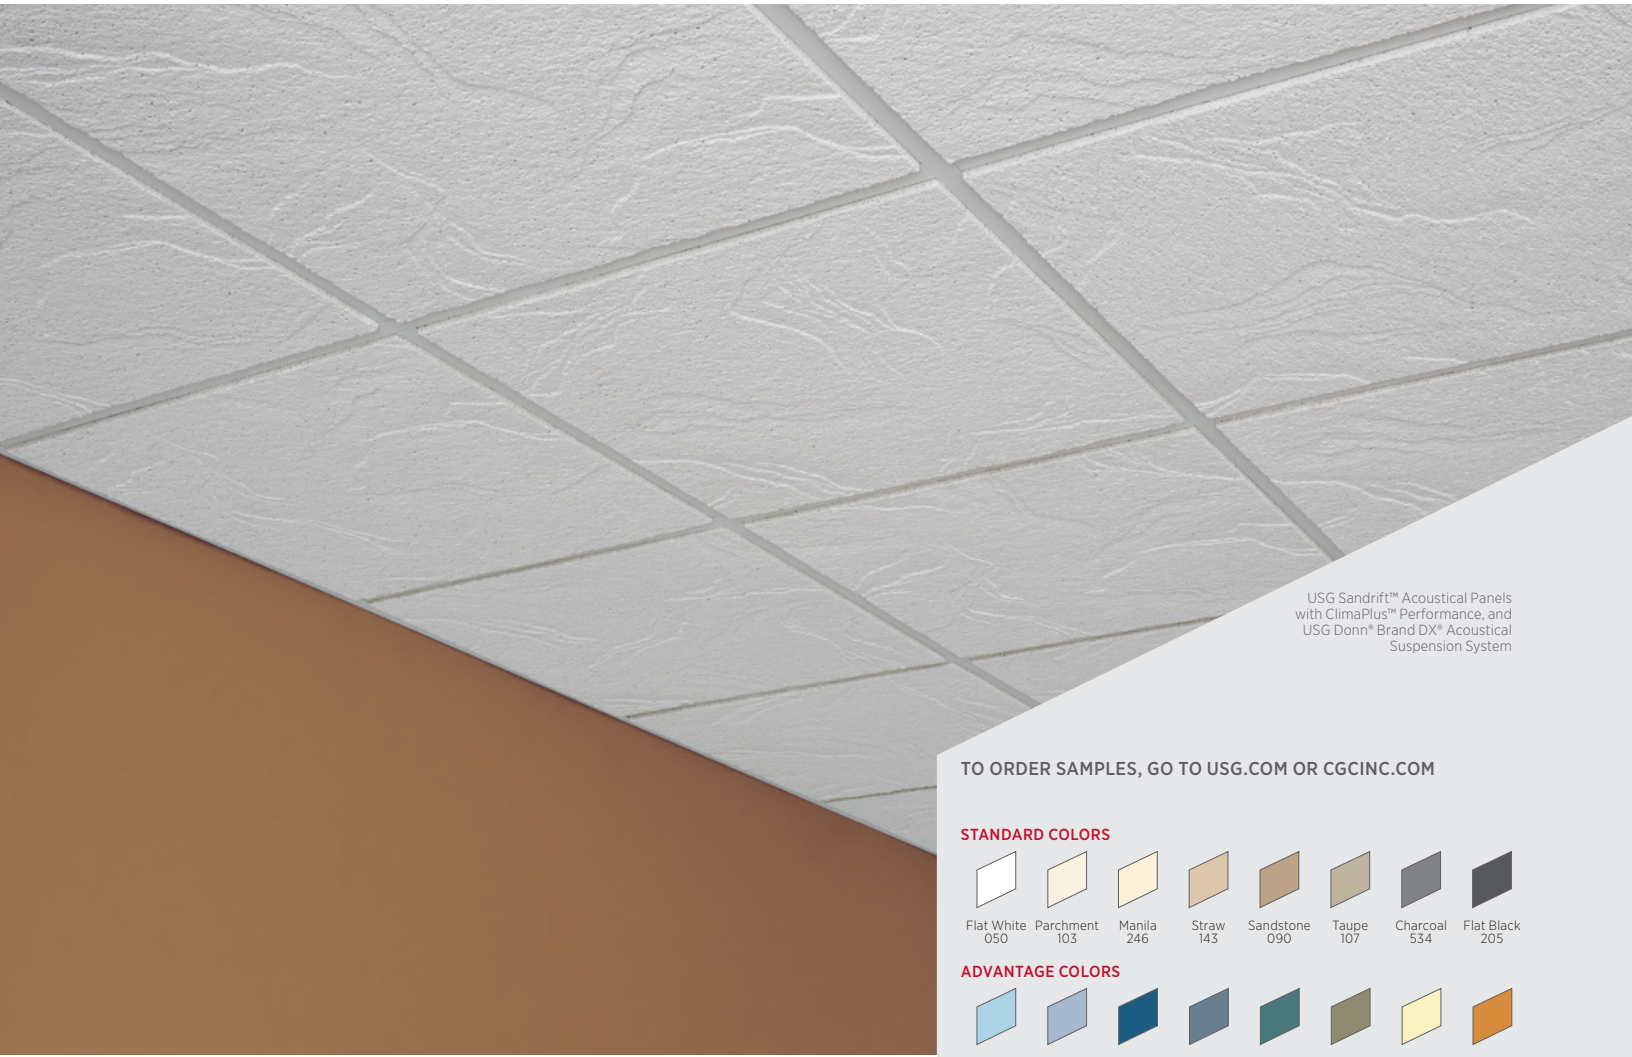


USG Sandrift™ Acoustical Panels  
with ClimaPlus™ Performance, and  
USG Donn® Brand DX® Acoustical  
Suspension System

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

## STANDARD COLORS



## ADVANTAGE COLORS

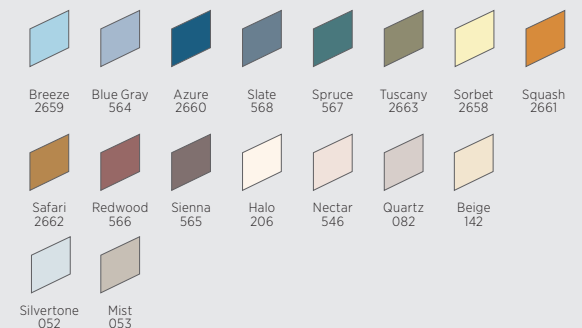

## PREMIUM COLORS



## FEATURES AND BENEFITS

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product.<sup>6</sup>
- VOC emissions meet CA Specification 01350.
- Balanced Acoustics. NRC and CAC.
- USG Sandrift™ Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to [USG.com](http://USG.com) or [CGCInc.com](http://CGCInc.com).

## APPLICATIONS

- Conference and lobby areas
- Department stores
- Entertainment and gaming areas
- Executive offices
- Restaurants

## SUBSTRATE

- Cast mineral fiber

# USG SANDRIFT™ ACOUSTICAL PANELS

## CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

TECHNICAL SERVICES  
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE  
 TECHNICAL INFORMATION  
 AND LEED REPORT TOOL  
 usgdesignstudio.com  
 cgcdesignstudio.com



PRODUCT CERTIFIED  
 FOR LOW CHEMICAL  
 EMISSIONS:  
 UL/COM/GG  
 UL 2818



### UL Classified

Edge	Panel Size	Fire Rating <sup>2</sup>	Item No.	NRC	CAC Min.	LR <sup>3</sup>	Color <sup>5</sup>	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content <sup>1</sup>	Panel Cost
SL 	2'x2'x3/4" Paper-Back		808	0.70	38	0.83	White Standard Advantage Premium	A	Low			69%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	809	0.70	38	0.83	White Standard Advantage Premium	C,D,E, F	Low			69%	\$\$\$
SL 	2'x2'x3/4" Paper-Back		815	0.55	35	0.83	White	B	Low	—		71%	\$\$\$

#### Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.

#### ClimaPlus™ Warranty Performance<sup>4</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

#### High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

#### Firecode<sup>®</sup>

Abuse Resistant

### USG SANDRIFT™ PANELS

### USG SANDRIFT™ BASIC PANELS

### GRID PROFILE OPTIONS

A USG DX <sup>®</sup>	B USG DXL™	C USG Centricitee™ DXT™	D USG Finline <sup>®</sup> DXF™	E USG Finline <sup>®</sup> 1/8 DXFF™	F USG Identitee <sup>®</sup> DXI™

**Product literature**  
 Data sheet: SC1841

**ASTM E1264 classification**  
 ASTM E1264-22 Type III, Form 4, Pattern Z  
 ASTM E1264-23 Type A, Form A1.4, Pattern Z

**ASTM E84 and CAN/ULC S102 surface-burning characteristics**  
 Class A  
 Flame spread: 25 or less  
 Smoke developed: 50 or less

**UL Type**  
 AP, AP-1, AP-2, AP-3

**Weight**  
 1.55 lb./sq. ft. (Class A)  
 1.72 lb./sq. ft. (Firecode<sup>®</sup> weight)

**Online tools**  
 usgdesignstudio.com or cgcdesignstudio.com

**Thermal resistance**  
 R-1.7 (Class A)  
 R-1.3 (Firecode<sup>®</sup>)

**Maximum backloading**  
 See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

**Texture**  
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

- Notes**
- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
  - Firecode<sup>®</sup> products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation.
  - LR values are shown as averages.
  - For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102).
  - To highlight the unique texture of USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance, choose light colors. See Colors selector for more information.
  - This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

#### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1841/rev. 8-23  
 © 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by  
 USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, IDENTITEE, SANDRIFT, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

