Construction Solution Details: LEVELROCK® Floor Underlayment Installed After Drywall

This USG System Detail must not be used without a complete evaluation by owner's design professional to verify the suitablity of its use with your specific application.

Deep Fill No Framing
1” Min. LEVELROCK Over EPS Foam (wood substrate)

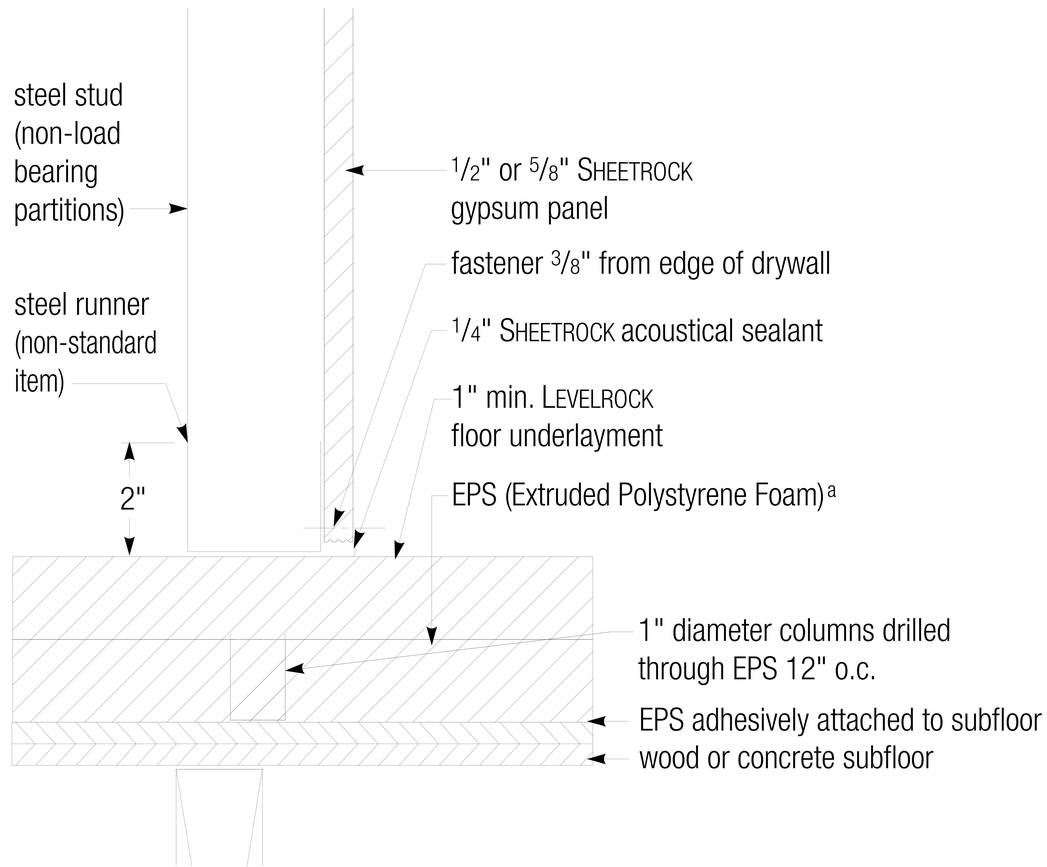

(a) EPS must meet physical properties of ASTM C578-85 for Type IV or Type IX Board

USG Corporation
125 South Franklin Street
Chicago, IL 60606-4678

Architectural and Technical Solutions
800-874-4968

Drawn by:	SK	**Date:**	August 30, 2006
Approved:	MW	**Date:**	
Revision:		**Change:**	
Scale:	3” = 1’-0”	**Project:**	SA305/rev 9-05 Details
		File:	