Construction Solution Details: Elevator Door Rough Opening

This USG System Detail must not be used without a complete evaluation by owner's design professional to verify the suitablity of its use with your specific application.

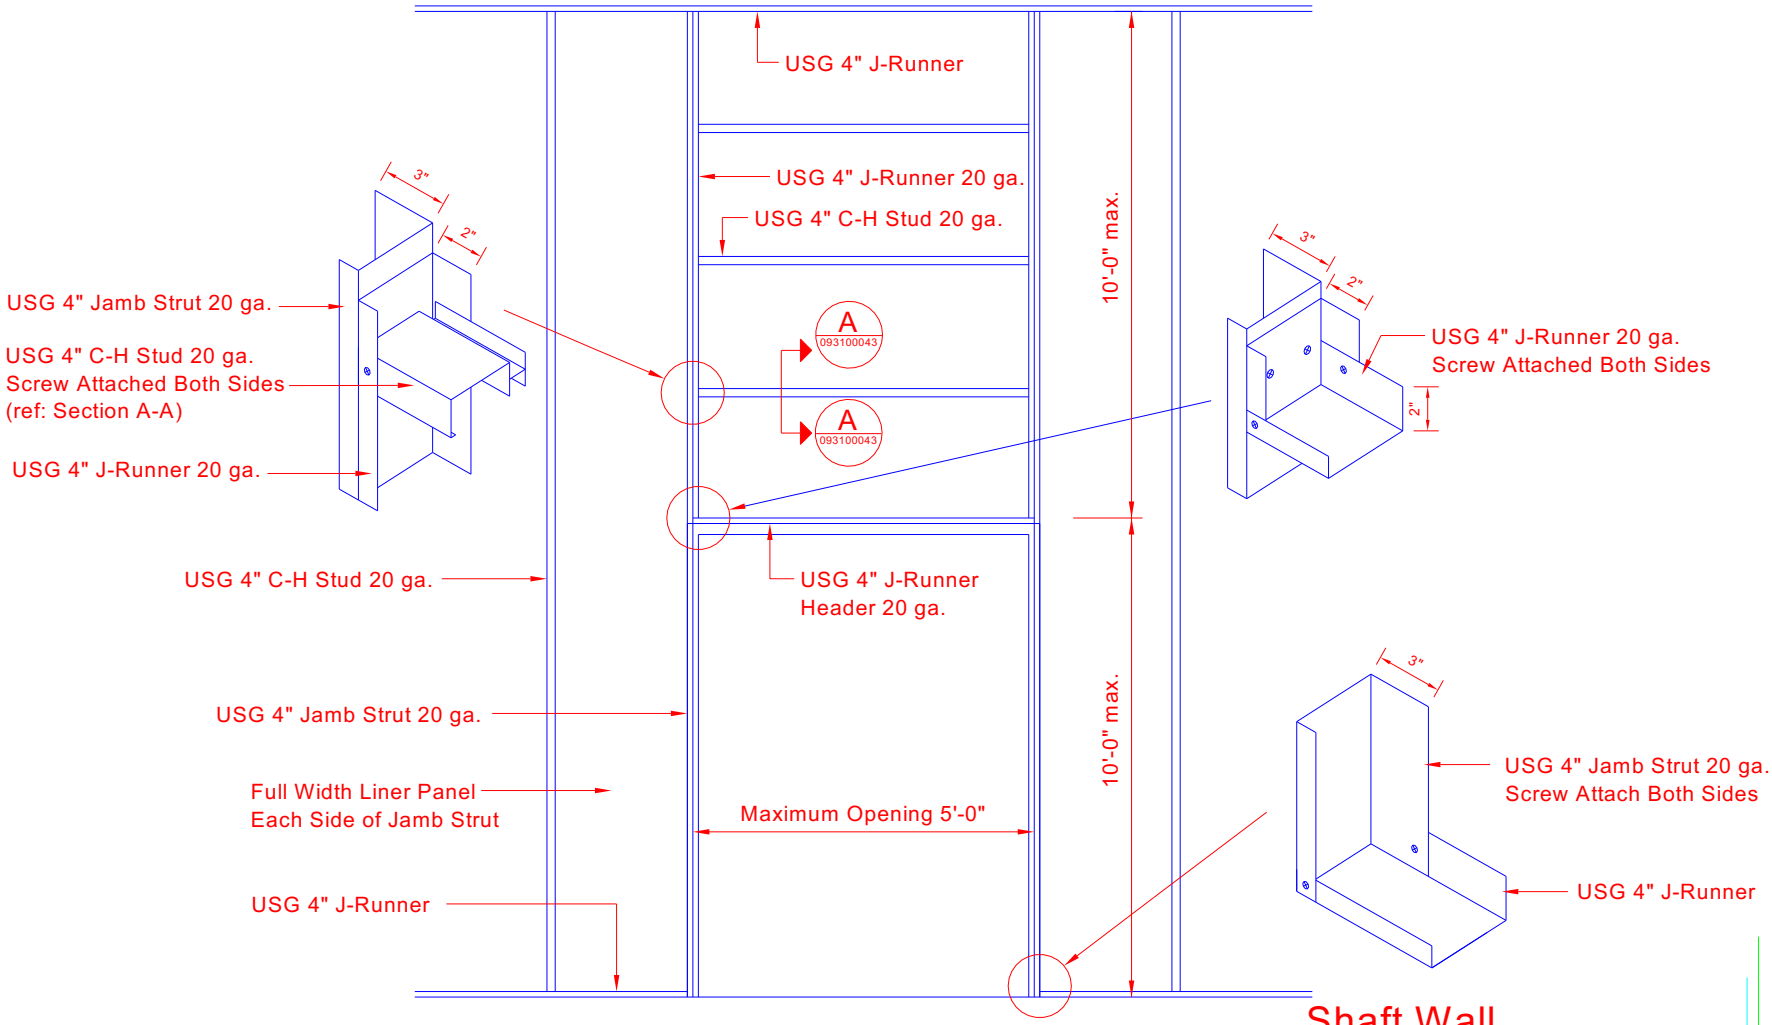

USG Corporation
125 South Franklin Street
Chicago, IL 60606-4678

Architectural and Technical Solutions
800-874-4968

Drawn by:	N/A	Date:	August 16, 2006
Approved:	SM	Date:	
Revision:	DN	Change:	
Scale:	Not to Scale	Project:	
		File:	093100042

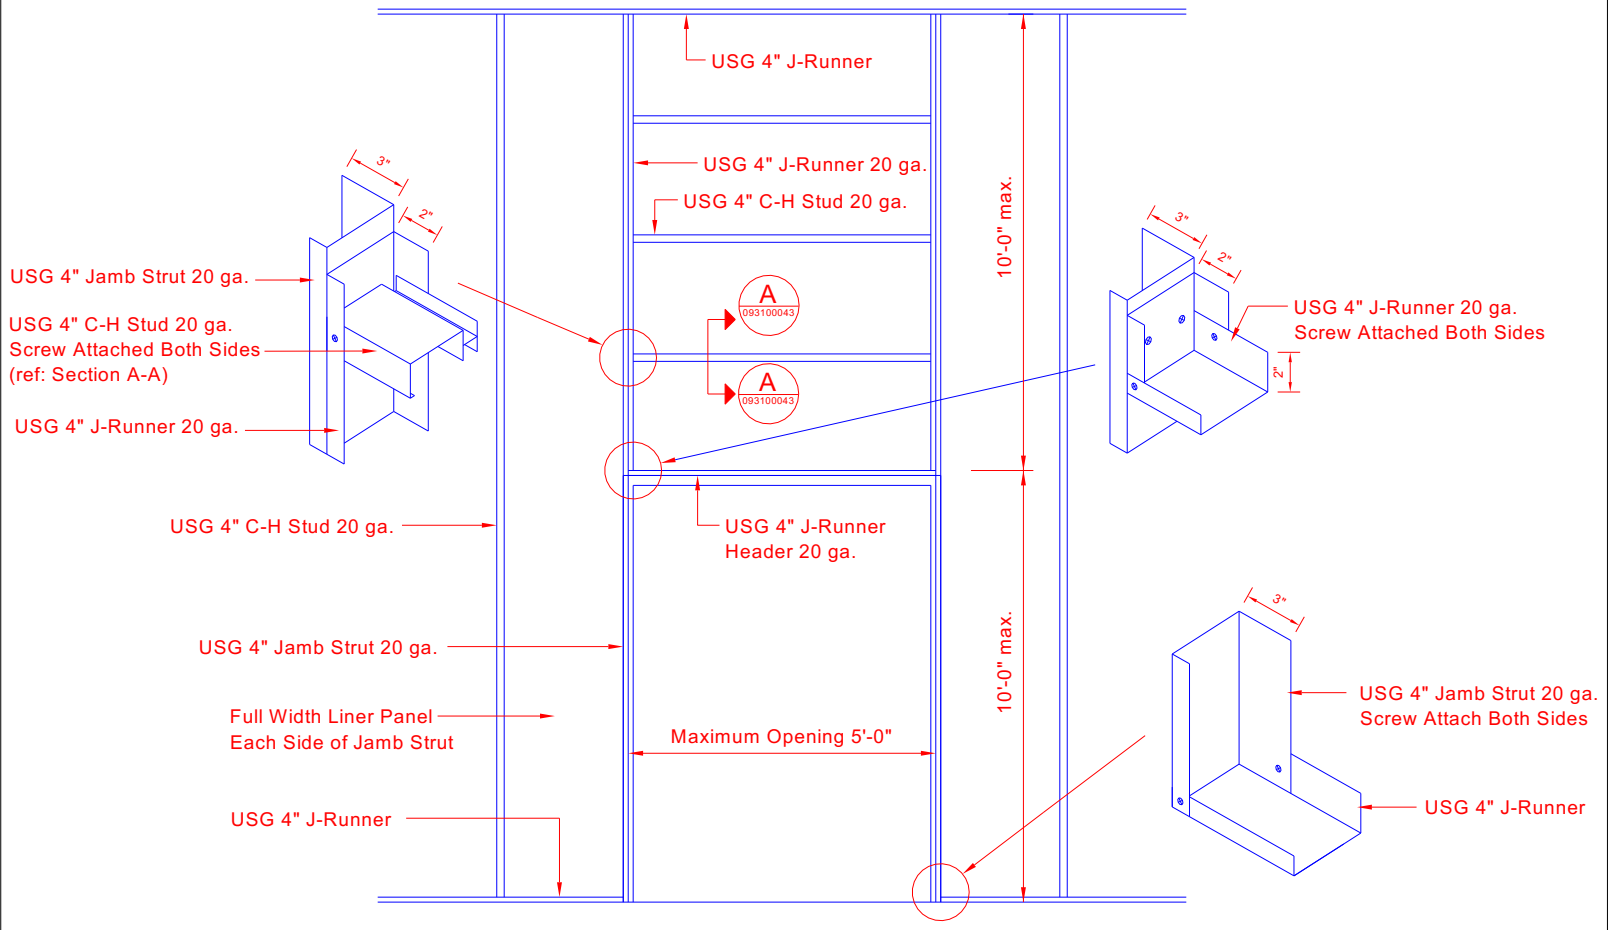
USG 4" J-Runner
USG 4" J-Runner 20 ga.
USG 4" C-H Stud 20 ga.
3"
2"
USG 4" Jamb Strut 20 ga.
USG 4" C-H Stud 20 ga.
Screw Attached Both Sides
(ref: Section A-A)
USG 4" J-Runner 20 ga.
A
093100043
A
093100043
10'-0" max.
3"
2"
USG 4" J-Runner 20 ga.
Screw Attached Both Sides
2"
USG 4" C-H Stud 20 ga.
USG 4" J-Runner
Header 20 ga.
10'-0" max.
3"
USG 4" Jamb Strut 20 ga.
Full Width Liner Panel
Each Side of Jamb Strut
Maximum Opening 5'-0"
USG 4" Jamb Strut 20 ga.
Screw Attach Both Sides
USG 4" J-Runner
USG 4" J-Runner

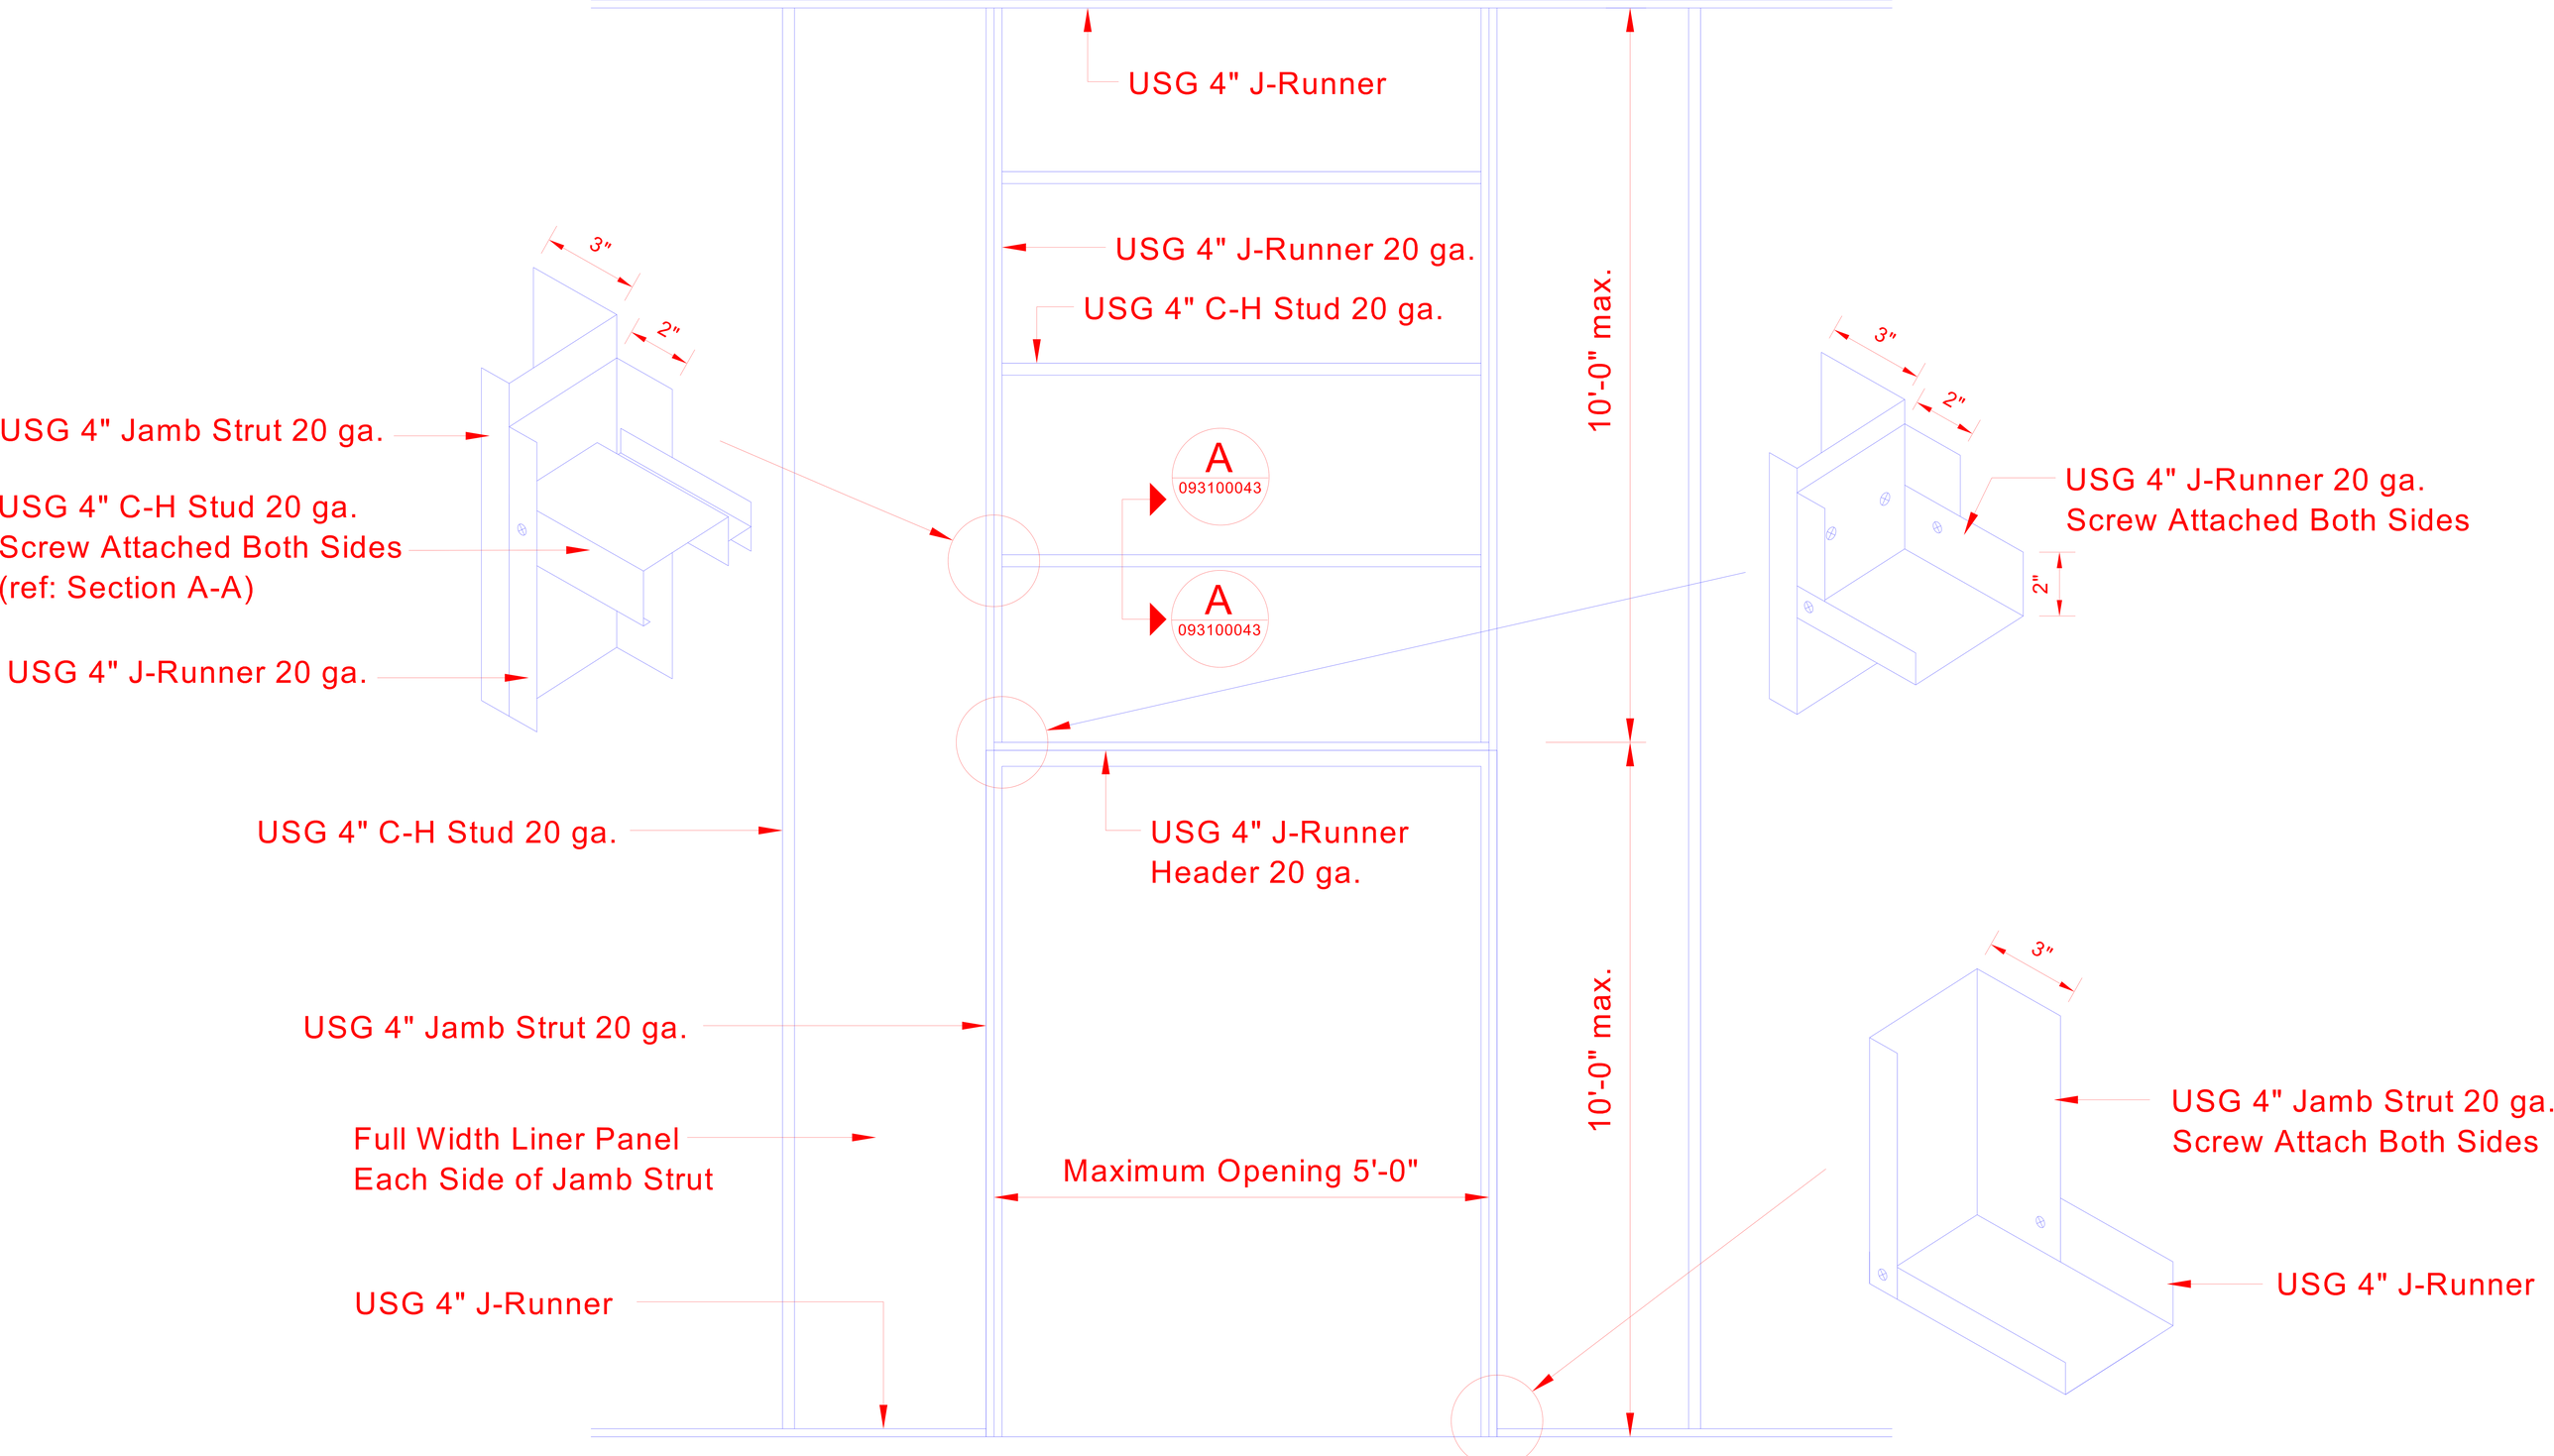
USG 4" J-Runner
USG 4" J-Runner 20 ga.
USG 4" C-H Stud 20 ga.
10'-0" max.
3"
2"
USG 4" Jamb Strut 20 ga.
USG 4" C-H Stud 20 ga.
Screw Attached Both Sides
(ref: Section A-A)
USG 4" J-Runner 20 ga.
A
093100043
A
093100043
USG 4" J-Runner 20 ga.
Screw Attached Both Sides
USG 4" C-H Stud 20 ga.
USG 4" J-Runner
Header 20 ga.
USG 4" Jamb Strut 20 ga.
Full Width Liner Panel
Each Side of Jamb Strut
Maximum Opening 5'-0"
USG 4" J-Runner
USG 4" Jamb Strut 20 ga.
Screw Attach Both Sides
USG 4" J-Runner