


USG SHEETROCK® BRAND LAY-IN GYPSUM CEILING PANELS

CLIMAPLUS™ PERFORMANCE

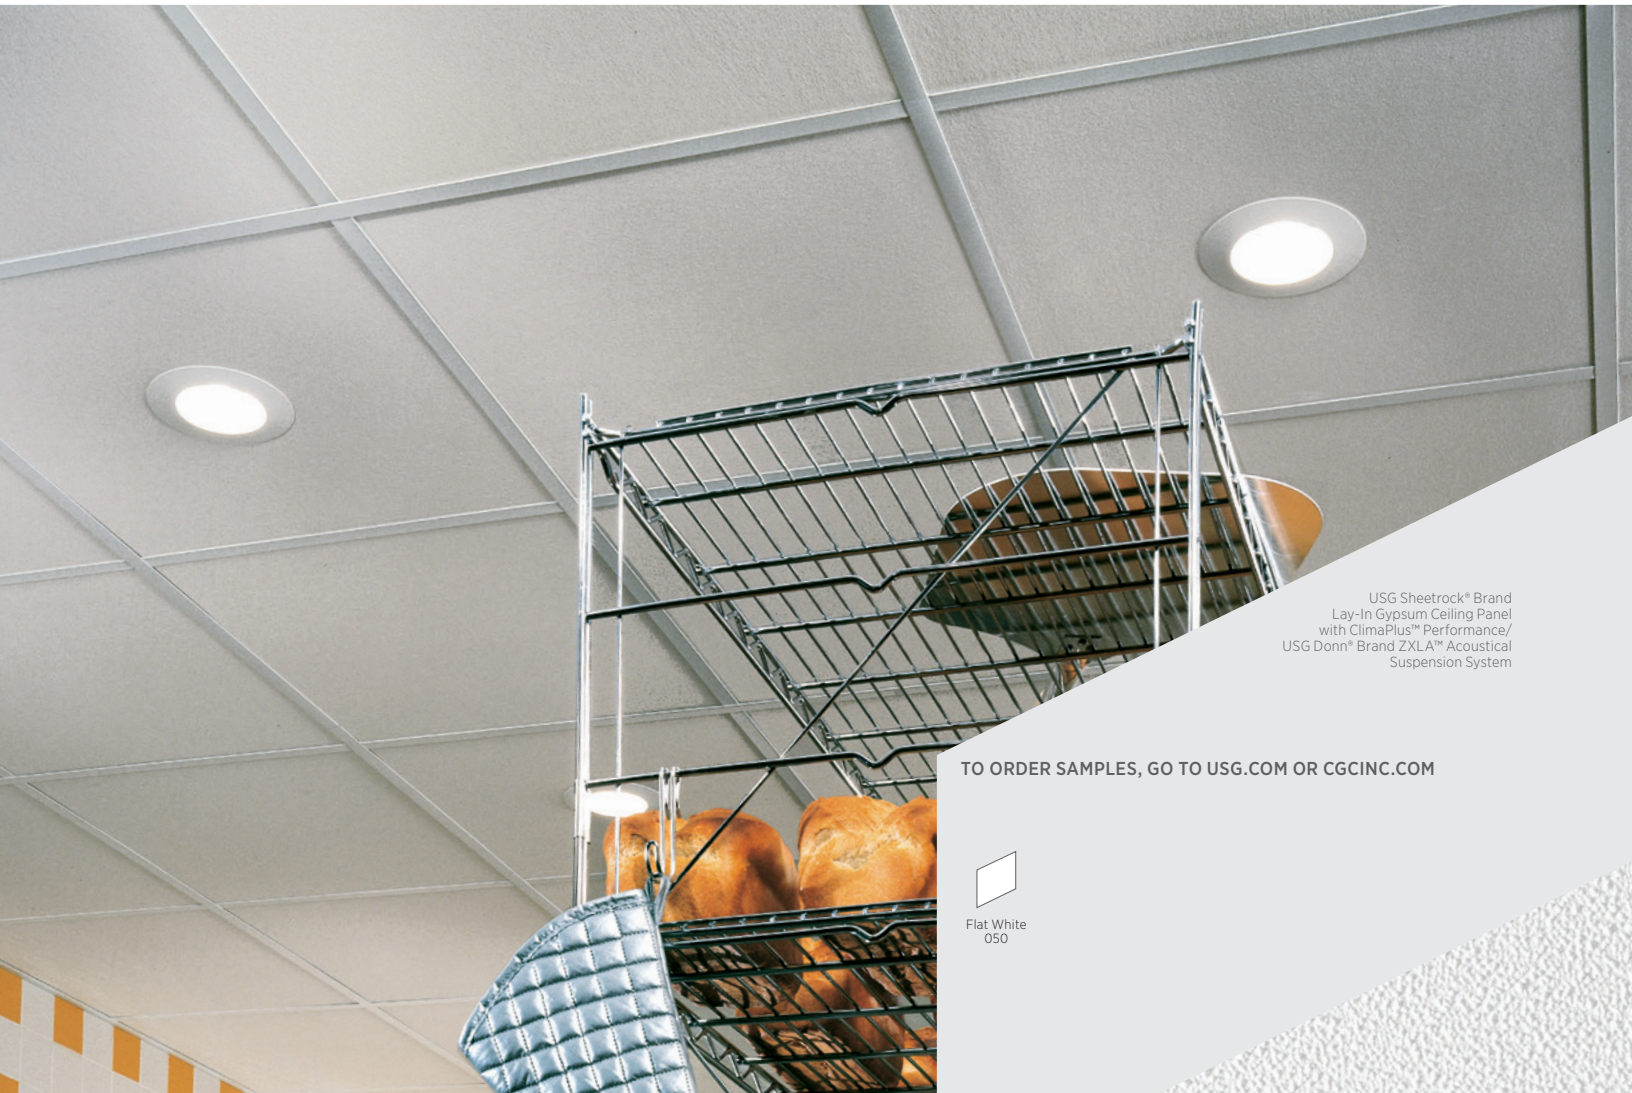

USG Sheetrock® Brand
Lay-In Gypsum Ceiling Panel
with ClimaPlus™ Performance/
USG Donn® Brand ZXL™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- USG Clean Room™ panels have a vinyl-laminated face with sealed back and edges for use in cleanroom environments up to Class 100/ISO 5.
- Washable and scrubbable finish, impact and scratch resistant.
- USDA Certified Biobased Product.⁷
- Panels meet USDA/FSIS requirements for food processing areas.
- ClimaPlus™ 30 year limited system warranty against visible sag.

APPLICATIONS

- Kitchens and Food Preparation Areas
- Restrooms and Utility Areas
- Locker Rooms
- Parking Garages
- Exterior Protected Soffits

SUBSTRATE

- Gypsum Panel

Smooth-Textured Panel - Vinyl

USG SHEETROCK® BRAND LAY-IN
GYPSUM CEILING PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818

30 YEAR LIMITED SYSTEM
WARRANTY
• No Visible Sag
• Mold/Mildew Protection

10 YEAR AVAILABILITY
3270



USG SHEETROCK® BRAND
LAY-IN CEILING PANEL

USG SHEETROCK® BRAND
LAY-IN CEILING
PANEL CLEAN ROOM™ 5

GRID PROFILE OPTIONS

PHYSICAL DATA/
FOOTNOTES

Edge	Panel Size	Fire Rating ²	Item No.	NRC ⁴	CAC Min.	LR ³	Color	Abuse Resistant	Grid Options	VOC Emissions	Recycled Content ¹	Panel Cost
SQ	2'x2'x1/2"		3260	–	35	0.77	White		A, B, C, D	Low	8%	\$
	2'x4'x1/2"		3270	–	40	0.77	White		A, B, C, D	Low	8%	\$
SQ	2'x4'x1/2"		3200	–	40	0.77	White		A, B, C, D	Low	8%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.

Firecode®

Abuse Resistant

A USG DXL™	B USG DXLA™	C USG ZXLA™	D ⁶ USG CE™

Product literature
Data sheet: SC1820

ASTM E1264 classification
ASTM E1264-22 Type XX, Pattern G
ASTM E1264-23 Type G, Form G2, Pattern G

ASTM E84 and CAN/ULC S102
surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FC-CB

Weight
1/2" = 2.00 lb./sq. ft.

Online tools
usgdesignstudio.com, cgcdesignstudio.com
or usg.ecomedes.com

Thermal resistance
R-0.45

Maximum backloading
See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Application considerations
Product is directional. Install with all manufactured edges parallel and in the same direction.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation.
- LR values are shown as averages.
- NRC rating is 0.10. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- Field-cut edges of USG Clean Room™ panels must be sealed with white latex paint.
- Clean Room-rated applications require a suspension system with gasketed tee flanges such as USG Donn® Brand CE™.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1820/rev. 7-24
© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CE, CLEAN ROOM, CLIMAPLUS, DONN, DXL, DXLA, FIRECODE, SHEETROCK, ZXLA, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

