



High Recycled Content



PARALINE Linear Metal Ceiling System with Field-Applied Custom Paint

LEED Credits

Recycled Content: Up to 90%

| MR | | | | EQ | | |
|-----------------|------------------|---------------------------------|-----------------------------|------------------------|--------------------|-------------------------------------|
| Waste Reduction | Recycled Content | Regional Materials ¹ | Rapidly Renewable Materials | Low-Emitting Materials | Daylight and Views | Acoustical Performance ² |
| ● | ● | ● | | | | ● |

Features and Benefits

- Elegant linear metal ceiling system features 12' long metal pans attached to a specially engineered suspension system
- Closed-reveal PARALINE II pans are appropriate for exterior ceiling applications under protected soffits.
- Snap-up design offers unlimited access with minimum plenum depth requirements
- Wind load tested (120 mph) with proper bracing and exterior framing
- Available with perforated pans for PARALINE II for NRC ratings as high as .95 when backed with fiberglass (A-062 perforation pattern only)

Applications

- Exterior soffits
- High-bay areas
- Retail stores
- Transportation terminals



To order samples, go to usg.com

Painted Metals (HRC Finishes)



Flat White



Silver Satin
002



Metallic Copper
1690



Metallic Gold
1691



Metallic Oyster
1652

Anodized Metals



Brushed Aluminum
PIA12






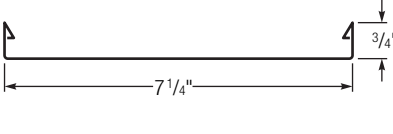
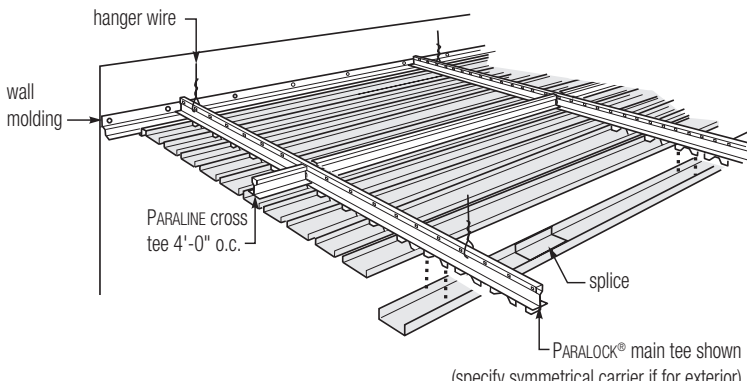
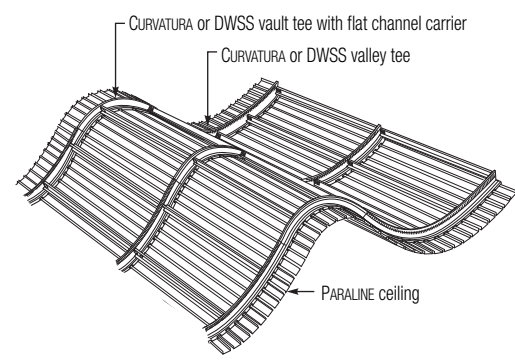
Polished Aluminum
PM61



Polished Brass
PM21



Satin Chrome
PM614

| Product Information | | | |
|---|--|--|--|
| | Materials | Typical Sizes | Finishes |
| | PARALINE I, II, and III: Aluminum | 3-1/4" x 12', 7-1/4" x 12' | Perforation available: PARALINE II only. |
| PARALINE II Perforation Pattern |  | Round—1/16" perforations .235 o.c., 5% open area (Perforation shown 50% actual size) | |
| Details | PARALINE I  | PARALINE II  | PARALINE III  |
| | PARALINE I ceilings use 3-1/4" wide pans with roll-finished edges. Once assembled, the pans provide an open reveal for excellent acoustical control (sound is absorbed by acoustical material in the plenum). | PARALINE II ceilings maintain the 3-1/4" wide pan dimension, but are constructed with integral flanges that overlap to form a reveal closure that is appropriate for exterior soffit applications. Perforated available. | PARALINE III ceilings have bolder, 7-1/4" wide pans for larger-scale applications. Pans have a roll-finished edge to provide the same open reveal as PARALINE I with similar acoustical control. |
| Perspective | USG Drywall Suspension System or CURVATURA Suspension For PARALINE Wave Ceilings | | |
|  |  | | |
| | <p>High Recycled Content Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.</p> | | |

For More Information

Product literature
 System brochure: IC463
 Data sheet: IC315
Online tools
usgdesignstudio.com

Fire-rated designs
 UL fire-rated design number D-218 rating for 2-hour or 3-hour restrained or unrestrained assembly and 3-hour unrestrained beam rating.

Light reflectance
 Flat White: LR-0.80 (less with perforations and other colors).
Recycled content
 PARALINE: up to 90% recycled content.

Footnote
 1. For details, see LEED report generator at usgdesignstudio.com.
 2. PARALINE II with perforation and fiberglass backing.