



TOUCHSTONE Panels with *CLIMAPLUS* Superior Performance/  
DONN DX/DXL Suspension System

### LEED Credits

Recycled Content: 48%  
*CLIMAPLUS* Superior Performance for Mold and mildew

MR				EQ		
Waste Reduction <sup>1</sup>	Recycled Content	Regional Materials <sup>2</sup>	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

### Features and Benefits


- Panels are scuff- and abuse-resistant and can withstand day-to-day activity in high traffic areas.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a DONN® brand suspension system.
- FIRECODE™ formulation designed to meet life safety codes.

### Applications

- Schools
- General offices
- Retail stores

### Substrate

- Water-felted mineral fiber

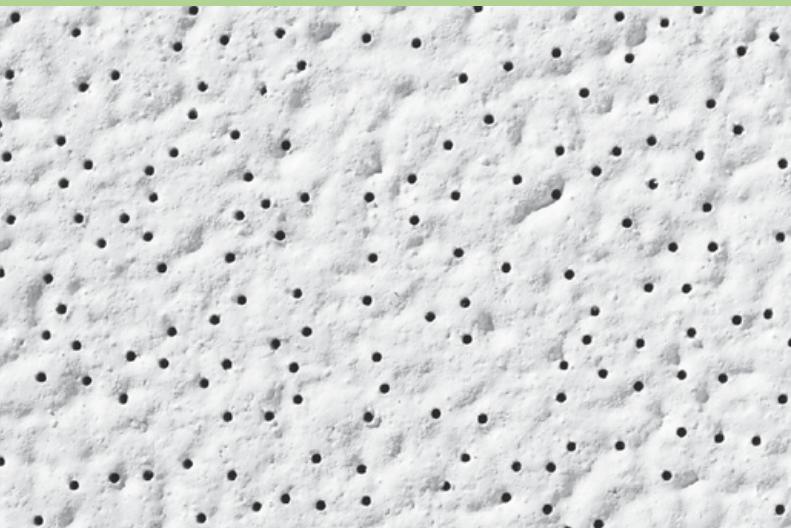

Medium-textured panel

Call 888.874.2450 for samples



White

**30**

Year System Warranty  
 – No visible sag  
 – Mold/mildew protection

TOUCHSTONE  
*ClimaPlus* Panels

UL Classified													
Edge	Panel Size	Class <sup>3</sup>	Item No.	NRC	CAC Min.	LR <sup>4</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse-Resistant	Recycled Content <sup>5</sup>	Panel Cost
TOUCHSTONE <i>ClimaPlus</i> Panels	SQ 	2' x2' x5/8"	5893	.55	35	.86	White	A, B, C	Low			48%	\$\$
		2' x4' x5/8"	5894	.55	35	.86	White	A, B	Low			48%	\$\$
	SLT 	2' x2' x5/8"	5896	.55	35	.86	White	D	Low			48%	\$\$
	FLB 	2' x2' x5/8"	5899	.55	35	.86	White	E, F, G, H, I, J	Low			48%	\$\$

**Legend**

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

*ClimaPlus* Superior Performance<sup>6</sup>

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold and mildew.

**Grid Profile Options**

A	B	C	D	E	F	G	H	I	J
DX <sup>®</sup> /DXL™	DXW™	CENTRICITEE™ DXT	DX/DXL	CENTRICITEE <sup>®</sup>	CENTRICITEE DXLT	FINELINE <sup>®</sup> DXF	FINELINE <sup>®</sup> 1/8 DXFF	FINELINE <sup>®</sup> DXLF	IDENTITEE™ DXI™

**Physical Data/  
Footnotes**

**Product literature**  
 Data sheet: SC2214

**ASTM E1264 classification**  
 Type III, Form 2, Pattern CEI

**ASTM E84 surface burning characteristics**  
 Class A  
 Flame spread: 25  
 Smoke developed: 50

**Weight**  
 1.0-1.3 lb./sq. ft.

**Thermal resistance**  
 R-1.6

**Maximum backloading**  
 See Warranty for details.

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum.

**Footnotes**

1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. Fire-rated items: see UL design details.
4. LR values are shown as averages.
5. For details, see Sustainability selector.
6. Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial standard formulation that

inhibits and retards the growth of mold and mildew. For details, see *Ceiling Systems Limited Warranty Commercial Applications* (SC2102) and *ClimaPlus Ceilings Certification of Performance* (SC2451).

