



True Wood Panels  
D0NN IDENTITEE DXI

**LEED Credits**  
Recycled Content: 97%


| MR                           |                  |                                 |                             | EQ                     |                    |                        |
|------------------------------|------------------|---------------------------------|-----------------------------|------------------------|--------------------|------------------------|
| Waste Reduction <sup>1</sup> | Recycled Content | Regional Materials <sup>2</sup> | Rapidly Renewable Materials | Low-Emitting Materials | Daylight and Views | Acoustical Performance |
| ●                            | ●                | ●                               | ●                           | ●                      |                    | ●                      |

**Features and Benefits**

- The elegance, warmth and majesty of true wood
- Natural wood veneers
- Standard panel sizes of 2'x2', 2'x4' and linear
- Plank sizes: 1'x4', 1'x5', 2'x6', 2'x8', 20"x60", 30"x60"
- Acoustical options, with an integrated acoustical backer
- FSC certified
- Class A fire rating per ASTM E1264

**Applications**




- Schools
- Healthcare
- Conference rooms
- Restaurants
- Retail stores

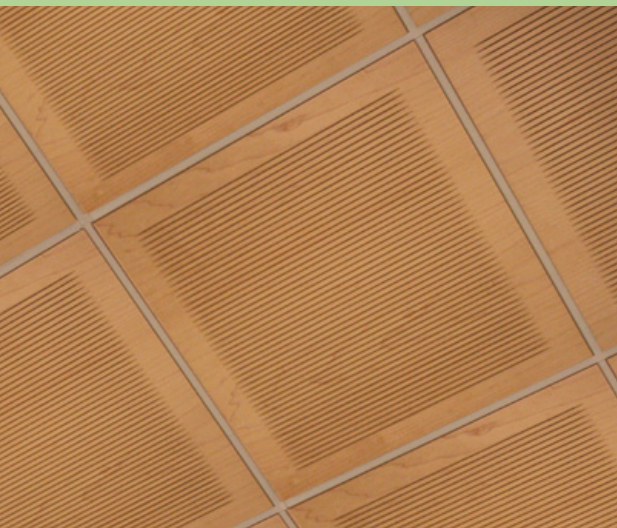


2' x 2' True Wood W500 with Border

To order samples, go to [usg.com](http://usg.com)








|                         |   | Lay-In Panels |            | Planks     |            |            |            |              |              |
|-------------------------|---|---------------|------------|------------|------------|------------|------------|--------------|--------------|
| True Wood Lay-in Panels | FL<br> | 2'x2'x3/4"    | 2'x4'x3/4" | 1'x4'x3/4" | 1'x5'x3/4" | 2'x6'x3/4" | 2'x8'x3/4" | 20'x60"x3/4" | 30'x60"x3/4" |
|                         | SL<br> |               |            |            |            |            |            |              |              |
|                         | AR<br> | 2'x2'x3/4"    | 2'x4'x3/4" |            |            |            |            |              |              |

All USG True Wood perforated and channel panels include an integrated acoustical backer to provide a high level of sound performance without the expense and additional labor of infill panels.  
 NOTE: All True Wood Panels must be installed with stabilizer bars. See form # IC592.

| Panel Size                                   | Class   | Grid Options | NRC | CAC | Trim Options             |  |
|--|---|--------------|-----|-----|--------------------------|--|
|  |  |              |     |     | 4" Nominal (3 3/4" x 8') |  |
| <b>Nominal 4 1/2" Module<br/>3 3/4" x 8'</b> | Class A   | DWSS         | .40 | —   | 6" Nominal (5 1/4" x 8') |  |
| <b>Nominal 6" Module<br/>5 1/4" x 8'</b>     | Class A   | DWSS         | .35 | —   |                          |  |


Linear panels have a black fabric backing that overlaps panel to panel to create a clean black look in the reveal.

|                      | D<br>DX/DXL   | E<br>CENTRICITEE<br>DXT   | F<br>FINELINE®<br>DXF   | G<br>FINELINE® 1/8<br>DXFF  | H<br>IDENTITEE™<br>DXI™   |
|----------------------|---|---|---|---|---|
| Grid Profile Options |  |  |  |  |  |

|                      | Pattern Number | Hole (mm) | Spacing (mm) | % Open Area | NRC |
|----------------------|----------------|-----------|--------------|-------------|-----|
| Perforation Options* | W100           | 6         | 16           | 10          | .60 |
|                      | W200           | 6         | 32           | 3           | .30 |
|                      | W300           | 8         | 16           | 20          | .70 |
|                      | W400           | 8         | 32           | 5           | .40 |

|                  | Pattern Number | Channel Width | Channel Depth | Spacing      | Border | NRC |
|------------------|----------------|---------------|---------------|--------------|--------|-----|
| Channel Options* | W500           | 2mm           | 3.8mm         | 10mm centers | —      | .65 |
|                  | W500 (Border)  | 2mm           | 3.8mm         | 10mm centers | 25.4mm | .55 |
|                  | W600           | 2mm           | 3.8mm         | 5mm centers  | —      | .75 |
|                  | W600 (Border)  | 2mm           | 3.8mm         | 5mm centers  | 25.4mm | .65 |

\* Not available in linear panels

|                             |   |   |   |  |   |
|-----------------------------|---|---|---|--|---|
| Physical Data/<br>Footnotes | <b>Product literature</b><br>Data sheet: IC558<br>Finishes Sheet: IC559<br>Tech Guide: IC561          | <b>ASTM E1264 Classification</b><br>Composite — Class A Fire Performance                                    | <b>Footnotes</b><br>Color disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output. | Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray applied stain or sealer coats. |  <b>High Recycled Content</b><br>Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines. |
|                             | <b>ASTM E84 surface burning characteristics</b><br>Class A<br>Flame spread: 20<br>Smoke developed: 15 | <b>Weight</b><br>3 lb./sq. ft.<br><b>Material</b><br>No added urea formaldehyde core, with face cut veneers | These representations should not be used to finalize color selection(s).  |  |   |

