

# Roof Board Applications

There are four basic components in a low-slope commercial roof assembly:


- A structural deck and joists, which can be formed of steel, wood or concrete
- Insulation, including polyisocyanurate (ISO), extruded polystyrene (XPS) or expanded polystyrene (EPS)
- Roof cover board installed between the insulation and the roofing membrane to protect the insulation and support the membrane, improving fire protection, traffic and hail resistance, and wind uplift performance
- A membrane or membrane system, which can be built-up roofing (BUR), single-ply or modified bitumen

The following are for illustration purposes only. SECUROCK® High-Performance roof boards are engineered to perform within a properly designed roof system. The use of SECUROCK High-Performance roof boards as a roofing component is the responsibility of the design professional. Consult roofing manufacturers for specific instructions on the application of their products to SECUROCK High-Performance roof boards.


## Cover Board

SECUROCK High-Performance roof board is placed directly below the roofing membrane, providing primary support for the membrane and protecting the underlying insulation layer from damage during installation and for the service life of the roof. Cover boards are used for impact protection for insulation boards (foot traffic, hail, etc.), to protect insulation from EPDM heat transfer, as a surface to which asphalt can be mopped, and as a fire barrier for external fire.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

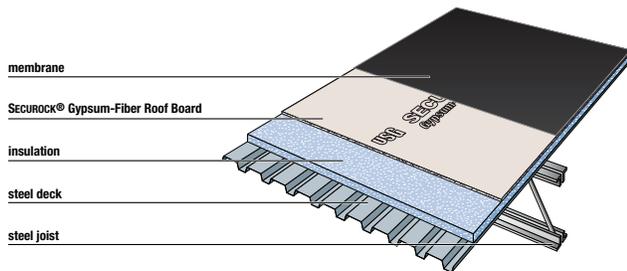


**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

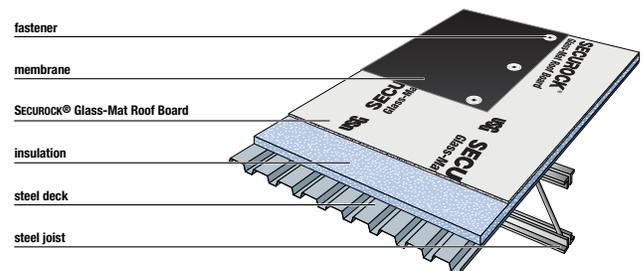


## Roof Recover Board

SECUROCK High-Performance roof board is placed over the existing membrane surface, where it functions as a separator and a support layer between the old roof and the new roofing membrane. Roof recover boards provide a flat substrate for new roofs and have all of the benefits of a cover board.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

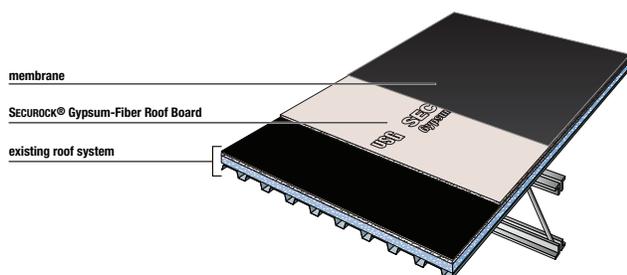


**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

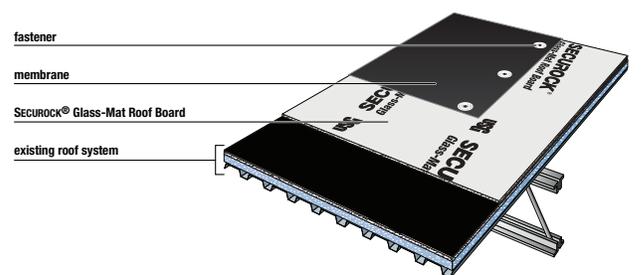

**Hot Asphalt Substrate (Hot Mop)**

SECUROCK® Gypsum-Fiber roof board can be mechanically fastened, bonded with mastic or adhesives or hot mopped to foam insulation. All hot-applied roofing systems can then be mopped directly onto the unprimed roof board without concern for blistering or delamination. Securock Gypsum-Fiber is your best option for hot mopping.


**SECUROCK® Gypsum-Fiber roof board only.**

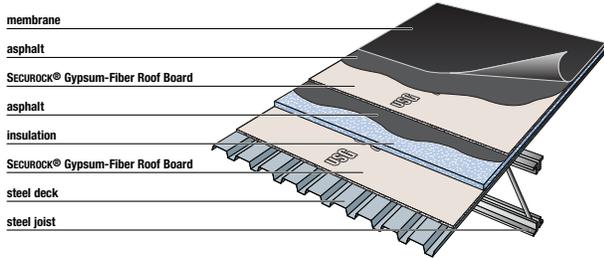


**Substrate for Vapor Retarders**

SECUROCK High-Performance roof board is placed over the roof deck to provide support for the vapor barrier. The membrane may be loose laid; attached with cold mastics, hot asphalt or adhesives; or mechanically fastened, depending on the roof assembly. The roof board is used as a substrate for retarder to adhere to in order to reduce condensation.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

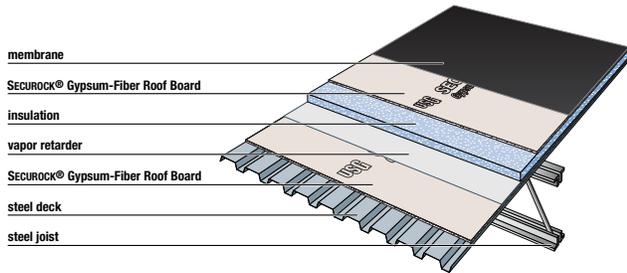


**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

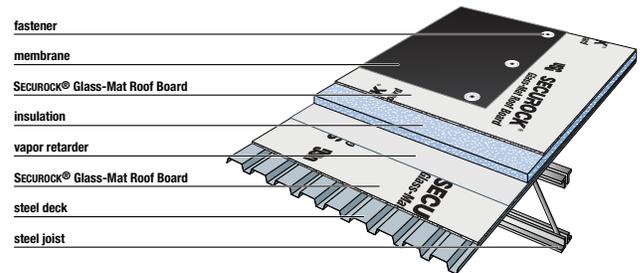


**Metal or Tile Roof Thermal Barrier**

SECUROCK High-Performance roof board provides a thermal barrier in conjunction with a standing-seam metal or tile roofing system. It also provides noise reduction and hail resistance. Thermal barriers reduce thermal "shock" and slow heat escape from building and act as a fire barrier for internal fire.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

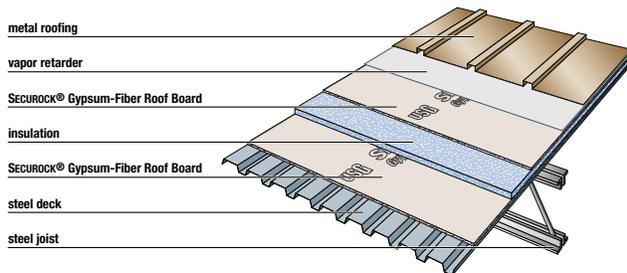


**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

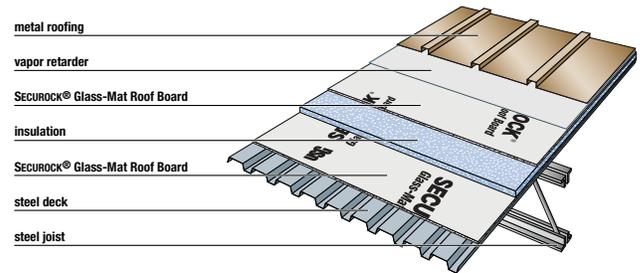


**Thermal Barrier**

Securock High-Performance roof board provides a thermal barrier installed directly to metal deck for both expanded and extruded polystyrene insulation. Thermal barriers reduce thermal "shock" and slow heat escape from building and act as a fire barrier for internal fire.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

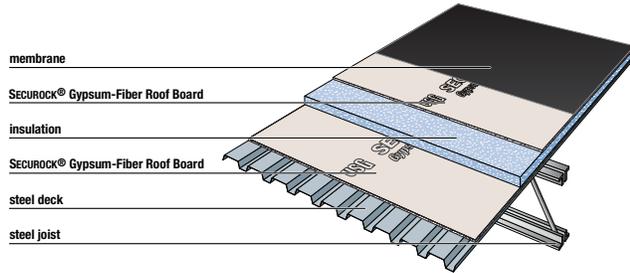


**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

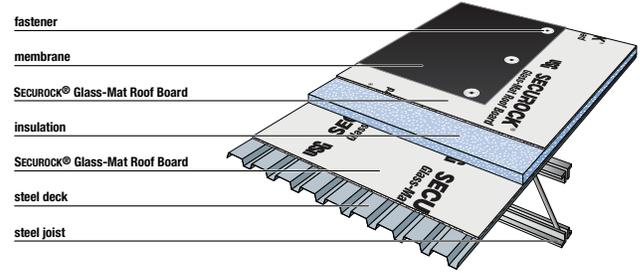


**Fire Barrier Underlayment**

Securock High-Performance roof board is used as a barrier board underlayment below optional rigid foam insulation on a combustibile deck to achieve a Class A, B or C fire-resistance rating. See the UL Building Materials Directory for more information.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

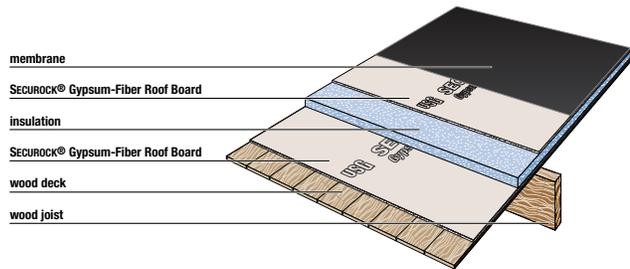


**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

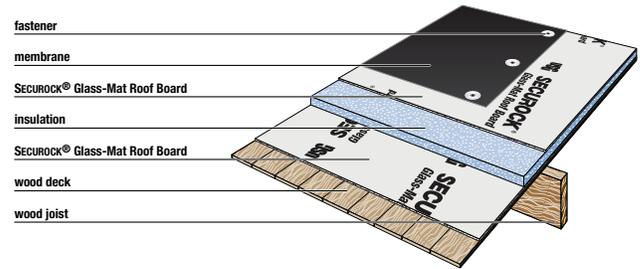


**Parapet Wall Substrate**

Securock High-Performance roof board is fastened to wood or metal framing along the parapet wall for roofing membrane flashing support.

**SECUROCK® Gypsum-Fiber roof board recommended for fully adhered membrane.**

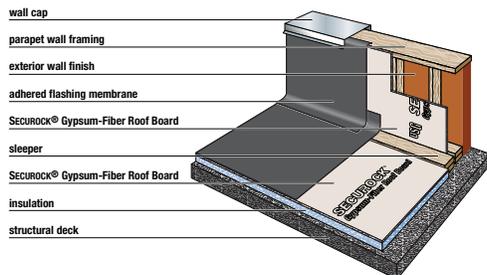

**SECUROCK® Glass-Mat roof board recommended for mechanically attached membrane.**

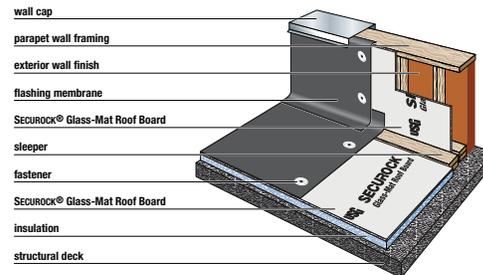

Manufactured by  
CGC Inc.  
350 Burnhamthorpe Rd. W., 5th Floor  
Mississauga, ON L5B 3J1

800-565-6607  
www.cgcinc.com

The CGC Logo is a registered trademark of CGC Inc. CGC Inc. is licensed user of the following trademarks: Securock.

MK\_IND\_SECUROCK\_APPLICATIONS\_E  
2012, CGC Inc.  
Printed in Canada