


# MEDIUM

## DRYWALL INSIDE CORNER FLEX TAPE

Straighter, Stronger  
Twice as Fast, and  
Half the Work!

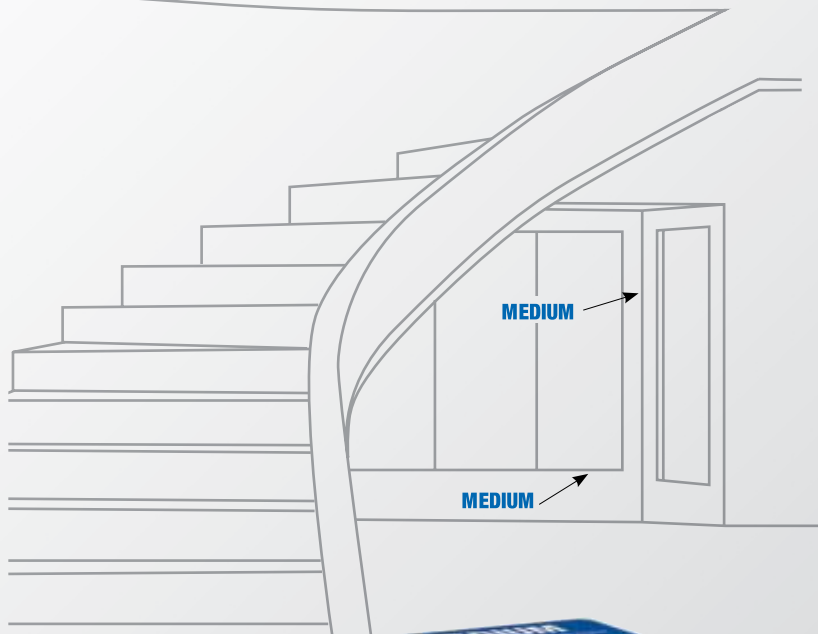

### APPLICATIONS

- Inside 90° corners and angled corners.
- Inside angles of bay windows.
- Inside ceiling corners.

### PRODUCT DESCRIPTION

- Produces straight, strong, and professional inside corners.
- Twice as strong as paper or mesh tapes
- Twice as fast as paper or mesh tapes.
- Slotted edges ensure superior bond.
- Straightens minor framing irregularities for vertical corners.
- Resists dents, paint chipping, shrinkage, and common cracking problems.
- Rustproof.
- Cuts easily with a knife or scissors.
- Installs using standard compounds. No special tools or fasteners needed. No nail pops.
- Second coat of compound can be applied immediately – very light skim-coat to finish.
- Slightly thinner than CGC's Original.

PROFESSIONAL GRADE

**ADVANTAGES OVER COMPETITORS**

MEDIUM	COMPETITOR PAPER TAPES
Straightens Common Drywall Imperfections In Corners	Conforms to Framing Imperfections. Rounds Out When Drying.
Will Not Soften or Sag	Softens and Sags When Wet
Twice as Strong as paper Tape	Tends to Hairline Crack with Temperature Change or Structural Movement
No Blisters or Fuzz-Ups	No Blisters or Fuzz-Ups Fuzzes Up During Sanding
Superior Bonding	Good Bonding
Ideal for Novice or Pro	Requires Skill or a Professional

**DIRECTIONS FOR USE**

- 1 Measure and cut MEDIUM using a utility knife or scissors. Fold MEDIUM in half at center crease with print size facing each other. For inside corners, fold less than desired angle with print side facing out.
- 2 Most professionals prefer to cut the ends of MEDIUM at a 45° angle.
- 3 With a 4" or 5" taping knife, apply a smooth, liberal coat of compound to corner. Press MEDIUM into the wet compound. Adjust if necessary to create a straight line.
- 4 Wipe down tight with taping knife using a little additional pressure on the outer edges of MEDIUM. Immediately apply a light skim coat of compound over surface of MEDIUM. Wipe down tight and smooth. Let dry completely over several hours or overnight.
- 5 With a 6" or 8" taping knife, apply your final coat of compound feathering the compound beyond previous coat. For inside corners, a very light coat of compound is all that's needed. Let dry completely over several hours or overnight.
- 6 Sand lightly with 150 grit sandpaper. MEDIUM will not fuzz-up like other paper or mesh tapes.

**SPECIFICATIONS**

- 57mm x 30.5 m roll size (2 1/4" x 100')
- Color Code BLACK
- Item#: Medium-681135  
UPC: 069606003655  
Case Pack: 12 rolls.  
24 cases per pallet  
Pallet weight: 327kg (721lb)

**STORAGE**

Store in a dry place protected from moisture.

Manufactured by Strait-Flex for CGC Inc.  
350 Burnhamthorpe Rd. W, 5th Floor,  
Mississauga, ON L5B 3J1

For product information call 1-800-387-2690 or go to [cgcinc.com](http://cgcinc.com)

