


USG DONN® BRAND DXW™ ACOUSTICAL SUSPENSION SYSTEM

USG Donn® Brand DXW™
Acoustical Suspension System/
USG Eclipse™ Acoustical Panels with
ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS

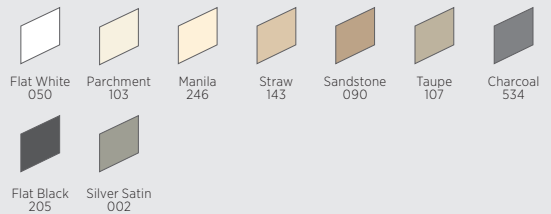


ADVANTAGE COLOR




POWDER-COATED FINISH



PROFILE



EDGE DETAIL



FEATURES AND BENEFITS

- 1-1/2" exposed grid system. Design alternative for high-bay areas and large panel modules.
- Cross-tee override-ends resist twisting.
- Complies with all national code requirements.
- Proprietary Quick-Release™ cross tees.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).

APPLICATIONS


- Interior general-use areas
- High-bay areas
- Large-module ceilings

USG DONN® BRAND DXW™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative



TECHNICAL SERVICES
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com





Declare® Labels on select finishes, see usg.com for more details and documentation.

1-1/2" TEE SYSTEM



MOLDING^{3,4}



ASTM Class	Length	Height	Item No.	Fire Rating	Color ²	Seismic Design Category		Rated Load ¹		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing
Heavy Duty	12'	1-1/2" 38 mm	DXW26 	Class A	Standard	A-F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	4.9 lb./LF
	2'	1-1/2" 38 mm	DXW224	Class A	Standard	—	—	36.7 lb./LF	—	—
	4'	1-1/2" 38 mm	DXW424	Class A	Standard	—	—	13.8 lb./LF	—	—
Wall Angle	Length	Item No.	Color	Wall Angle	Length	Item No.	Color			
	12'	M7 	Standard		10' 3000 mm	M20	Flat White			
	12'	M12	Standard							

Low Emissions (VOC)
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

High Recycled Content
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
Data sheet: AC3037
Sample: 219168

Material
Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint or powder-coated finish.

Installation
Install according to ASTM C636, ASTM E580, Cisca and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

LA Research Report - RR 25764
Refer to usg.com for most current version.

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance
Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Notes
1. Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
2. Custom colors available.
3. For more information on moldings, see Perimeter Interface selector.
4. Panels must be field-cut to size at the perimeter.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3037/rev. 6-22
© 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, DXW, ECLIPSE, QUICK-RELEASE, IT'S YOUR WORLD, BUILD IT!, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

