

# USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING



USG Donn® Brand DXT™ Transition Molding with USG Mars™ Acoustical Panels/USG Donn® Brand Fineline® DXF™ Acoustical Suspension System


TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

## USG DONN® BRAND TRANSITION MOLDING COLOR



Flat White  
050

## PROFILE

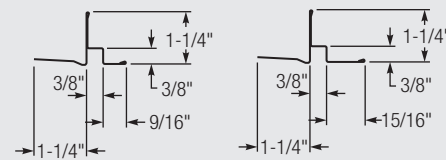

## FEATURES AND BENEFITS

- Roll-formed, hot-dipped galvanized steel trims for creating transitions between drywall and acoustical ceilings.
- One-piece acoustical wall molding with an integrated drywall taping flange.
- Eliminates the need to construct drywall fascias for wall molding attachment.
- Taping flange is knurled and perforated to accept joint compound.
- Factory painted to match USG Donn® Brand acoustical suspension systems.
- Compatible with all USG Donn® Brand and USG Drywall suspension systems.

## APPLICATIONS

- Contemporary Offices
- Entertainment
- Hospitality
- Healthcare
- Retail
- Education

# USG DONN® BRAND TRANSITION MOLDING

## DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING

**ORDER SAMPLES/LITERATURE**  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

**TECHNICAL SERVICES**  
 800.USG.4YOU (874-4968)

**FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL**  
 usgdesignstudio.com  
 cgcdesignstudio.com  
 usg.ecomedes.com

### COMPONENTS


USG Donn® Brand SL DXT™

Profile	Item Number	Exposed Leg	Reveal	Length	Pieces/Carton	LF/Carton
	CPDWA9120	9/16"	3/8" x 3/8"	120"	12	120
	CPDWA15120	15/16"	3/8" x 3/8"	120"	12	120

USG Donn® Brand SL DX®

### INSTALLATION DETAILS

Shadowline USG Donn® Brand Transition Molding, Drywall to Acoustical Assembly Elevation

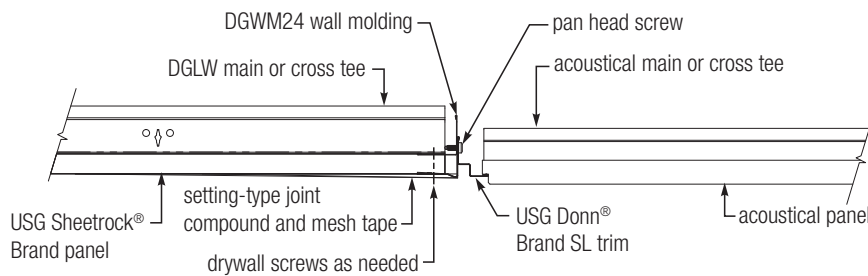

### Low Emissions (VOC)

CDPH 01350 v1.2-2017 compliance on select finishes, see usg.ecomedes.com for more details and documentation.

### RECOMMENDED FINISHING INSTRUCTIONS

1. Embed mesh tape over flange with setting-type joint compound.
2. Apply second coat of setting-type or ready-mixed joint compound.
3. Apply third coat if needed.

#### Note:

For complete installation instructions, refer to installation guide AC3318.

### PHYSICAL DATA/ FOOTNOTES

**Product literature and samples**  
 Data sheet: AC3315  
 Installation guide: AC3318  
 Sample: 259401

**Online tools**  
 usgdesignstudio.com, cgcdesignstudio.com  
 or usg.ecomedes.com

**Material**  
 Min. G30 hot-dipped galvanized steel.  
 Baked-on polyester paint.

**Note**  
 For availability in Canada, please contact your local sales representative.

#### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

**AC3315/rev. 7-24**  
 © 2024 USG Corporation and/or its affiliates. All rights reserved.  
 Printed in U.S.A.

Manufactured by USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXF, DXT, FINELINE, MARS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

