

USG DUROCK™ BRAND TILE BACKER SCREWS



USG Durock™ Brand Screws are high-quality, corrosion-resistant fasteners specially designed for attaching various types of backboards and underlayments to wood or steel framing members.

- Can be used for interior and exterior applications.
- Corrosion-resistant coating. Designed to resist 1500+ hours of salt-spray testing before developing 5% red rust (per ASTM B117).
- The Recex® Robertson/Phillips combo drive produces a cling fit that reduces driving effort, promotes faster driving and extends bit life.
- Features a large wafer-type head that provides exceptional holding power.
- Strip-out prevention ribs prevent “pull through.”
- Two thread designs are available: a coarse (hi-lo) thread design for wood framing and a self-drilling thread design for 14 to 20 gauge metal stud thicknesses.
- The blue color offers better visual contrast when fastening panels.
- Conveniently packaged for small and medium size installations in a clear and durable plastic jar that includes a square bit. The jars feature twist-on lids with handles and can easily be repurposed or recycled.


INSTALLATION

- Use a minimum 4-amp or cordless screw gun capable of achieving 1500-2500 rpm.
- Bit compatibility: #2 square drive or Phillips #2 drive
- Apply screws 3/8" to 5/8" from edges of panels.
- Screw spacing is 8" o.c. for walls and floors and countertops, 6" o.c. for ceilings.
- Install screws with screw-heads flush with the panel surface. Do not countersink screws.
- Screws must be driven straight to assure optimal performance.


RECOMMENDED APPLICATIONS

Wood Framing	Floor/ Countertop	Wall	Ceiling	Underlayment/Backerboard Thickness
1-1/4" Durock Screw for Wood Framing	X	X	—	1/4", 3/8", 1/2" and 5/8"
1-5/8" Durock Screw for Wood Framing	—	X	X	1/2", 5/8"
Steel Framing	Floor/ Countertop	Wall	Ceiling	Backerboard Thickness
1-1/4" Durock Screw for Steel Framing	—	X	X	1/2"
1-5/8" Durock Screw for Steel Framing	—	X	X	5/8"

For Wood Framing For Steel Framing



Recex® Combo Drive

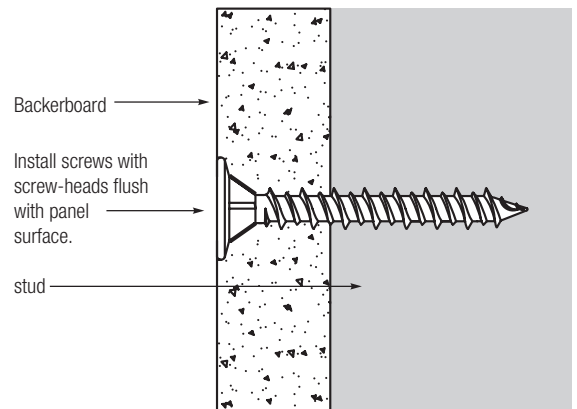

SIZES AND PACKAGING

		Unit Size	Units Per Carton
Wood Framing (White Lid Jar)	1-1/4" Durock Screw for Wood Framing	200 pcs/jar	18 jars/ctn
	1-1/4" Durock Screw for Wood Framing	600 pcs/jar	10 jars/ctn
	1-5/8" Durock Screw for Wood Framing	350 pcs/jar	10 jars/ctn
	1-5/8" Durock Screw for Wood Framing	4,000 pcs	4,000 pcs/ctn

SUBMITTAL APPROVALS

Job Name	
Contractor	Date

PRODUCT INFORMATION

See usg.com for the most up-to-date product information.

TRADEMARKS

The trademarks USG, DUROCK, IT'S YOUR WORLD, BUILD IT., the USG logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

The trademark RECEX is the trademark of Pan American Screw, Inc.

NOTE

Products described here may not be available in all geographic markets. Consult your USG Company sales office or representative for information.

NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

800 USG.4YOU
800 (874-4968)
usg.com

Manufactured by
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

CB400/rev. 5-22
© 2022 USG Corporation and/or
its affiliates. All rights reserved.
Printed in USA

