


USG CEILINGS® KITCHEN LAY-IN PANEL

CLIMAPLUS™ PERFORMANCE

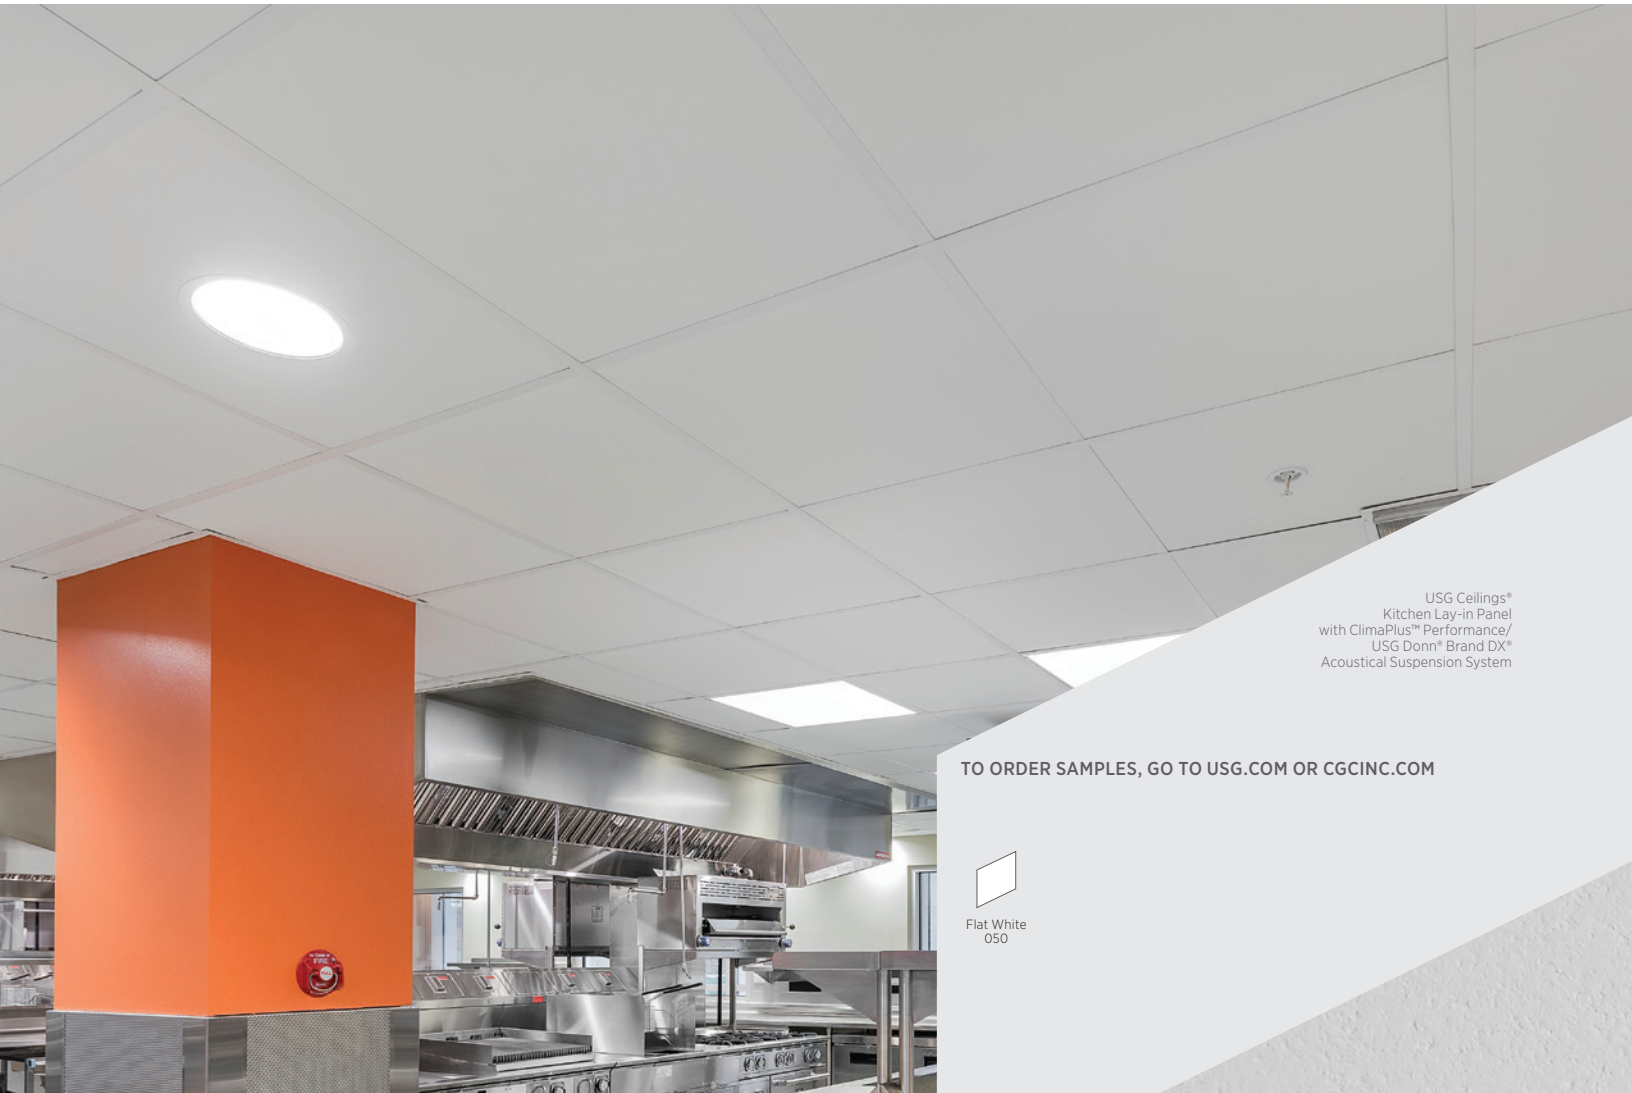

USG Ceilings®
Kitchen Lay-in Panel
with ClimaPlus™ Performance/
USG Donn® Brand DX®
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Lightweight alternative to vinyl-covered gypsum.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- High light reflectance.
- Washable, water repellent, scratch and soil resistant finish.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Kitchens and food preparation areas
- Restrooms and utility areas
- Locker rooms

SUBSTRATE

- Wet-formed mineral fiber

Smooth-Textured Panel

USG CEILING[®] KITCHEN LAY-IN PANEL

CLIMAPLUS[™] PERFORMANCE

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS:
 ULCOM/GG
 UL2818

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection

UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC ⁴	CAC Min.	LR ³	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
SQ 	2'x2'x5/8"	Class A	3210	-	35	0.90	White			24%	\$
	2'x4'x5/8"	Class A	3410	-	35	0.90	White			24%	\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). Certificates of Compliance for Low VOC Emissions are available on usg.com and at spot.ul.com.

ClimaPlus[™] Warranty Performance⁵

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A USG DX [®]	B USG DXLA [™]	C USG ZXLA [™]

PHYSICAL DATA

Product literature
 Data sheet: SC3226

ASTM E1264 classification
 Type IX, Form 2, Pattern G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Weight
 0.60 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
 R-1.4

Maximum backloading
 See *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Maintenance
 Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Do not use this product in close proximity to grease ducts.
- LR values are shown as averages.
- USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications (SC2102)*.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC3226/rev. 2-23
 © 2023 USG Corporation and/or its affiliates. All rights reserved.
 Printed in USA

Manufactured by
 United States Gypsum Company
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CE, CLEAN ROOM, CLIMAPLUS, DONN, DX, DXLA, FIRECODE, SHEETROCK, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

