USG Ceiling Solutions

USG LOGIX™

SUSPENSION SYSTEMS, ACCESSORIES, USG PANZ® METAL PANELS AND CONNECTOR PANELS

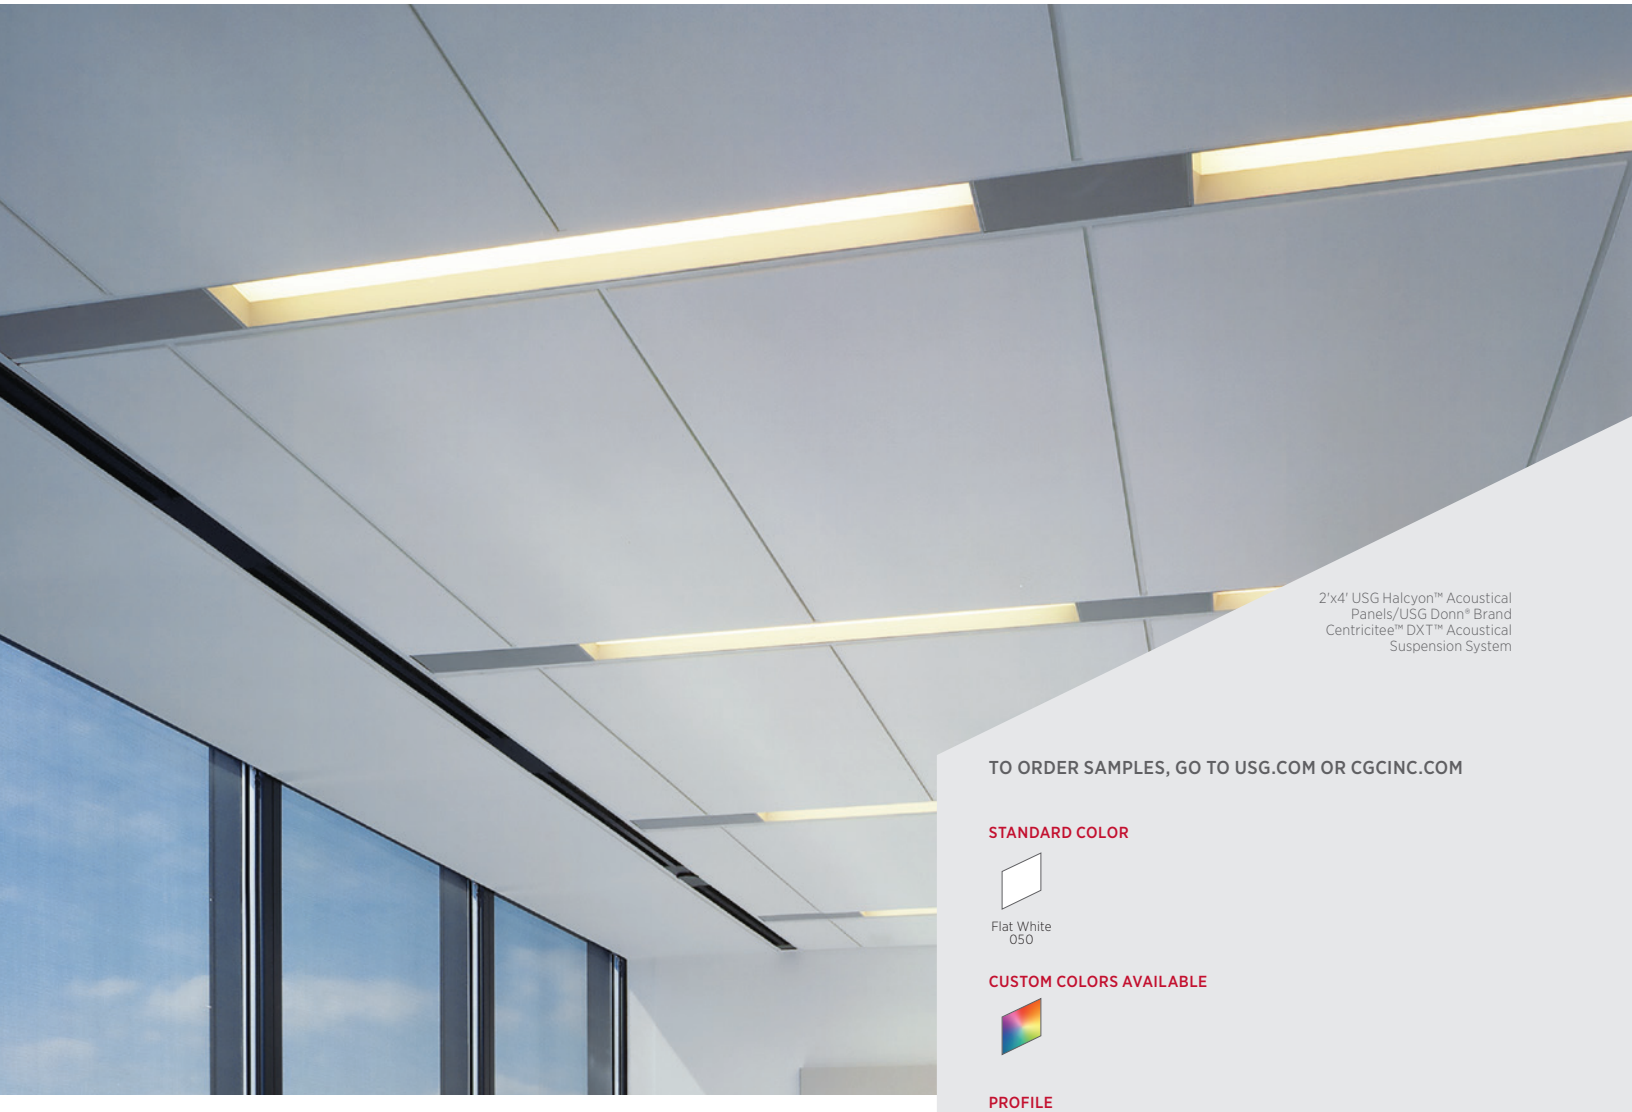

2'x4' USG Halcyon™ Acoustical Panels/USG Donn® Brand Centricitee™ DXT™ Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLOR

Flat White
050

CUSTOM COLORS AVAILABLE

PROFILE

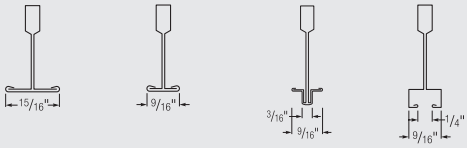

EDGE DETAIL

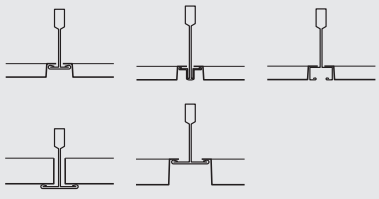

FEATURES AND BENEFITS

- Compatible with USG Logix™ Integrated System.
- Monolithic, structured ceiling visual using standard components.
- Designed to be compatible with a wide selection of 4", 6" and 12" utilities.
- Narrow-profile USG Donn® Brand Centricitee™ 9/16" DXT™ exposed grid system offers clean aesthetic.
- Concentrate utilities on narrow 4", 6" and 12" channels.
- Wide variety of connector panels offers many options, allowing the freedom to transform the utilities into dramatic design elements.
- The USG Logix™ yoke is compatible with all Imperial and Metric utility channel options and with a wide selection of 4", 6" and 12" Luminaires.

APPLICATIONS

- Interior Applications
- Wall to Wall Ceilings
- Sloped Ceilings
- New Construction

USG CGC
IT'S YOUR WORLD. BUILD IT.™

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND DX® AND CENTRICITEE™ DXT™ SYSTEMS (IMPERIAL)

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

System meets or exceeds load compliance specifications per ASTM C635

HIGH RECYCLED CONTENT

USG DONN® BRAND DX® 15/16″ TEE SYSTEM

Main Tee



Cross Tee



USG DONN® BRAND CENTRICITEE™ DXT™ 9/16″ TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Description
Intermediate Duty	144″	1.64″	**DX24** **DX24SP101** **DX24SP104** **DX24SP106** **DX24SP110**	USG Donn® Brand DX® Main Tee with CT hole, 6″ o.c. USG Donn® Brand DX® Main Tee with 4″ paired CT holes, 48″ o.c. USG Donn® Brand DX® Main Tee with 4″ paired CT holes, for 46″, 48″, 46″ Large Panels USG Donn® Brand DX® Main Tee with 6″ paired CT holes, for 46″, 48″, 46″ Large Panels USG Donn® Brand DX® Main Tee with 4″ paired CT holes, for 72″ Large Panels
	120″	1.64″	**DX24SP102** **DX24SP109**	USG Donn® Brand DX® Main Tee with 4″ paired CT holes, 30″ o.c. USG Donn® Brand DX® Main Tee with 6″ paired CT holes, 60″ o.c.
	104″	1.64″	**DX24SP103**	USG Donn® Brand DX® Main Tee with 4″ paired CT holes, 52″ o.c.
	128″	1.64″	**DX24SP107**	USG Donn® Brand DX® Main Tee with 4″ paired CT holes, 64″ o.c.
	100″	1.64″	**DX24SP108**	USG Donn® Brand DX® Main Tee with 4″ paired CT holes, 100″ o.c.
	96″	1.64″	**DX24SP105**	USG Donn® Brand DX® Main Tee with 6″ paired CT holes, 21″ o.c.
	21″	1-1/2″	**DX2116**	21″ USG Donn® Brand DX® Cross Tee
	24″	1-1/2″	**DX216**	24″ USG Donn® Brand DX® Cross Tee
	22″	1-1/2″	**DX2216**	22″ USG Donn® Brand DX® Cross Tee
	28″	1-1/2″	**DX2816**	28″ USG Donn® Brand DX® Cross Tee
	30″	1-1/2″	**DX3016**	30″ USG Donn® Brand DX® Cross Tee
	48″	1-1/2″	**DX422**	48″ USG Donn® Brand DX® Cross Tee
	44″	1-1/2″	**DX4416**	44″ USG Donn® Brand DX® Cross Tee
	60″	1-1/2″	**DXL524**	60″ USG Donn® Brand DX® Cross Tee
	56″	1-1/2″	**DX5616**	56″ USG Donn® Brand DX® Cross Tee
	72″	1-1/2″	**DX624**	72″ USG Donn® Brand DX® Cross Tee
	96″	1-1/2″	**DX824**	96″ USG Donn® Brand DX® Cross Tee
Intermediate Duty	144″	1-1/2″	**DXT24** **DXT24SP101** **DXT24SP104** **DXT24SP106** **DXT24SP110**	USG Donn® Brand Centricitee™ DXT™ Main Tee with CT hole, 6″ o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, 48″ o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, for 46″, 48″, 46″ Large Panels USG Donn® Brand Centricitee™ DXT™ Main Tee with 6″ paired CT holes, for 46″, 48″, 46″ Large Panels USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, for 72″ Large Panels
	120″	1-1/2″	**DXT24SP102** **DXT24SP109**	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, 30″ o.c. USG Donn® Brand Centricitee™ DXT™ Main Tee with 6″ paired CT holes, 60″ o.c.
	104″	1-1/2″	**DXT24SP103**	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, 52″ o.c.
	128″	1-1/2″	**DXT24SP107**	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, 64″ o.c.
	100″	1-1/2″	**DXT24SP108**	USG Donn® Brand Centricitee™ DXT™ Main Tee with 4″ paired CT holes, 100″ o.c.
	96″	1-1/2″	**DXT24SP105**	USG Donn® Brand Centricitee™ DXT™ Main Tee with 6″ paired CT holes, 21″ o.c.
	21″	1-1/2″	**DXT2122**	21″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	24″	1-1/2″	**DXT222** HRC	24″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	22″	1-1/2″	**DXT2222**	22″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	28″	1-1/2″	**DXT2822**	28″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	30″	1-1/2″	**DXT3022**	30″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	48″	1-1/2″	**DXT424** HRC	48″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	44″	1-1/2″	**DXT4422**	44″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	60″	1-1/2″	**DXT524**	60″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	56″	1-1/2″	**DXT5622**	56″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	72″	1-1/2″	**DXT624**	72″ USG Donn® Brand Centricitee™ DXT™ Cross Tee
	96″	1-1/2″	**DXT824**	96″ USG Donn® Brand Centricitee™ DXT™ Cross Tee

Low Emissions (VOC)
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

High Recycled Content
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND IDENTITEE® DXI™ (IMPERIAL) AND DX® (METRIC) SYSTEMS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

System meets or exceeds load compliance specifications per ASTM C635

HRC HIGH RECYCLED CONTENT

USG LOGIX™ SUSPENSION SYSTEMS - IMPERIAL

USG DONN® BRAND IDENTITEE® DXI™ 9/16" TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Description
Intermediate Duty	144"	1-13/16"	DXI24 HRC	USG Donn® Brand Identitee® DXI™ Main Tee with CT hole, 6" o.c.
			DXI24SP101	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 48" o.c.
			DXI24SP104	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, for 46", 48", 46" Large Panels
			DXI24SP106	USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, for 46", 48", 46" Large Panels
			DXI24SP110	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, for 72" Large Panels
	120"	1-13/16"	DXI24SP102	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 30" o.c.
			DXI24SP109	USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, 60" o.c.
	104"	1-13/16"	DXI24SP103	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 52" o.c.
	128"	1-13/16"	DXI24SP107	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 64" o.c.
	100"	1-13/16"	DXI24SP108	USG Donn® Brand Identitee® DXI™ Main Tee with 4" paired CT holes, 100" o.c.
	96"	1-13/16"	DXI24SP105	USG Donn® Brand Identitee® DXI™ Main Tee with 6" paired CT holes, 21" o.c.
	21"	1-13/16"	DXI2124 HRC	21" USG Donn® Brand Identitee® DXI™ Cross Tee
	22"	1-13/16"	DXI2224 HRC	22" USG Donn® Brand Identitee® DXI™ Cross Tee
	24"	1-13/16"	DXI224 HRC	24" USG Donn® Brand Identitee® DXI™ Cross Tee
	28"	1-13/16"	DXI2824 HRC	28" USG Donn® Brand Identitee® DXI™ Cross Tee
	30"	1-13/16"	DXI3024 HRC	30" USG Donn® Brand Identitee® DXI™ Cross Tee
	48"	1-13/16"	DXI424 HRC	48" USG Donn® Brand Identitee® DXI™ Cross Tee
	44"	1-13/16"	DXI4424 HRC	44" USG Donn® Brand Identitee® DXI™ Cross Tee
	60"	1-13/16"	DXI524	60" USG Donn® Brand Identitee® DXI™ Cross Tee
	56"	1-13/16"	DXI5624	56" USG Donn® Brand Identitee® DXI™ Cross Tee
	72"	1-13/16"	DXI624 HRC	72" USG Donn® Brand Identitee® DXI™ Cross Tee
	96"	1-13/16"	DXI824 HRC	96" USG Donn® Brand Identitee® DXI™ Cross Tee

USG DONN® BRAND FINELINE™ DXF™ 9/16"

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.			Description
	144"	1-13/16"	DXF144/24S-LGX	up to 50.4%	up to 33%	12' Main Tee Notched 24" o.c. one side/c.t. holes @12" o.c. for Logix Ceiling Systems
			DXF144/44-LGX			12' Main Tee Notched for 42" panel for Logix Ceiling Systems
	132"	1-13/16"	DXF132/30-LGX	up to 50.4%	up to 33%	11' Main Tee Notched for 30" panel for Logix Ceiling Systems
	120"	1-13/16"	DXF120/20S-LGX	up to 50.4%	up to 33%	10' Main Tee Notched 20" o.c. one side/c.t. holes @12" & 20" o.c. for Logix Ceiling Systems
			DXF120/30S-LGX			10' Main Tee Notched 30" o.c. one side/c.t. holes @12" & 30" o.c. for Logix Ceiling Systems
			DXF120/27-LGX			10' Main TeeNotched for 27"panel for Logix Ceiling Systems
			DXF120/54-LGX			10' Main Tee Notched for 54" panel for Logix Ceiling Systems
	108"	1-13/16"	DXF108/24-LGX	up to 50.4%	up to 33%	9' Main Tee Notched for 24" panel for Logix Ceiling Systems
			DXF108/48-LGX			9' Main Tee Notched for 48" panel for Logix Ceiling Systems
	102"	1-13/16"	DXF102/96-LGX	up to 50.4%	up to 33%	8-1/2' Main Tee Notched for 96" panel for Logix Ceiling Systems
			DXF102/48-LGX			8-1/2' Main Tee Notched for 48" panel for Logix Ceiling Systems
			DXF102/24-LGX			8-1/2' Main Tee Notched for 24" panel for Logix Ceiling Systems
	96"	1-13/16"	DXF96/30-LGX	up to 50.4%	up to 33%	8' Main Tee Notched for 30" panel for Logix Ceiling Systems
	78"	1-13/16"	DXF78/24-LGX	up to 50.4%	up to 33%	6-1/2' Main Tee Notched for 24" panel for Logix Ceiling Systems
			DXF78/72-LGX			6-1/2' Main Tee Notched for 72" panel for Logix Ceiling Systems
	27"	1-13/16"	DXF27-LGX	up to 50.4%	up to 33%	27" Cross Tee no Notch for Logix Ceiling Systems
	42"	1-13/16"	DXF42-LGX	up to 50.4%	up to 33%	42" Cross Tee no Notch for Logix Ceiling Systems
	54"	1-13/16"	DXF54-LGX	up to 50.4%	up to 33%	54" Cross Tee no Notch for Logix Ceiling Systems
			DXF54N-LGX			54" Cross Tee, Center Notched for Logix Ceiling Systems
	60"	1-13/16"	DXF529S-20-LGX	up to 50.4%	up to 33%	5' Cross Tee Notched 20" o.c. one side for Logix Basic Ceiling Systems

HRC **High Recycled Content**
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

USG CGC

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND CENTRICITEE™ AND IDENTITEE® DXI™ (METRIC) SYSTEMS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

System meets or exceeds load compliance specifications per ASTM C635

USG LOGIX™ SUSPENSION SYSTEMS – METRIC

USG DONN® BRAND DX® 24 MM TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Description
Intermediate Duty	**3600 mm**	**42 mm**	**MEDX3600**	USG Donn® Brand DX® Main Tee with CT hole, 150 mm o.c.
	2400 mm	**42 mm**	**MEDX24SP201** **MEDX24SP204**	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand DX® Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	**42 mm**	**MEDX24SP203**	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	**42 mm**	**MEDX24SP205** **MEDX24SP206**	USG Donn® Brand DX® Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand DX® Main Tee with 150 mm paired CT holes, 1500 mm o.c.
	1000 mm	**38 mm**	**MEDX1000**	1000 mm USG Donn® Brand DX® Cross Tee
	1050 mm	**38 mm**	**MEDX1050**	1050 mm USG Donn® Brand DX® Cross Tee
	1100 mm	**38 mm**	**MEDX1100**	1100 mm USG Donn® Brand DX® Cross Tee
	1200 mm	**38 mm**	**MEDX1200**	1200 mm USG Donn® Brand DX® Cross Tee
	1350 mm	**38 mm**	**MEDX1350**	1350 mm USG Donn® Brand DX® Cross Tee
	1400 mm	**38 mm**	**MEDX1400**	1400 mm USG Donn® Brand DX® Cross Tee
	1500 mm	**38 mm**	**MEDX1500**	1500 mm USG Donn® Brand DX® Cross Tee
	1800 mm	**38 mm**	**MEDX1800**	1800 mm USG Donn® Brand DX® Cross Tee
	1900 mm	**38 mm**	**MEDX1900**	1900 mm USG Donn® Brand DX® Cross Tee
	525 mm	**38 mm**	**MEDX525**	525 mm USG Donn® Brand DX® Cross Tee
	550 mm	**38 mm**	**MEDX550**	550 mm USG Donn® Brand DX® Cross Tee
	600 mm	**38 mm**	**MEDX600**	600 mm USG Donn® Brand DX® Cross Tee
	675 mm	**38 mm**	**MEDX675**	675 mm USG Donn® Brand DX® Cross Tee
	700 mm	**38 mm**	**MEDX700**	700 mm USG Donn® Brand DX® Cross Tee

USG DONN® BRAND CENTRICITEE™ DXT™ 15 MM TEE SYSTEM

Main Tee



Cross Tee



Intermediate Duty	**3600 mm**	**46 mm**	**MEDX3600**	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with CT hole, 150 mm o.c.
	2400 mm	**46 mm**	**MEDXT24SP201** **MEDXT24SP204**	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand Centricitee™ Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	**46 mm**	**MEDXT24SP203**	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	**46 mm**	**MEDXT24SP205** **MEDXT24SP206**	up to 40%	up to 47%	USG Donn® Brand Centricitee™ Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand Centricitee™ Main Tee with 150 mm paired CT holes, 1500 mm o.c.
	1000 mm	**38 mm**	**MEDXT1000**	up to 26%	up to 33%	1000 mm USG Donn® Brand Centricitee™ Cross Tee
	1050 mm	**38 mm**	**MEDXT1050**	up to 26%	up to 33%	1050 mm USG Donn® Brand Centricitee™ Cross Tee
	1100 mm	**38 mm**	**MEDXT1100**	up to 26%	up to 33%	1100 mm USG Donn® Brand Centricitee™ Cross Tee
	1200 mm	**38 mm**	**MEDXT1200**	up to 26%	up to 33%	1200 mm USG Donn® Brand Centricitee™ Cross Tee
	1350 mm	**38 mm**	**MEDXT1350**	up to 26%	up to 33%	1350 mm USG Donn® Brand Centricitee™ Cross Tee
	1400 mm	**38 mm**	**MEDXT1400**	up to 26%	up to 33%	1400 mm USG Donn® Brand Centricitee™ Cross Tee
	1500 mm	**38 mm**	**MEDXT1500**	up to 26%	up to 33%	1500 mm USG Donn® Brand Centricitee™ Cross Tee
	1800 mm	**38 mm**	**MEDXT1800**	up to 26%	up to 33%	1800 mm USG Donn® Brand Centricitee™ Cross Tee
	1900 mm	**38 mm**	**MEDXT1900**	up to 26%	up to 33%	1900 mm USG Donn® Brand Centricitee™ Cross Tee
	525 mm	**38 mm**	**MEDXT525**	up to 26%	up to 33%	525 mm USG Donn® Brand Centricitee™ Cross Tee
	550 mm	**38 mm**	**MEDXT550**	up to 26%	up to 33%	550 mm USG Donn® Brand Centricitee™ Cross Tee
	600 mm	**38 mm**	**MEDXT600**	up to 26%	up to 33%	600 mm USG Donn® Brand Centricitee™ Cross Tee
	675 mm	**38 mm**	**MEDXT675**	up to 26%	up to 33%	675 mm USG Donn® Brand Centricitee™ Cross Tee
	700 mm	**38 mm**	**MEDXT700**	up to 26%	up to 33%	700 mm USG Donn® Brand Centricitee™ Cross Tee

USG LOGIX™ SUSPENSION SYSTEMS

USG DONN® BRAND CENTRICITEE™ AND IDENTITEE® DXI™ (METRIC) SYSTEMS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

System meets or exceeds load compliance specifications per ASTM C635

USG DONN® BRAND IDENTITEE® DXI™ 15 MM TEE SYSTEM

Main Tee



Cross Tee



ASTM Class	Length	Height	Item No.	Description
Intermediate Duty	**3600 mm**	**46 mm**	**MEDXI3600**	USG Donn® Brand Identitee® Main Tee with CT hole, 150 mm o.c.
	2400 mm	**46 mm**	**MEDXI24SP201** **MEDXI24SP204**	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1200 mm o.c. USG Donn® Brand Identitee® Main Tee with 150 mm paired CT holes, 1200 mm o.c.
	2600 mm	**46 mm**	**MEDXI24SP203**	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1300 mm o.c.
	3000 mm	**46 mm**	**MEDXI24SP205** **MEDXI24SP206**	USG Donn® Brand Identitee® Main Tee with 100 mm paired CT holes, 1500 mm o.c. USG Donn® Brand Identitee® Main Tee with 150 mm paired CT holes, 1500 mm o.c.
	1000 mm	**46 mm**	**MEDXI1000**	1000 mm USG Donn® Brand Identitee® Cross Tee
	1050 mm	**46 mm**	**MEDXI1050**	1050 mm USG Donn® Brand Identitee® Cross Tee
	1100 mm	**46 mm**	**MEDXI1100**	1100 mm USG Donn® Brand Identitee® Cross Tee
	1200 mm	**46 mm**	**MEDXI1200**	1200 mm USG Donn® Brand Identitee® Cross Tee
	1350 mm	**46 mm**	**MEDXI1350**	1350 mm USG Donn® Brand Identitee® Cross Tee
	1400 mm	**46 mm**	**MEDXI1400**	1400 mm USG Donn® Brand Identitee® Cross Tee
	1500 mm	**46 mm**	**MEDXI1500**	1500 mm USG Donn® Brand Identitee® Cross Tee
	1800 mm	**46 mm**	**MEDXI1800**	1800 mm USG Donn® Brand Identitee® Cross Tee
	1900 mm	**46 mm**	**MEDXI1900**	1900 mm USG Donn® Brand Identitee® Cross Tee
	525 mm	**46 mm**	**MEDXI1525**	525 mm USG Donn® Brand Identitee® Cross Tee
	550 mm	**46 mm**	**MEDXI1550**	550 mm USG Donn® Brand Identitee® Cross Tee
	600 mm	**46 mm**	**MEDXI1600**	600 mm USG Donn® Brand Identitee® Cross Tee
	675 mm	**46 mm**	**MEDXI1675**	675 mm USG Donn® Brand Identitee® Cross Tee
	700 mm	**46 mm**	**MEDXI1700**	700 mm USG Donn® Brand Identitee® Cross Tee

USG LOGIX™ INTEGRATED CEILING SYSTEMS

Yoke and Cross Members

Accessories	Item No.	Description	Color
	LGXUNVYK	USG Logix™ Universal Yoke 4", 6", 100 mm, 150 mm, HDG, 2-part yoke	N/A
	LGXDX4	USG Logix™ 4" channel cross member for USG Donn® Brand DX® systems	Flat White
	LGXDX6	USG Logix™ 6" channel cross member USG Donn® Brand DX® systems	Flat White
	LGXDX100	USG Logix™ 100 mm channel cross member USG Donn® Brand DX® systems	Flat White
	LGXDX150	USG Logix™ 150 mm channel cross member USG Donn® Brand DX® systems	Flat White
	LGXDXT4	USG Logix™ 4" channel cross member for USG Donn® Brand Centricitee™ DXT™ systems	Flat White

Accessories	Item No.	Description	Color
	LGXDXT6	USG Logix™ 6" channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXDXT100	USG Logix™ 100 mm channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXDXT150	USG Logix™ 150 mm channel cross member USG Donn® Brand Centricitee™ DXT™ systems	Flat White
	LGXDXI4C	USG Logix™ 4" channel cross member cover for USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT4	Flat White
	LGXDXI6C	USG Logix™ 6" channel cross member Cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT6	Flat White
	LGXDXI100C	USG Logix™ 100 mm channel cross member cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT100	Flat White
	LGXDXI150C	USG Logix™ 150 mm channel cross member cover USG Donn® Brand Identitee® DXI™ systems. Used with LGXDXT150	Flat White

USG LOGIX™ ACCESSORIES

IMPERIAL AND METRIC

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

CROSS MEMBER COVER

To Create a DXI Cross Tee	Use Channel Cross Member (Item No.)	Use Channel Cross Member Cover (Item No.)
USG Logix™ 4″	LGXDXT4	LGXDXI4C
USG Logix™ 6″	LGXDXT6	LGXDXI6C
USG Logix™ 100 mm	LGXDXT100	LGXDXI100C
USG Logix™ 150 mm	LGXDXT150	LGXDXI150C

Creating a Channel Cross Member for USG Logix™ DXI™ Systems

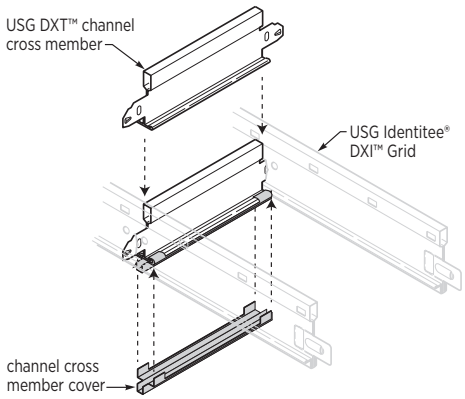

USG LOGIX™ INTEGRATED CEILING SYSTEMS STABILIZER BARS

Features

- Versatile engineered design provides support, security and accessibility.
- Factory-engineered solution provides system rigidity in large module applications and offers quick installation reducing field labor time.
- Available in six different dimensions to facilitate fast delivery.
- Durable galvanized steel construction.
- Factory-engineered capture tabs prevent panel detachment and lip out.
- Adjustable stab tabs secure bars onto the panel.
- Bulb tabs hook over the grid to prevent detachment, maintain lateral alignment and provide access.

Products





Item No.	Description	Profile
ASB24	24 in. Accessible Stabilizer Bar	2′ (24″) center to center notch spacing
ASB30	30 in. Accessible Stabilizer Bar	2′-6″ (30″) center to center notch spacing
ASB48	48 in. Accessible Stabilizer Bar	4 ft. (48″) center to center notch spacing
ASB600	600 mm Accessible Stabilizer Bar	600 mm center to center notch spacing
ASB900	900 mm Accessible Stabilizer Bar	900 mm center to center notch spacing
ASB1200	1200 mm Accessible Stabilizer Bar	1200 mm center to center notch spacing

Installation

Panels ≥ 60”

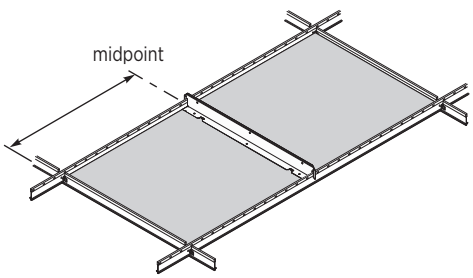

If opening is ≥ 60″ then one stabilizer bar is required at midpoint.

Panels ≥ 96”

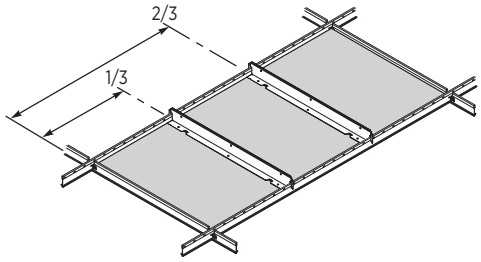

If opening is ≥ 96″ then two stabilizer bars are required at the 1/3 and 2/3 points.

USG PANZ® LOGIX™ METAL PANELS

IMPERIAL AND METRIC

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

USG PANZ®

Materials	Available Sizes	Panel Edge Profile
Aluminum	Field Panels 20″ x 54″, 20″ x 60″, 24″ x 24″, 24″ x 48″, 24″ x 72″, 24″ x 96″, 27″ x 30″, 30″ x 30″, 30″ x 54″, 30″ x 60″, 48″ x 48″	FL Edge
Aluminum	Channel Panels 4″ x 48″, 4″ x 60″, 4″ x 72″, 6″ x 12″, 6″ x 48″, 6″ x 60″, 6″ x 72″, 12″ x 48″, 12″ x 60″, 12″ x 72″	FL Edge, SQ Edge, SL Edge

Edge Details					Finish - Smooth, Unperforated
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge	USG DX® Grid, SQ Edge	USG DX® Grid, SL Edge	
					

USG PANZ®

Materials	Available Sizes	Panel Edge Profile
Aluminum	Field Panels 600 mm x 550 mm, 600 mm x 600 mm, 675 mm x 500 mm, 750 mm x 700 mm, 1050 mm x 600 mm, 1100 mm x 600 mm, 1800 mm x 600 mm, 1200 mm x 600 mm, 1350 mm x 750 mm, 1400 mm x 500 mm, 1400 mm x 750 mm, 1350 mm x 500 mm	FL Edge, SQ Edge, SL Edge
Aluminum	Channel Panels 1500 mm x 100 mm, 1200 mm x 100 mm, 1000 mm x 100 mm, 1200 mm x 150 mm, 1000 mm x 150 mm, 1800 mm x 300 mm	

Edge Details					Finish - Smooth, Unperforated
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge	USG DX® Grid, SQ Edge	USG DX® Grid, SL Edge	
					

USG PANZ® PERFORATED C116

Materials	Available Sizes	Panel Edge Profile
Aluminum	Channel Panels 6″ x 48″, 6″ x 60″	FL Edge

Edge Details				Finish - Perforated C116
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge		
				

USG PANZ® PERFORATED C116D

Materials	Available Sizes	Panel Edge Profile
Aluminum	Channel Panels 6″ x 48″, 6″ x 60″	FL Edge

Edge Details				Finish - Perforated C116D
USG DXT™ Grid, FL Edge	USG DXI™ Grid, FL Edge	USG DXF™ Grid, FL Edge		
				

USG LOGIX™ CONNECTOR PANELS

IMPERIAL

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

USG Logix™ Connector Panels	Item No.	Description[1]	Color
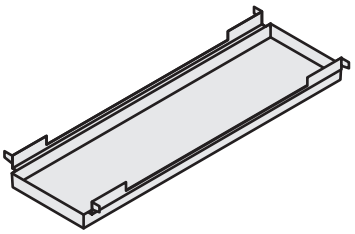	LCP412-S-FL	USG Logix™ 4″ x 12″ FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP412-S-FM	USG Logix™ 4″ x 12″ FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP412-C116-FL	USG Logix™ 4″ x 12″ FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
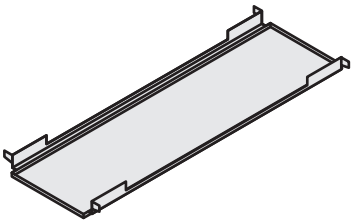	LCP412-C116-FM	USG Logix™ 4″ x 12″ FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP412-C116D-FL	USG Logix™ 4″ x 12″ FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP412-C116D-FM	USG Logix™ 4″ x 12″ FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
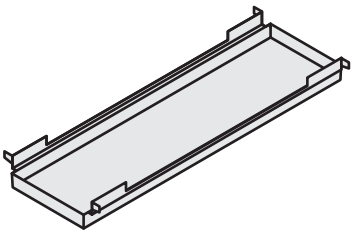	LCP424-S-FL	USG Logix™ 4″ x 24″ FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP424-S-FM	USG Logix™ 4″ x 24″ FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP424-C116-FL	USG Logix™ 4″ x 24″ FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
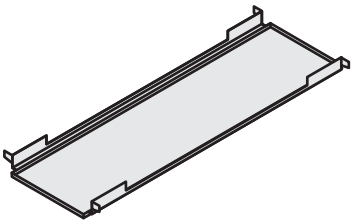	LCP424-C116-FM	USG Logix™ 4″ x 24″ FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP424-C116D-FL	USG Logix™ 4″ x 24″ FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP424-C116D-FM	USG Logix™ 4″ x 24″ FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
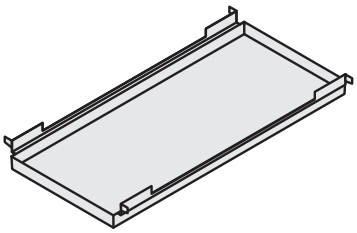	LCP612-S-FL	USG Logix™ 6″ x 12″ FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP612-S-FM	USG Logix™ 6″ x 12″ FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP612-C116-FL	USG Logix™ 6″ x 12″ FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
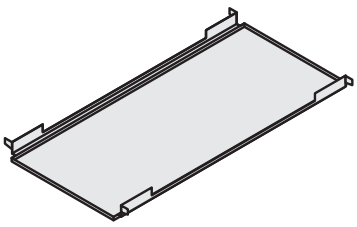	LCP612-C116-FM	USG Logix™ 6″ x 12″ FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP612-C116D-FL	USG Logix™ 6″ x 12″ FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP612-C116D-FM	USG Logix™ 6″ x 12″ FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

USG LOGIX™ CONNECTOR PANELS

METRIC

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

USG Logix™ Connector Panels	Item No.	Description[1]	Color
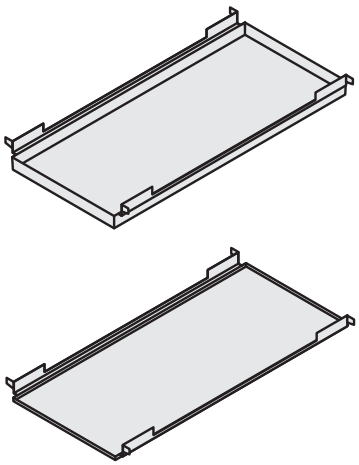	LCP624-S-FL	USG Logix™ 6″ x 24″ FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP624-S-FM	USG Logix™ 6″ x 24″ FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP624-C116-FL	USG Logix™ 6″ x 24″ FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP624-C116-FM	USG Logix™ 6″ x 24″ FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP624-C116D-FL	USG Logix™ 6″ x 24″ FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP624-C116D-FM	USG Logix™ 6″ x 24″ FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
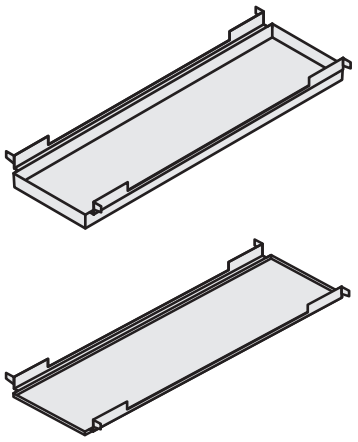	LCP100300-S-FL	USG Logix™ 100 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP100300-S-FM	USG Logix™ 100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP100300-C116-FL	USG Logix™ 100 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP100300-C116-FM	USG Logix™ 100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP100300-C116D-FL	USG Logix™ 100 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP100300-C116D-FM	USG Logix™ 100 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
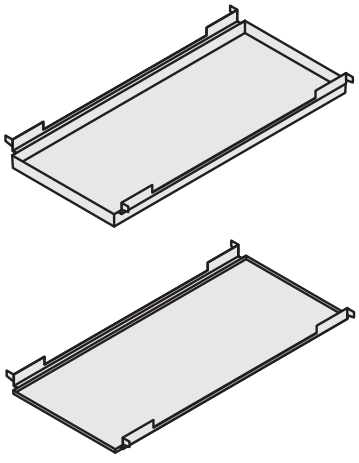	LCP100600-S-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP100600-S-FM	USG Logix™ 100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP100600-C116-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
	LCP100600-C116-FM	USG Logix™ 100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP100600-C116D-FL	USG Logix™ 100 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP100600-C116D-FM	USG Logix™ 100 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

USG Logix™ Connector Panels	Item No.	Description[1]	Color
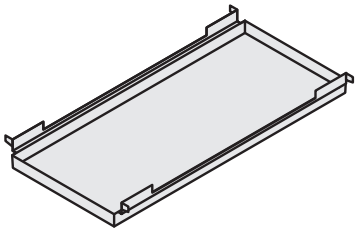	LCP150300-S-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP150300-S-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP150300-C116-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
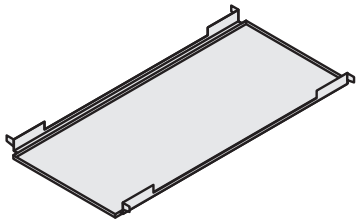	LCP150300-C116-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP150300-C116D-FL	USG Logix™ 150 mm x 300 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP150300-C116D-FM	USG Logix™ 150 mm x 300 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White
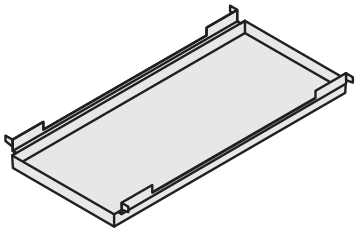	LCP150600-S-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, smooth, unperforated	Flat White
	LCP150600-S-FM	USG Logix™ 150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, smooth, unperforated	Flat White
	LCP150600-C116-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116	Flat White
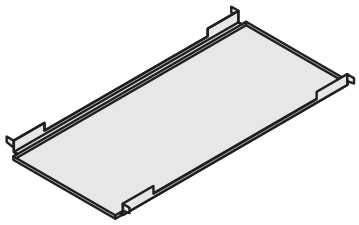	LCP150600-C116-FM	USG Logix™ 150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116	Flat White
	LCP150600-C116D-FL	USG Logix™ 150 mm x 600 mm FW Connector Panel with Fineline® (FL) edge, perforated C116D	Flat White
	LCP150600-C116D-FM	USG Logix™ 150 mm x 600 mm FW Connector Panel with Flush Mount (FM) edge, perforated C116D	Flat White

PHYSICAL DATA/ FOOTNOTES

Product literature
USG Logix™ systems guide: IS268
USG Logix™ architectural design guide: IS287
USG Logix™ critical system dimensions: IC609

See usg.com or cgcinc.com for the most up-to-date product information.

Product Evaluation Report
ESR-1222

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance
Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Material
Min. G30 hot-dipped galvanized steel.

Installation
Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

Notice
We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

Note
1. The connector panels are unique in size and function. They are designed to link various utilities in the utility channel such as luminaires and channel panels without cross tees. Refer to *USG Logix™ Integrated Ceiling Systems Critical System Dimensions* (IC609) for actual dimensions, details and layouts.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IS283/rev. 10-23
© 2023 USG Corporation and/or its affiliates. All rights reserved.
Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXI, DXT, FINELINE, HALCYON, IDENTITEE, LOGIX, PANZ, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.