


USG DONN® BRAND M7 OVERLAPPING WALL ANGLE




USG Donn® Brand
M7 Overlapping Wall Angle

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM


STANDARD COLORS

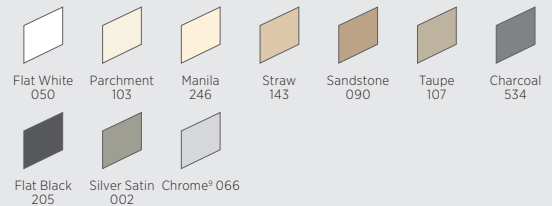

ADVANTAGE COLORS

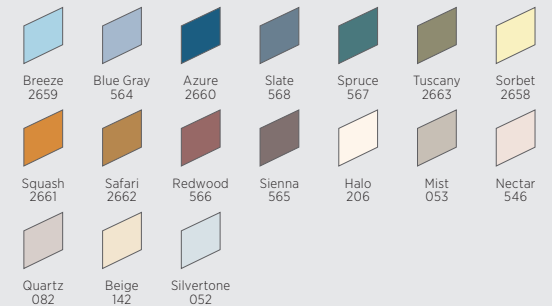

POWDER-COATED FINISH



FEATURES AND BENEFITS

- Proprietary overlap detail provides an “extra hand” for easier, more accurate installation.
- Ensures that trim faces are level.
- Eliminates an unsightly gap at butt joints.
- Installs faster than standard perimeter trim.

APPLICATIONS

- All interior general-use areas


USG DONN® BRAND M7 OVERLAPPING WALL ANGLE

ORDER SAMPLES/LITERATURE
 USG: samplit@usg.com
 phone: 866 528-7089 | usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

30 YEAR LIMITED SYSTEM WARRANTY
 • No Visible Sag
 • Mold/Mildew Protection


Wall Angle ²	Length	Item No.	Color
	12' 3600 mm	M7	Flat White Standard Advantage

MOLDING^{1,2}




PERFORMANCE COMPARISON

USG Donn® Brand M7 Overlapping Wall Angle

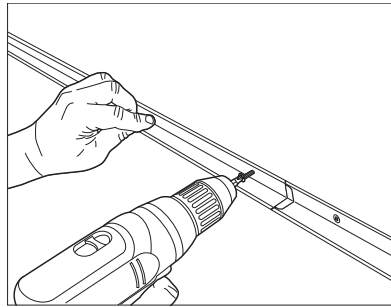

Overlap detail sits on adjacent trim, providing extra support for quicker, easier installation. The overlap ensures that trim faces are level, and it eliminates the unsightly gap created by traditional butt joints.

Traditional Wall Angle

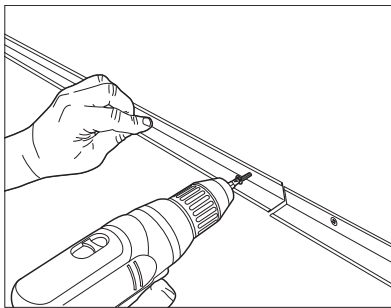

With no support between lengths of trim, traditional wall angle is more difficult to install. Butt-cut wall angle is also subject to misalignment of trim faces and gaps at joints.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
 Data sheet: AC3270

Material
 Hot-dipped galvanized steel body. Baked-on polyester paint.

Installation
 Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance
 For areas under ICC Jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

LA Research Report - RR 25764
 Refer to usg.com for most current version.

Notes
 1. For more information about moldings, see the Perimeter Interface selector.
 2. Panels must be field-cut to size and field-revealed, where necessary, at the perimeter.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3270/rev. 8-21
 © 2021 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, DONN, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

