


Dymonic 100  
 (Extends minimum 1" on each  
 side of fastener wrapped over  
 the top of screw, terminated at  
 flange to shed water)

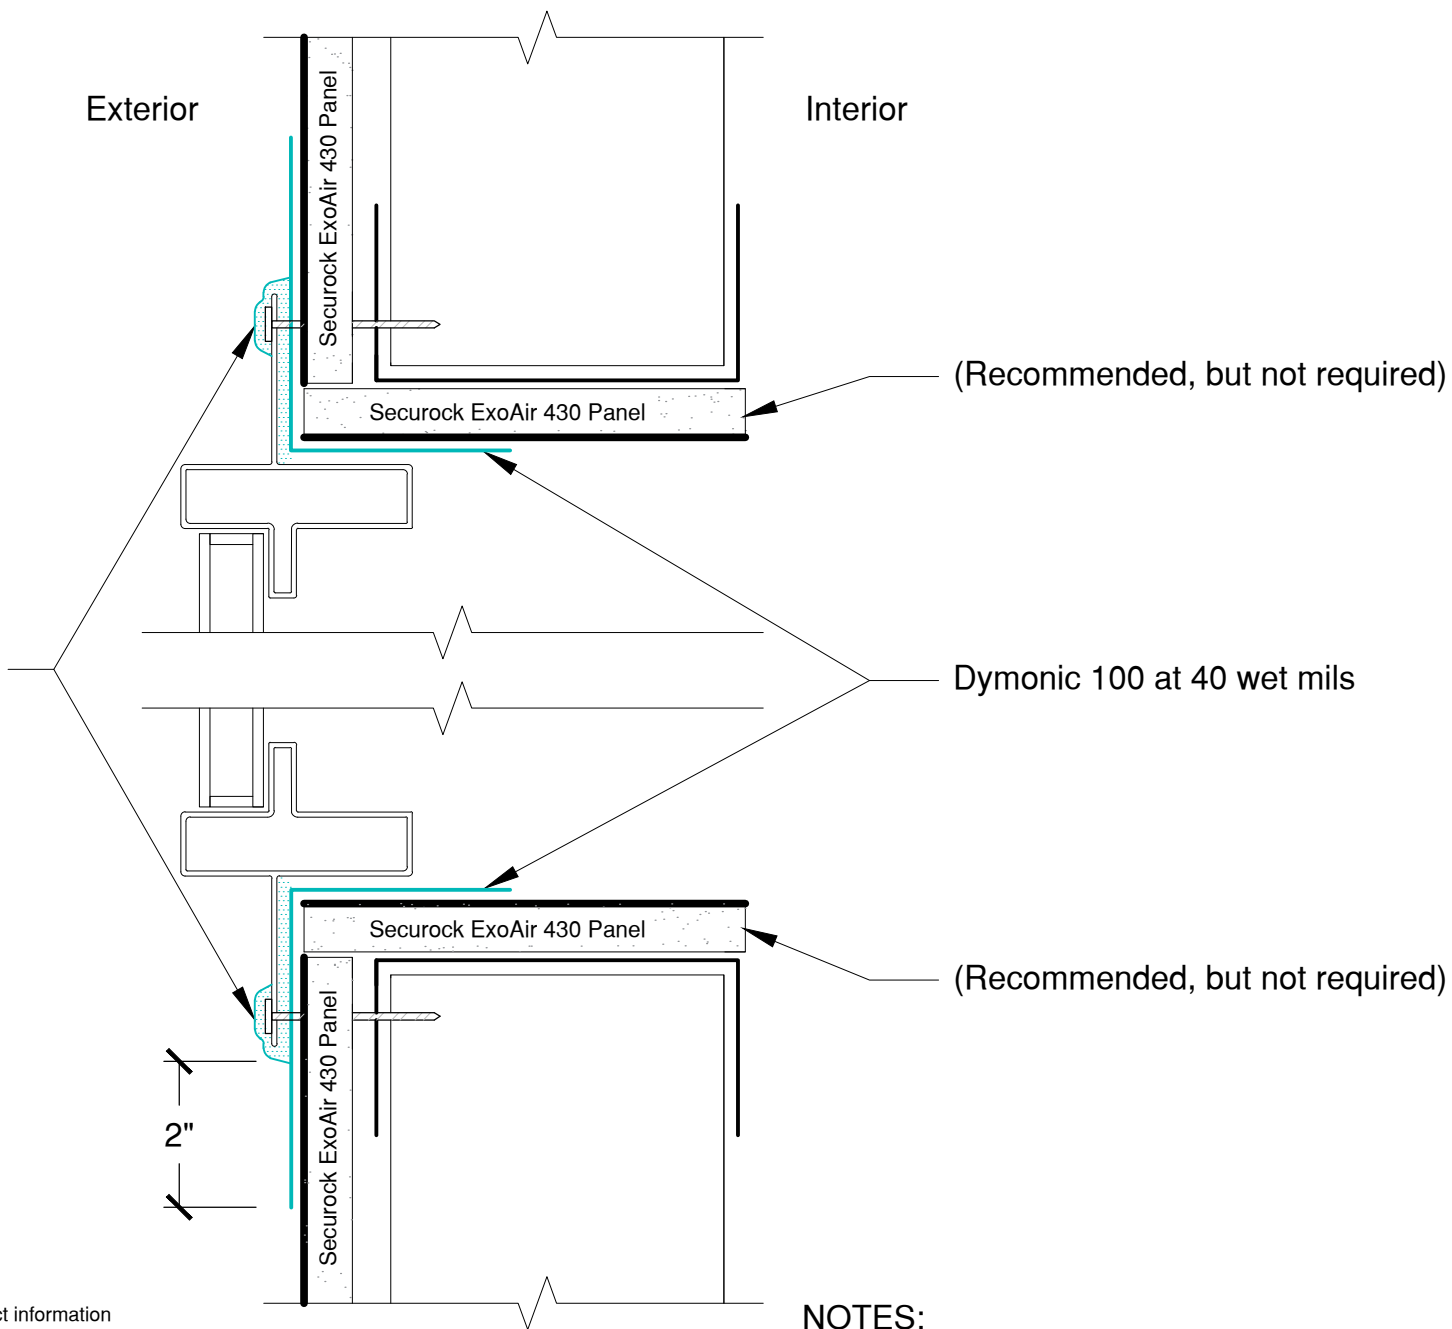

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*

**NOTES:**  
 - Flashing must be installed past thermal break



**United States Gypsum Company**  
 550 West Adams Street  
 Chicago, IL 60661  
  
 USG Technical & Customer Support:  
 800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
 3735 Green Road  
 Beachwood, OH 44122  
  
 Tremco Technical Support:  
 866.209.2404

**SECUROCK® ExoAir® 430 Panel**  
 Project:  
 Detail: Nail Flange - Dymonic 100 - Panel  
 Drawn by: KAB    Approved by: DM    Scale: NTS

File Name:  
**15843**  
 Date: 3/20/2017

Rev #  
**00**