


Dymonic 100, minimum 1/4" contact on surface of pipe and face of panel

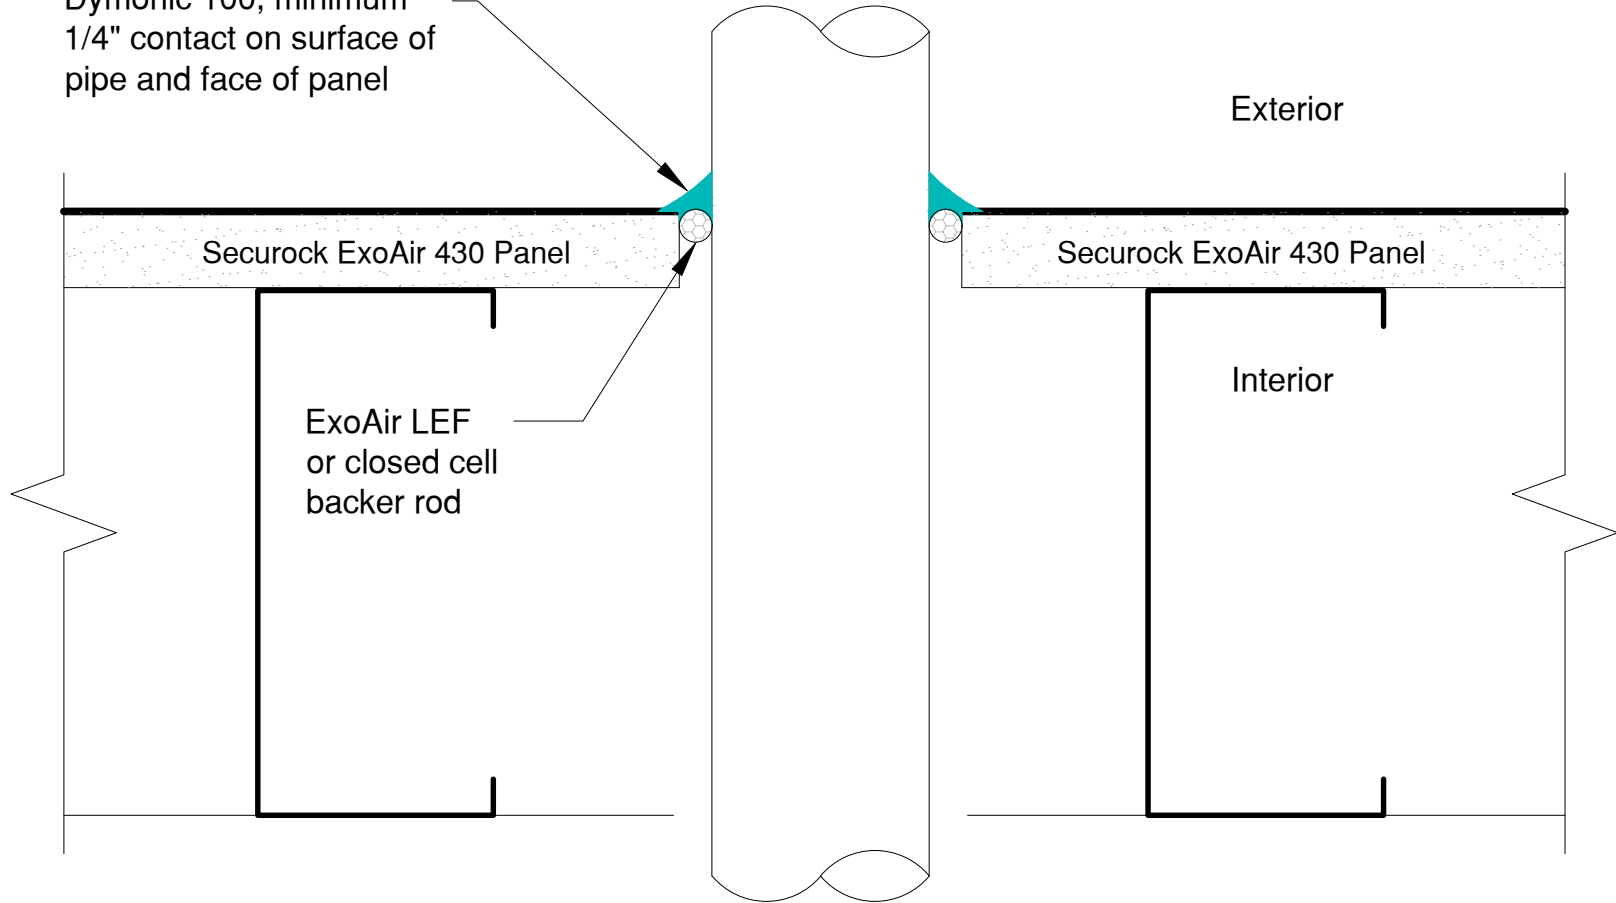

**NOTES:**

- Spectrem 1 is an alternate to Dymonic 100, but can not be used with an adhesively applied cladding
- No backing required at conditions with 0-1/4" of annular space

See [securockexoair.com](http://securockexoair.com) for the most up-to-date product information

*This detail is intended for conceptual purposes only. Must be reviewed by a project/design professional*

*The following trademarks used herein are owned by USG Corporation or its subsidiaries: SECUROCK, USG, USG in stylized letters. The following trademarks used herein are owned by Tremco Incorporated or its subsidiaries: Tremco, ExoAir, Spectrem, Dymonic, Proglaze, Vulkem.*



**PERFORMANCE BUILT IN**  
www.securockexoair.com

**United States Gypsum Company**  
550 West Adams Street  
Chicago, IL 60661

USG Technical & Customer Support:  
800.USG.4YOU (874-4968)

**Tremco Commercial Sealants & Waterproofing**  
3735 Green Road  
Beachwood, OH 44122

Tremco Technical Support:  
866.209.2404

SECUROCK® ExoAir® 430 Panel

Project:  
Detail: Non-Rated Wall Penetration

Drawn by: KAB

Approved by: DM

Scale: NTS

File Name:  
12887

Rev #  
00

Date: 2/7/2017