

USG
Building
Envelope
Solutions



USG SECUROCK® BRAND ULTRALIGHT GLASS-MAT SHEATHING

A LIGHTWEIGHT PANEL DESIGNED
TO GIVE YOUR PRODUCTIVITY A BOOST.

usg.com/ulglassmat

USG 
IT'S YOUR WORLD. BUILD IT.®


USG SECUROCK® BRAND ULTRALIGHT GLASS-MAT SHEATHING

USG has a long history of bringing new and innovative products to market. Our solutions are designed to be safe during manufacturing, delivery, handling and installation, and to perform well when installed and maintained using good construction practices. This commitment continues to be the cornerstone of our product development process with our USG Securock® Brand UltraLight Glass-Mat Sheathing, now the lightest 5/8 in. Type X glass-mat sheathing available.

A high-performing, lightweight sheathing that delivers warranted protection from the elements.

- The lightest 5/8 in. glass-mat sheathing available—up to 15% lighter than other glass-mat sheathings
- Coated fiberglass facer mat to maximize coverage of air/water barrier systems
- High resistance to mold and mildew and scores a 10 (highest) when tested in accordance with ASTM D3273*
- For use in most exterior systems when properly detailed by exterior finish manufacturer
- Meets or exceeds the requirements of ASTM C1177

5/8 IN. TYPE X SHEATHING - WEIGHT 4 FT. X 8 FT. PANEL

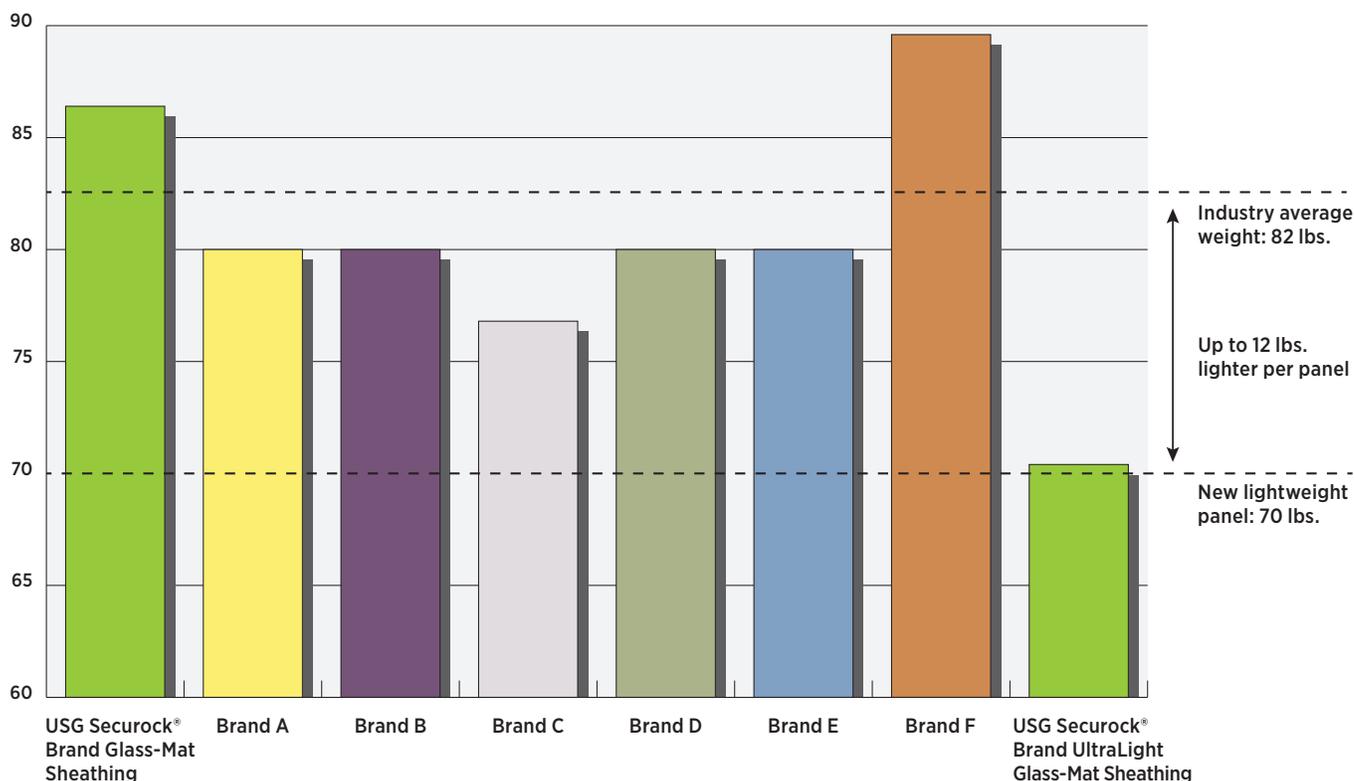

BASED ON 2016 PUBLISHED WEIGHTS BY MANUFACTURER

WB2847-USA-ENG/rev. 7-16
© 2016 USG Corporation and/or its affiliates.
All rights reserved.
Printed in U.S.A.

Manufactured by
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

800.USG.4YOU (874-4968)
usg.com
usgdesignstudio.com

PRODUCT INFORMATION
See usg.com for the most up-to-date product information.

TRADEMARKS
The trademarks USG, SECUROCK, IT'S YOUR WORLD. BUILD IT., the USG logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

NOTICE
We shall not be liable for incidental or consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instruction or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

SAFETY FIRST!
Follow good safety and industrial hygiene practices during handling and installation of all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read SDS and related literature on products before specification and/or installation.

***MOISTURE AND MOLD RESISTANCE**
USG Securock® Brand UltraLight Glass-Mat Sheathing resists moisture and mold and complies with ASTM C1177 for water resistance. In independent lab tests conducted at the time of manufacture per ASTM D3273, *Standard Test Method for Resistance to Growth of Mold on the Surface of Interior Coatings in an Environmental Chamber*, the panel score was 10.

This ASTM lab test may not accurately represent the mold performance of building materials in actual use. Given unsuitable project conditions during storage, installation or after completion, any building material can be overwhelmed by mold. To manage the growth of mold, the best and most cost-effective strategy is to protect building products from water exposure during storage and installation and after completion of the building. This can be accomplished by using good design and construction practices.