


SPECIAL-USE PANELS

USG Sheetrock® Brand
Lay-In Gypsum Ceiling Panel 3260

TO ORDER SAMPLES, GO TO USG.COM



USG Superpanel™

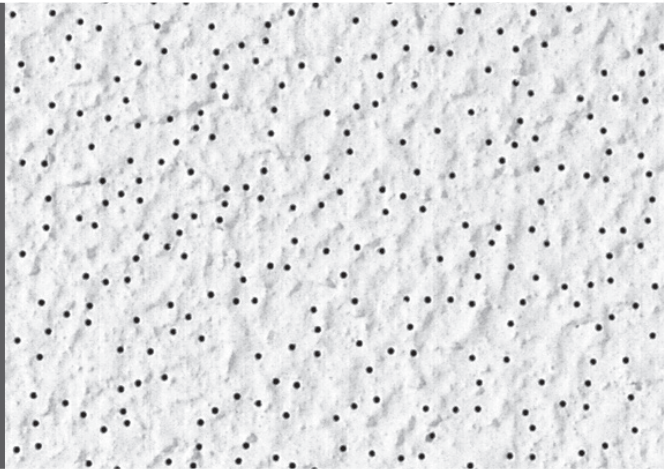

USG Sheetrock® Brand Lay-In Gypsum Ceiling Panel

FEATURES AND BENEFITS

- USG Superpanel™ features a granular texture and provides high resistance to humidity, abuse resistance and good sound control. Included in UL fire-rated assemblies of up to 2 hours.
- USG Sheetrock® Brand Lay-In Gypsum Panels meet the United States Department of Agriculture Food Safety and Inspection Service requirements for food processing areas.

PRODUCT SPECIFICATIONS

USG SUPERPANEL™

USG SHEETROCK® BRAND LAY-IN GYPSUM CEILING PANEL 1, 2, 3

Pattern	Item No.	Edge	Panel Size	Pcs./ Carton	Sq. Ft./ Carton	Ctns./ Pallet	Fire Rating	UL Sound Control		Technical Information						
								NRC	CAC	LR	R-Value	VOC	Mold, Mildew & Sag Resistance	Abuse Resistant	Recycled Content	USG Commercial Equivalent
	890	SQ 	2'x4'x5/8"	6	48	20		0.55	35	0.86	1.6	Low			50%	USG Rock Face™ 56380
	R3260	SQ 	2'x2'x1/2"	4	16	92		—	35	0.77	.45	Low			40%	USG Sheetrock® Brand Lay-In Panel 3260
	R3270	SQ 	2'x4'x1/2"	4	32	46		—	40	0.77	.45	Low			40%	USG Sheetrock® Brand Lay-In Panel 3270

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com

ClimaPlus™ Warranty Performance

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.



GREENGUARD Gold Certification offers stricter certification criteria, considers safety factors to account for sensitive individuals (such as children and the elderly), and ensures a product is acceptable for use in environments such as schools and healthcare facilities. It is referenced by both The Collaborative for High Performance Schools (CHPS) and the Leadership in Energy and Environmental Design (LEED) Building Rating System.

FOOTNOTES

ASTM E84 surface-burning characteristics

Class A
Flame Spread: 25 or less
Smoke Developed: 50 or less

Maintenance

USG Superpanel™: Can be cleaned easily with a soft brush or vacuum.

USG Sheetrock® Brand Lay-In Panel: Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Durability Tests:

ASTM D1037: Tested to 45 lbf. for a 1/4" depression by a Janka ball.

ASTM D5420: Tested to 3.5 in./lbf for impact.

Notes

1. Panels meet USDA/FSIS requirements for food processing areas.
2. This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See complete listing of all USG ceiling panels on biopreferred.gov website.



3. Available in full pallet quantities only.