

USG Ceilings Plus® Design Solutions

COLORTEX™ - TRIMETRIX™

ACOUSTIC PANEL SOLUTIONS



Architect: Gensler
Photo: © James John Jetel

To order samples, contact your local sales representative

Downward Accessible Installation


FEATURES AND BENEFITS

- Made from 100% recycled materials.
- Fully accessible plenum at every panel location.
- Third party integration of diffusers, lights, speakers, sprinklers, wifi, etc. (independently suspended).
- Design flexibility with varying profiles and layout options.
- Available in 1/2" (12mm) thick panels.
- Varied mounting arrangements are available to respond to any installation requirements or conditions.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Tenant Improvement
- Sloped Ceilings
- New Construction
- Downward Accessible

STANDARD COLORTEX™ FINISHES

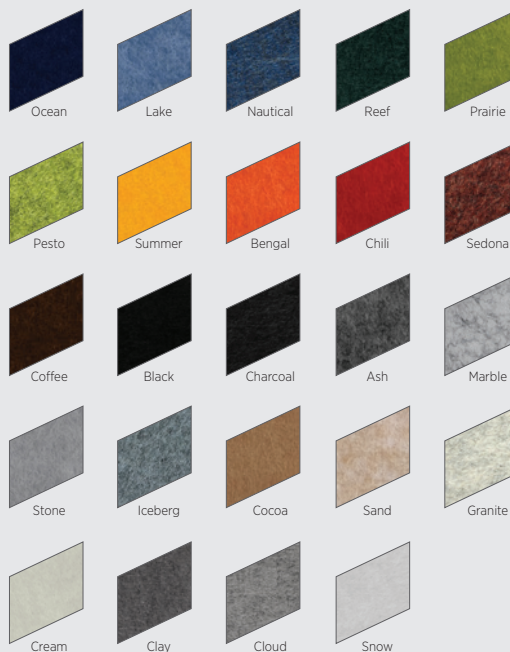




WOODGRAIN COLORTEX™ FINISHES



USG Ceilings Plus® Design Solutions
COLORTEX™ - TRIMETRIX™
ACOUSTIC PANEL SOLUTIONS

ORDER SAMPLES/LITERATURE
Contact your local sales rep.
TECHNICAL SERVICES
Contact your local sales rep.
FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
Contact your local sales rep.


Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

Application	Grid Options	Finish	Accessibility	Item No.	Thickness	Array-NRC¹	Perforation	Fire Rating	Recycled Content	Maintenance
										
Interior	N/A	24 Standard Colors & 3 Wood Grains, Custom Colors Available	Full Downward	N/A	1/2" Thick (12mm)	Up to 0.85	N/A	Class A, ASTM E84 CAN/ULC S102.2	60% Post-consumer/40% Pre-consumer recycled content (hardware excluded)	See architectural specification


PERFORMANCE
OPTIONS

REVEAL OPTIONS

OPEN REVEAL

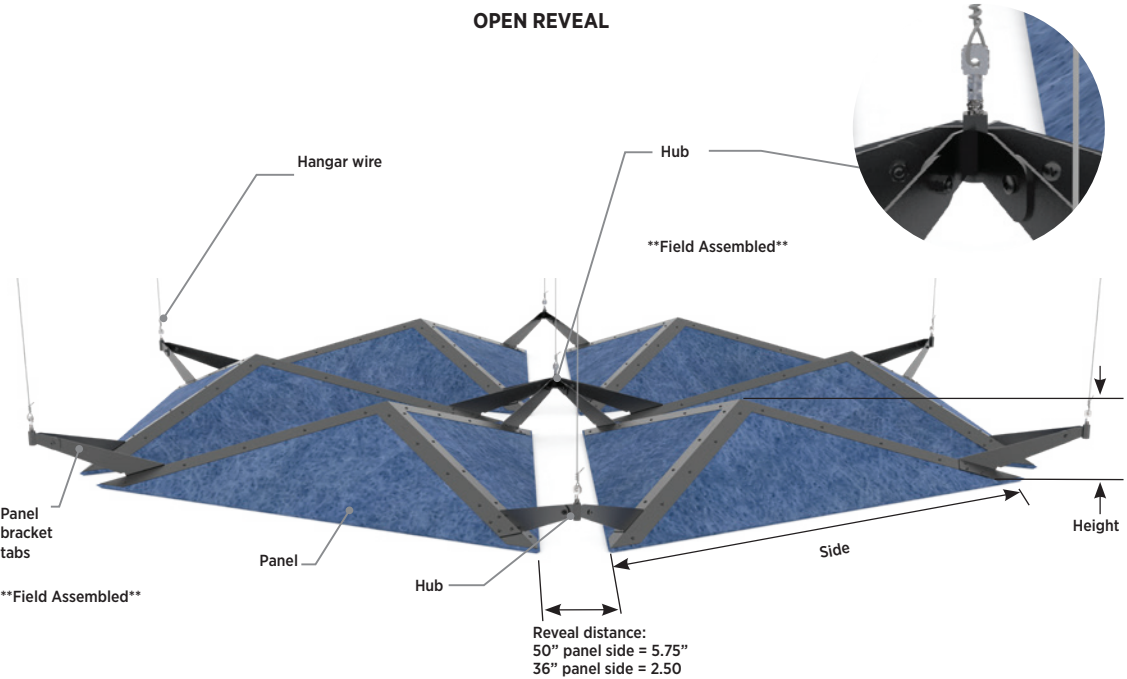

NO REVEAL

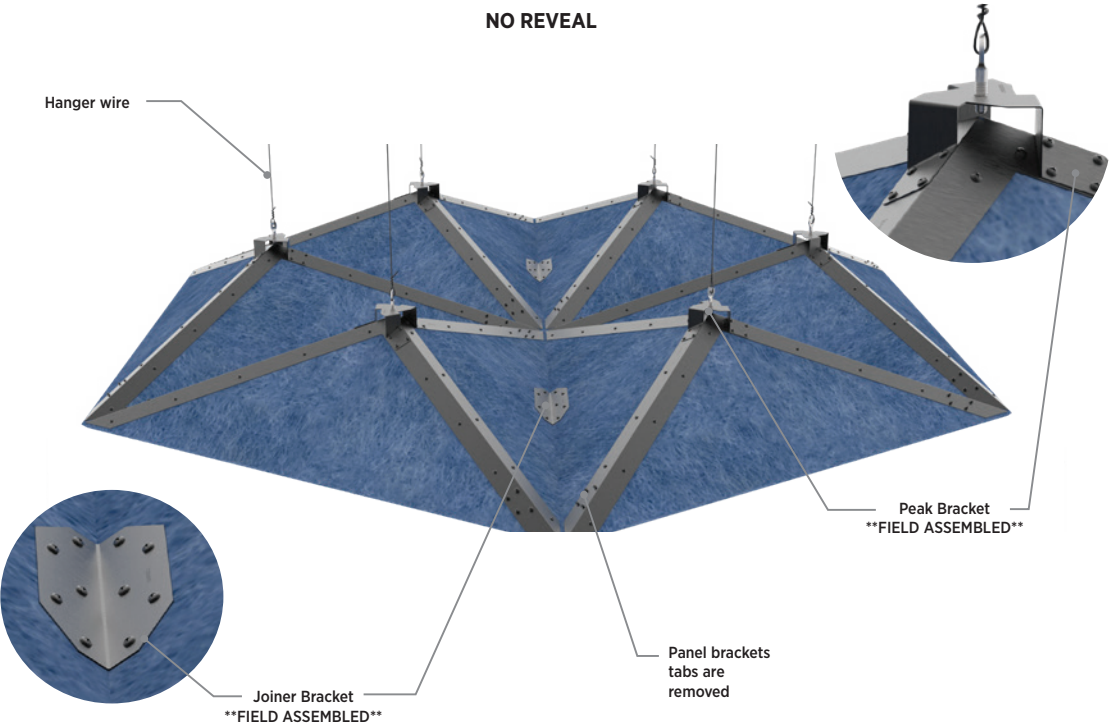

USG Ceilings Plus® Design Solutions
COLORTEX™ - TRIMETRIX™
 ACOUSTIC PANEL SOLUTIONS


ORDER SAMPLES/LITERATURE
 Contact your local sales rep.

**FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL**
 Contact your local sales rep.


TECHNICAL SERVICES
 Contact your local sales rep.

Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.


PANEL SIZES




CTPA5049
 Sides: 50"
 Height: 4.9"




CTPA5075
 Sides: 50"
 Height: 7.5"




CTPA50105
 Sides: 50"
 Height: 10.5"



CTPA3637
 Sides: 36"
 Height: 3.7"




CTPA3655
 Sides: 36"
 Height: 5.5"



CTPA3677
 Sides: 36"
 Height: 7.7"


Open Reveal panels come with the following hardware:

PANEL BRACKET TABS
 FIELD ASSEMBLED




No Reveal panels come with the following hardware:

PEAK BRACKET
 FIELD ASSEMBLED



COMPONENTS

OPEN REVEAL
 MOUNTING HARDWARE INCLUDED



HUB
CTHA9000-6
 SHOWN

CTHA9000-1




CTHA9000-2




CTHA9000-3




CTHA9000-4




CTHA9000-5



CTHA9000-6



CTHA9000-7



CTHA9000-8



CTHA9000-9




CTHA9000-10



CTHA9000-11



NO REVEAL
 MOUNTING HARDWARE INCLUDED



JOINER BRACKET
 FIELD ASSEMBLED

USG Ceilings Plus® Design Solutions
COLORTEX™ - TRIMETRIX™
ACOUSTIC PANEL SOLUTIONS

ORDER SAMPLES/LITERATURE
Contact your local sales rep.


TECHNICAL SERVICES
Contact your local sales rep.

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
Contact your local sales rep.


Declare. Declare® Labels on select finishes, see usg.ecomedes.com for more details and documentation.

LAYOUT EXAMPLES

OPEN REVEAL

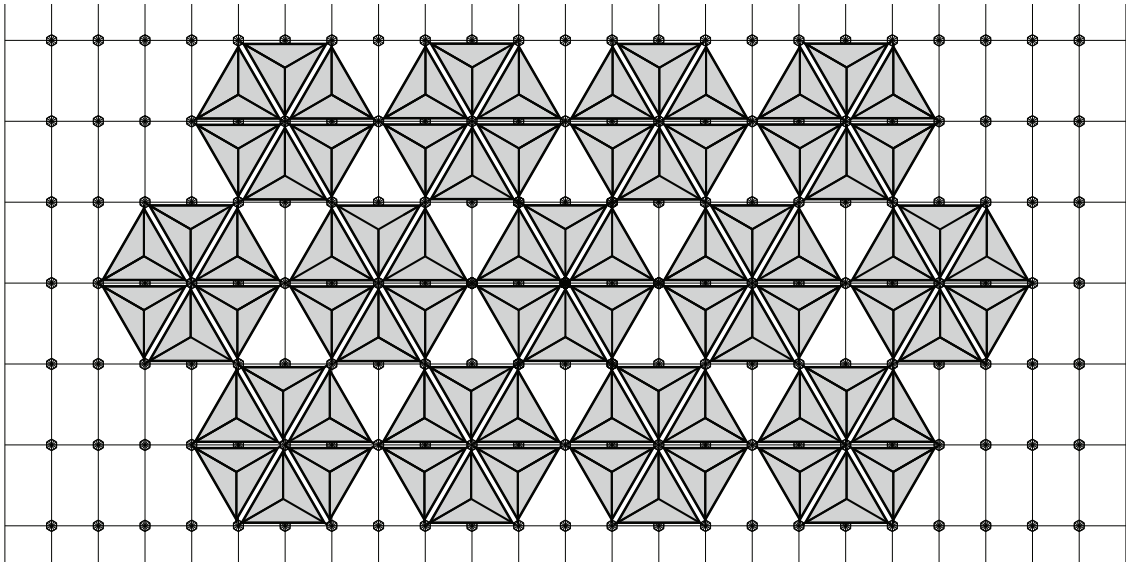

NO REVEAL

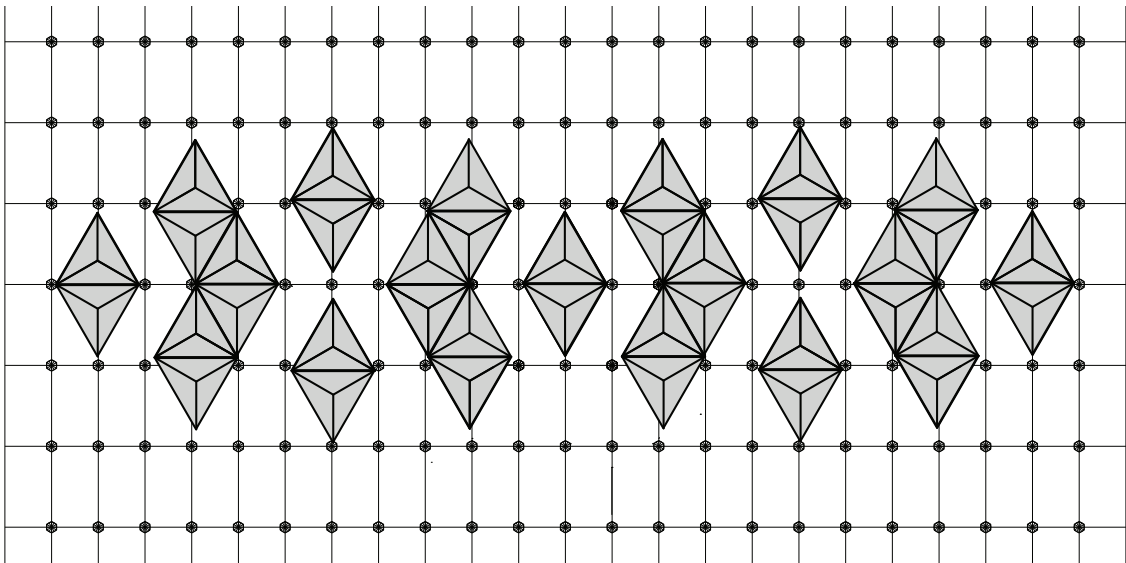

PHYSICAL DATA

Additional Documents and Resources
Architectural Specification
Installation Manual: IC307845
Cleaning Instructions: IC307845
Warranty: SC2102

Fire Classification
Surface-burning characteristics
ASTM E84: Class A
CAN/ULC S102.2 results as follows:
Flame Spread: 10
Smoke Developed: 215

Installation
Install per IBC, CISCA and USG installation instructions.

Acoustic Performance
1. Array-NRC is calculated per ASTM C423 and varies with Trimatrix size and configuration.

Integration
Colortex Trimatrix can accommodate a full range of Third-Party systems for any design intent. Air diffusers, speakers, sprinklers and other ceiling attached accessories can be independently attached to deck within our ceilings. CAD details are available online at www.ceilingplus.com.

Modification
Panels are easily modified in the field with standard tools. See our full list of CAD details.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC307305/rev. 7-24
© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, Ceilings Plus, CGC, Colortex, Trimatrix, the USG/CGC logo, The USG Ceilings Plus logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

