USG DUROCK™ Brand Shower System

Custom Shower Tray Order Form

Certified by IAPMO to UPC®, cUPC®, and IPC®

USG Order #

Sold To:

Name

Company Name/ USG Distributor | Email Address

Street Address/ State/Zip

Phone Number | Order Date | Job/P.O. Number

Title/ User Type | Requested Delivery Date

Ship To:

Company Name/ USG Distributor

Street Address/ State/Zip

Phone Number

Example—write-in dimensions for your custom tray.

☒ Rectangular



Shower trays with the center of the drain located less than 4 ft. from any wall will have a perimeter thickness of 1 in. The distance from the wall to the center of drain must be at least 10 inches.

Shower trays with the center of the drain located more than 4 ft. from any wall, will have a perimeter thickness of 1-1/4 in.

Download this order form at durockshowersystem.com

Sketch your Custom Shower Tray here. Provide all dimensions and placement of drain as shown in Rectangular example above right.

Select your shower tray style and size and write-in tray's dimensions on blank lines.

☐ Square



☐ Rectangular



☐ Neo Corner



☐ L-Shaped



☐ D-Shaped



All custom shower trays are manufactured from high density 3 lb. expanded polystyrene foam or EPS. The custom fit, pre-sloped tray replaces mortar beds, accepts unmodified thin-set mortar, and is available in virtually any size or shape. Shower tray disk is included. Other USG Durock Brand Shower System components sold separately. For large project quantity contact your local USG sales representative for pricing.

Disclaimer

USG Durock Brand Shower System Custom Shower Trays are **non-returnable** and **non-refundable.**

Please sign and date to indicate you understand and agree to this disclaimer.

Signature | **Date**

USG DUROCK™ Brand
Shower System

IMPORTANT!
Items on this page are **ALL** sold separately. Use this checklist to your advantage, verifying you have everything you need.

Components Check List

☐ **Waterproofing Membrane**
150 sq. ft., 3 x 50 ft. (13.9 m^2, 91 cm x 15 m)

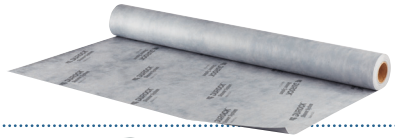

☐ **Waterproofing Membrane Band**
21 sq. ft., 5 in. x 50 ft. (1.9 m^2, 12.7 cm x 15 m)

☐ **Curb**
48 x 5 x 4-1/2 in. (1.2 m x 12.7 cm x 11.4 cm)



☐ **Preformed Corners**
Outside / Inside



☐ **Drain Assembly**
for 2 or 3 in. (5 or 7.6 cm) outlet
USG Durock™ Brand Shower System Installation Guide included in Drain Assembly box.



☐ **Pipe Seal**
3/4 in. (1.9 cm)



☐ **Mixing Valve Seal**
4-1/2 in. (11.4 cm)



☐ **Grate Kits**
4 in. (10.2 cm) or
5 in. (12.7 cm)

☐ **USG Durock™ Brand Sealant**
10.1 FL. OZ. (298 ml)

USG Durock™ Brand UltraLight Foam Tile Backerboard

- ☐ 1/4 in. x 3 ft. x 5 ft. (6.3 mm x 914 mm x 1524 mm)
- ☐ 1/2 in. x 3 ft. x 5 ft. (12.7 mm x 914 mm x 1524 mm)
- ☐ 1/2 in. x 4 ft. x 8 ft. (12.7 mm x 1219 mm x 2438 mm)
- ☐ 5/8 in. x 3 ft. x 5 ft. (15.9 mm x 914 mm x 1524 mm)
- ☐ 1 in. x 25 in. x 8 ft. (25.4 mm x 609 mm x 2438 mm)
- ☐ 1-1/2 in. x 25 in. x 8 ft. (38.1 mm x 609 mm x 2438 mm)
- ☐ 2 in. x 25 in. x 8 ft. (50.8 mm x 609 mm x 2438 mm)

United States Gypsum Company
550 West Adams Street
Chicago, IL 60661
A Subsidiary of USG Corporation

CB665-USA-ENG/rev. 6-16
© 2016 USG Corporation and/or its affiliates.
All rights reserved.
Printed in U.S.A.

For Product Information and Literature
Visit durockshowersystem.com

The trademarks USG, DUROCK, the USG logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.