

USG GLACIER™ BASIC ACOUSTICAL PANELS

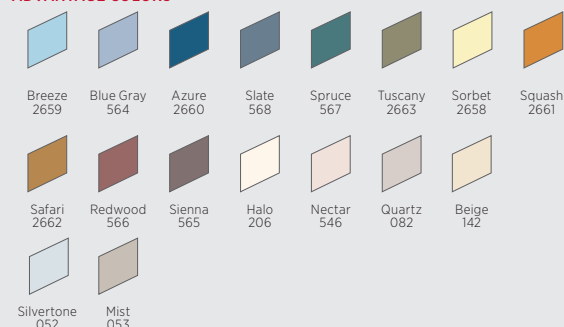
USG Glacier™ Basic Acoustical
Panels with USG Donn® Brand
Identitee® DXI™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS



ADVANTAGE COLORS



PREMIUM COLORS



Limited color options available.
See Ceiling Solutions Color
Program for details.

FEATURES AND BENEFITS

- Heavily textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- VOC emissions meet CA Specification 01350.
- USDA Certified Biobased Product.⁵
- Integral color masks nicks and scratches and enhances lifelong panel appearance.
- Optional Firecode® product designed to meet life-safety codes.
- USG Glacier™ Basic Acoustical Panels are part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- Food courts
- Hospitality
- Libraries
- Restaurants

SUBSTRATE

- Cast mineral fiber

USG GLACIER™ BASIC ACOUSTICAL PANELS



















ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)



USG GLACIER™ BASIC PANELS

UL Classified												
Edge	Panel Size	Fire Rating ²	Item No.	NRC	CAC Min.	LR ³	Color ⁴	Grid Options	VOC Emissions	Abuse Resistant	Recycled Content ¹	Panel Cost
SL 	2'x2'x3/4" Paper-Back		707				White Standard Advantage Premium					
	2'x2'x3/4" Paper-Back		715	0.65	35	0.70	White	B	Low		71%	
	2'x4'x3/4" Paper-Back	Class A	711	0.65	35	0.70	White	A	Low		69%	
FL 	2'x2'x3/4" Paper-Back	Class A	708	0.65	35	0.70	White Standard Advantage Premium	C, D, E, F	Low		69%	

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at spot.ul.com.







High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Firecode®

Abuse Resistant

GRID PROFILE OPTIONS

A USG DX®	B USG DXL™	C USG Centricitee™ DXT™	D USG Fineline® DXF™	E USG Fineline® 1/8 DXFF™	F USG Identitee® DXI™
					

PHYSICAL DATA

Product literature
Data sheet: SC1819

ASTM E1264 classification
ASTM E1264-22 Type III, Form 4, Pattern F
ASTM E1264-23 Type A, Form A1.4, Pattern F

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
AP, AP-1, AP-2, AP-3

Weight
1.47 lb./sq. ft. (Class A panels)
1.52 lb./sq. ft. (Firecode® panel)

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-1.7 (Class A)
R-1.3 (Firecode®)

Maximum backloading
See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Firecode® products are approved for use in fire-resistance rated UL designs, where the designs allow for the UL Type Designation.
- LR values are shown as averages.
- See Colors selector for more information.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
- Select custom color panels are available in limited sizes and edge profiles. Minimum order quantities apply. Please contact your local sales representative for availability, pricing, minimum order quantities and lead times.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1819/rev. 8-23
© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXF, DXFF, DXI, DXL, DXT, FINELINE, FIRECODE, GLACIER, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

