
USG HALCYON™ CANOPIES

CLIMAPLUS™ PERFORMANCE

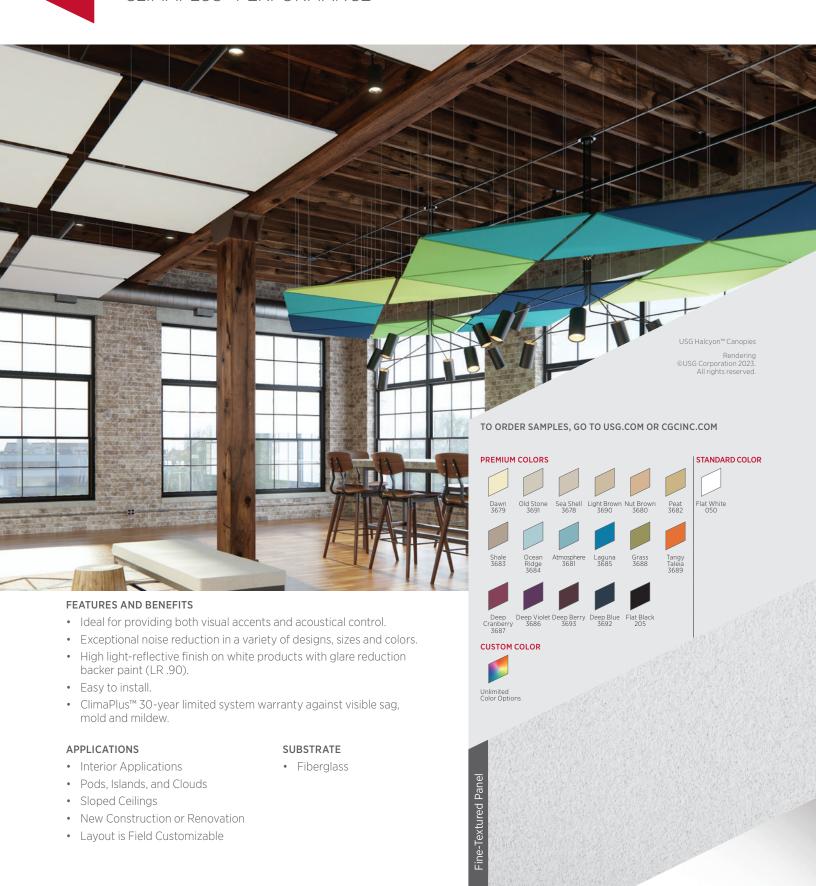

USG HALCYON CANOPIES

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE

USG: usg.com or samplit@usg.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)


FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL

usgdesignstudio.com cgcdesignstudio.com usg.ecomedes.com





SIZES AND **CONFIGURATIONS**

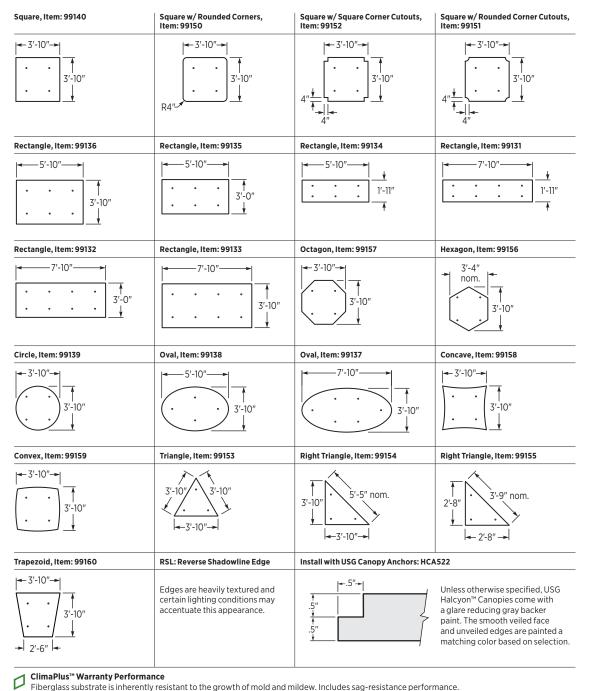

PHYSICAL DATA

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2797/rev. 7-24

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Fire Classification ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A Flame spread: 25 or less Smoke developed: 50 or less

ASTM E1264 Classification

ASTM E1264-22 Type XII, Form 2, Pattern E & G ASTM E1264-23 Type B, Form B2, Pattern E & G

Weight 0.47 lb./sq. ft. (1" panels)

Recycled Content

Thermal Resistance R-4.4 (1" panels) Seismic Applications

Refer to Seismic Technical Guide, Specialty Decorative Ceilings (SC2494) for more information on architectural components.

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

- USG Halcvon™ Canopies are flat, however with critical lighting may exhibit deflection no more than 1/8". Environmental conditions may adversely affect deflection.
- Care should be taken to minimize movement due to air flow within a space.
- USG Halcyon™ Canopy Anchors (HCA522) are included with each panel.
 Dots represent anchor points.
- Hanger wire (12 ga) or clear acrylic rod (max 1/8" diameter) to be used as horizontal spacer when appropriate.
- Panels must be ordered in multiples of two.
- Custom size, shape and color options are available. Consult your USG sales associate.
- Acoustical Performance: Up to 1.10 sabins per square foot (white). Array-NRC values vary with canopy size, spacing, and configuration.
- Do not backload.





Additional Documents and Resources

Online Tools usgdesignstudio.com, cgcdesignstudio.com

Data Sheet: SC2797

or usg.ecomedes.com