


USG LIBRETTO® GRIDLESS METAL SYSTEM

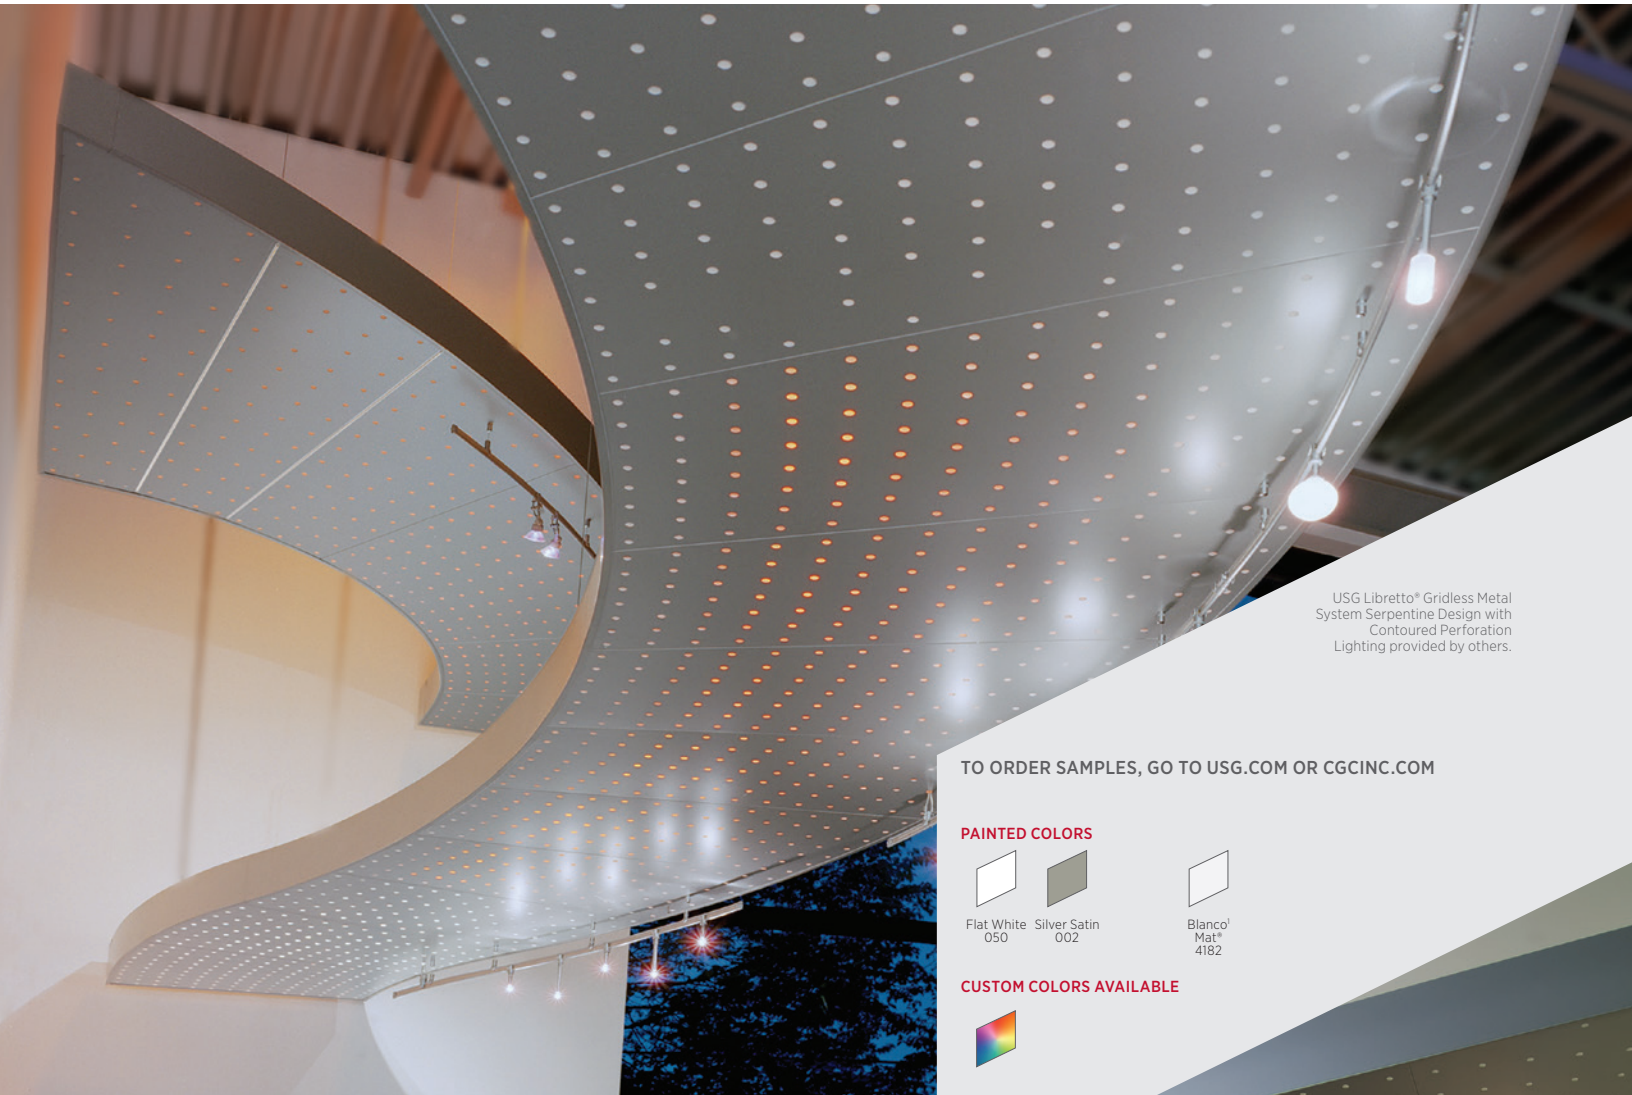

USG Libretto® Gridless Metal System Serpentine Design with Contoured Perforation Lighting provided by others.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED COLORS



Flat White
050



Silver Satin
002



Blanco!
Mat!
4182

CUSTOM COLORS AVAILABLE



FEATURES AND BENEFITS

- Collaborate with USG to create a custom design tailored to your space.
- Individually fabricated aluminum panels interconnect to form a continuous, uninterrupted plane.
- Carrier system is concealed and custom-fit, with choice of three perimeter profiles to achieve proper scale.
- You can request a contoured pattern that follows the shape of your USG Libretto® ceiling, specify a custom graphic or select a standard pattern for a square or rectangular ceiling.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Curved Ceilings
- New Construction or Renovation
- No Visible Grid
- Backlit Ceilings



USG LIBRETTO® GRIDLESS METAL SYSTEM

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com


PRODUCT INFORMATION

Materials	Perimeter Profile	Plenum Depth	Finishes
Panels: Aluminum Carrier system: Cold-rolled steel Edge profile: Cold-rolled steel	4", 6" or 8" in height.	Minimum 12", with 8" clearance above top edge of perimeter profile.	Panels available perforated with a contoured pattern that follows the shape of your ceiling, a custom graphic pattern, or a standard pattern for a square or rectangular ceiling. Optional black or white Acoustibond™ backer available. Smooth, unperforated metal also available.

DETAILS Design Concepts


Radial	Crescent	Serpentine	Four-Sided Polygon

Torus

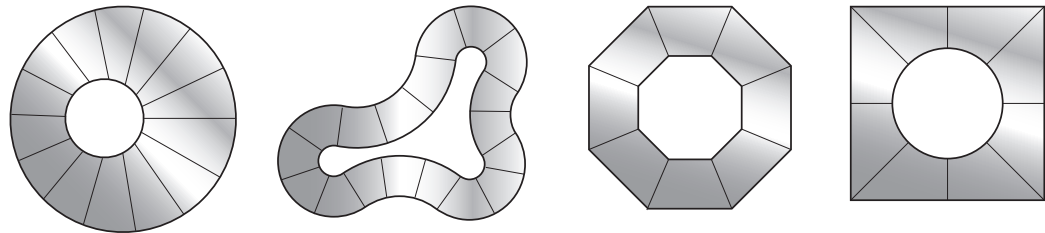

View from above

Assembly

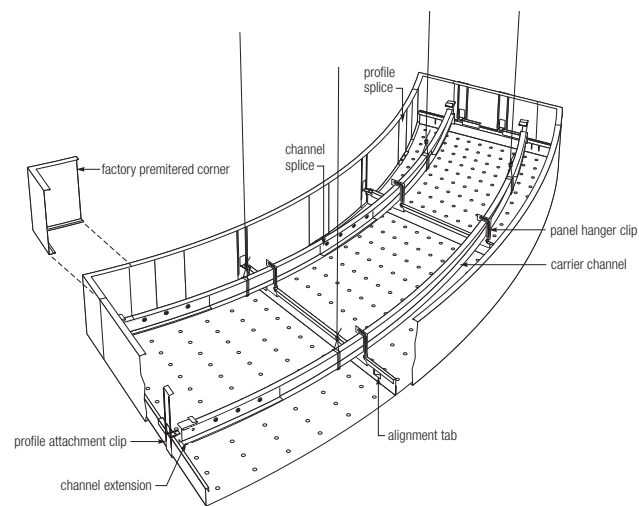

PHYSICAL DATA

Low Emissions (VOC)

CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

Product literature

System brochure: IC525
 Data sheet: IC526
 Warranty: SC2102
 Installation Guides: IC453
 Seismic Technical Guide: SC2494
 Perforation Guide: IC425
 Cleaning Instructions: IC518

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN/ULC S102 Surface-burning characteristics (with light diffusing backer)

Class A
 Flame Spread: 25 or less
 Smoke development: 50 or less

Limitation

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

Recycled content

USG Libretto® aluminum panels: ≤ 25% recycled content;
 USG Libretto® suspension and trim: 25% recycled content.

Notes

1. Libretto® panels available in Blanco Mat® 4182 up to 2' wide and up to 6' long.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC526/rev. 7-23

© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, LIBRETTO, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

