


USG PANZ® METAL PANELS

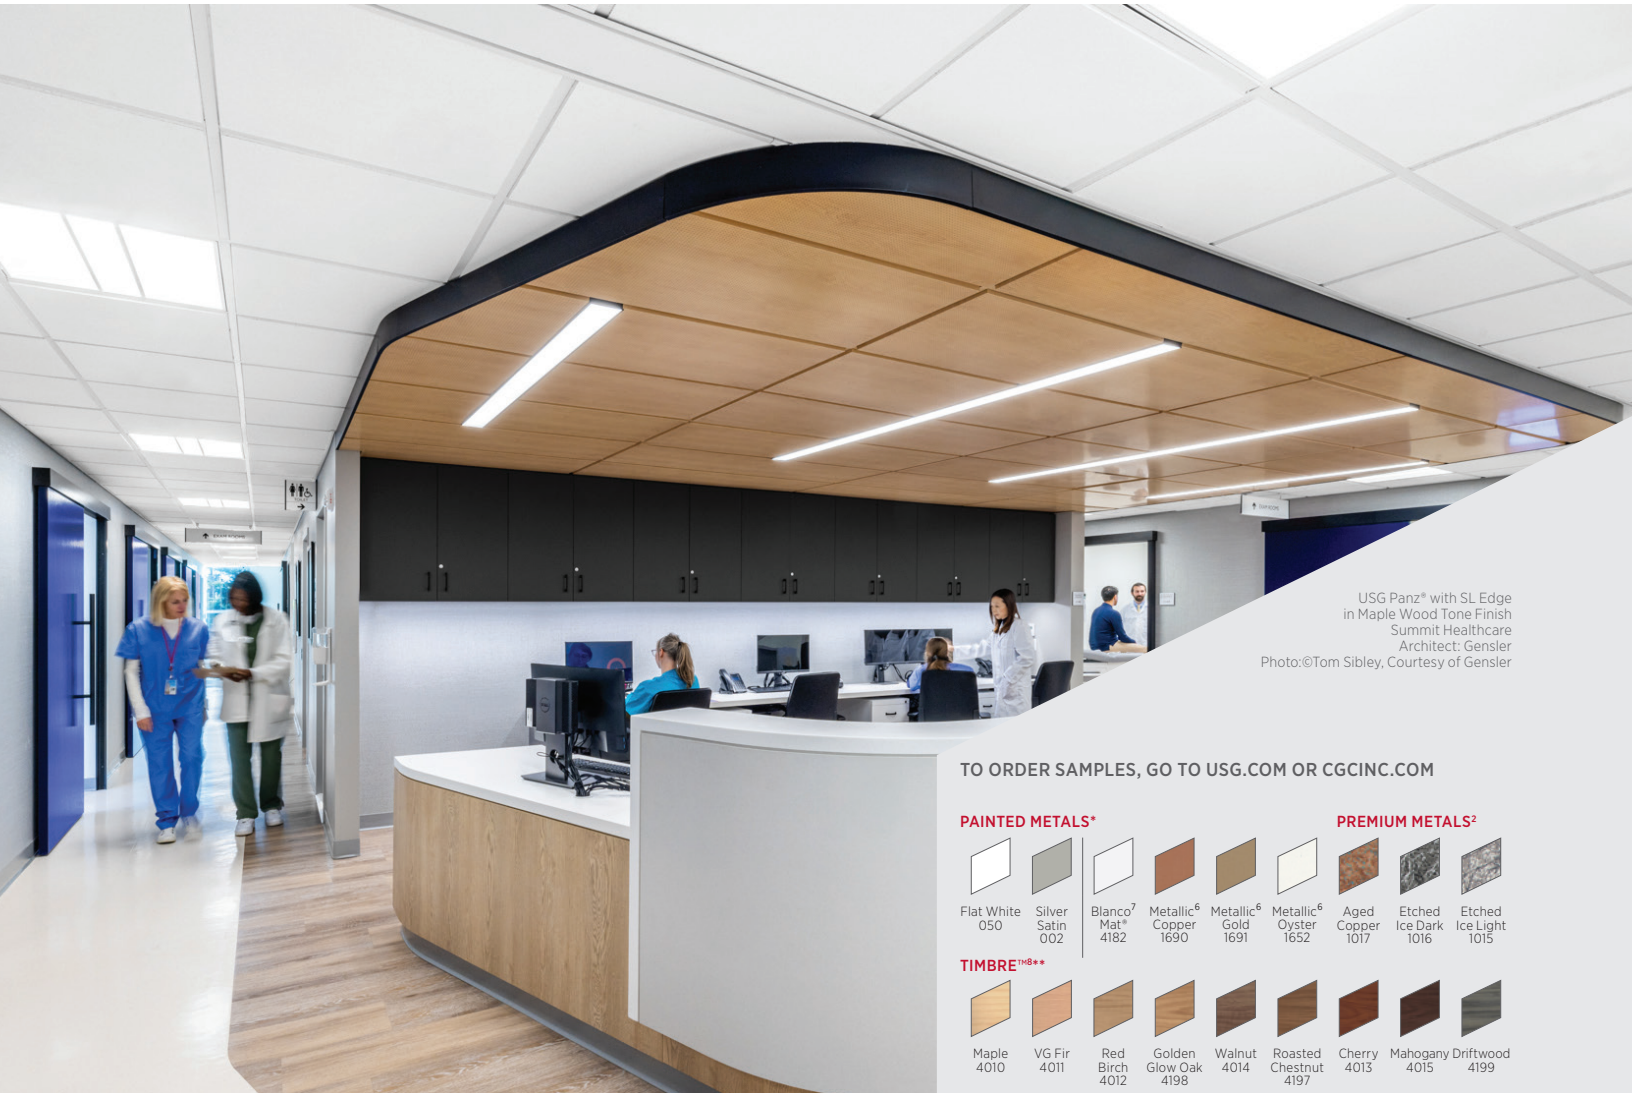

USG Panz® with SL Edge
in Maple Wood Tone Finish
Summit Healthcare
Architect: Gensler
Photo: ©Tom Sibley, Courtesy of Gensler

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS*



Flat White
050



Silver
Satin
002



Blanco⁷
Mat⁸
4182



Metallic⁶
Copper
1690



Metallic⁶
Gold
1691



Metallic⁶
Oyster
1652

PREMIUM METALS²



Aged
Copper
1017



Etched
Ice Dark
1016



Etched
Ice Light
1015

TIMBRE™^{8+*}



Maple
4010



VG Fir
4011



Red
Birch
4012



Golden
Glow Oak
4198



Walnut
4014



Roasted
Chestnut
4197



Cherry
4013



Mahogany
4015



Driftwood
4199

WOOD TONES** - TEXTURED



Beech
3810



Dark
Bamboo
3808



Light
Bamboo
3809



Dark
Cherry
3811



Light
Cherry
3812



Maple
3813



Red Oak
3814



Walnut
3815

ANODIZED METALS



Brushed
Aluminum
PIA12



Polished
Chrome
PM61



Polished
Brass
PM21



Satin
Chrome
PM614

DIAMONDFLEX™⁹



Louvered
Bright
White



Louvered
Bright
Silver



Sheer
Bright
White



Sheer
Bright
Silver

CUSTOM COLORS AVAILABLE



* Flat White and Silver Satin,
trim available to match.

** Grid and trim available in painted
coordinating colors.

FEATURES AND BENEFITS

- Simple lay-in design provides 100% access.
- Acoustibond™ sound backer produces 0.70 NRC without additional acoustical material.
- Available in numerous perforation patterns.
- Available with same edge details as USG acoustical panels.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall
- Sloped Ceilings
- New Construction or Renovation

USG PANZ® METAL PANELS

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplrt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com



PRODUCT INFORMATION

Materials	Available Sizes	Finishes
Panels: Aluminum	1' x 4', 1' x 5', 2' x 2', 2' x 4', 2' x 6', 2' x 8', 4' x 4', 20" x 60", 30" x 30", 30" x 60". Custom sizes available.	Painted, powder coated or anodized in a variety of optional perforation patterns. 2' x 2' panels available with perforation and/or embossing options.

ACOUSTICS⁴

Description	Optional Acoustical Material	Sound Rating - NRC	
		Perforation CD06305NB (A062)	Perforation CD11717 (A116)
Perforated panel	Acoustibond™ backer	0.60	0.70
Perforated panel	2", 0.75 lb. fiberglass in polybag	0.85	0.90

PANELS

Smooth Panel	Perforated Panel	Perforated Panel with Acoustibond™ ^{1,3} Backer

EDGE DETAILS

USG Square Edge with 15/16" USG DX® Suspension	USG Square Edge with 9/16" ² USG Centricitee™ DXT™ Suspension	USG Shadowline Edge with 15/16" USG DX® Suspension	USG Fineline® Edge with 9/16" USG Centricitee™ DXT™ Suspension	USG Fineline® Edge with 9/16" USG Fineline® DXF™ Suspension
USG Fineline® Edge with 9/16" USG Fineline® 1/8 DXFF™ Suspension	USG Flush Mount Edge with USG DX® Suspension ^{2,5} (FM 15)	USG Flush Mount Edge with USG DXT™ Suspension (FM 9)	USG Fineline® Edge with USG Identitee® DX1™ Suspension	

Low Emissions (VOC)
 CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

High Recycled Content
 USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

PHYSICAL DATA

Product literature
 System brochure: IC415
 Data sheet: IC314
 Perforation selection guide: IC425
 Warranty: SC2102
 Specification: IC675
 Care and Maintenance: IC518

Online tools
 usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN ULC S102 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Light reflectance
 Flat White: LR-0.80 (smooth panel).
 Blanco Mat® 4182: LR-0.93 (smooth panel).

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

Recycled content
 USG Panz® Metal Panels: up to 90% recycled content.

- Notes**
- Acoustibond™ standard backer not with DiamondFlex™ panels.
 - Only applicable for 2'x2' panels.
 - Refer to IC425 for additional NRC information based on perforation pattern.
 - If panel length is 60 inches then one stabilizer bar is required at midpoint.
 - If panel length is 96 inches then two stabilizer bars are required at the 1/3 and 2/3 points.
 - Cross tees 96 inches used in large modules shall have hanger wires installed minimum 4 ft. o.c.
 - Flush Mount Edge is for 2'x2' panels only. Flush Mount available with both DX® and DXT™ grid profiles.
 - Panz® panels available in metallics, with maximum 24" wide and 72" long.
 - Panz® panels available in Blanco Mat® 4182 up to 2' wide and up to 6' long.
 - Panz® panels available in Timbre™ up to 2' wide and up to 6' long.
 - DiamondFlex™ panels approximate percentage open area: Louvered 22%, and Sheer 52%.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC314/rev. 10-23
 © 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, DIAMONDFLEX, DONN, DX, DXF, DXFF, DXT, FINELINE, PANZ, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

