
USG PARALINE® PLUS LINEAR METAL SYSTEMS

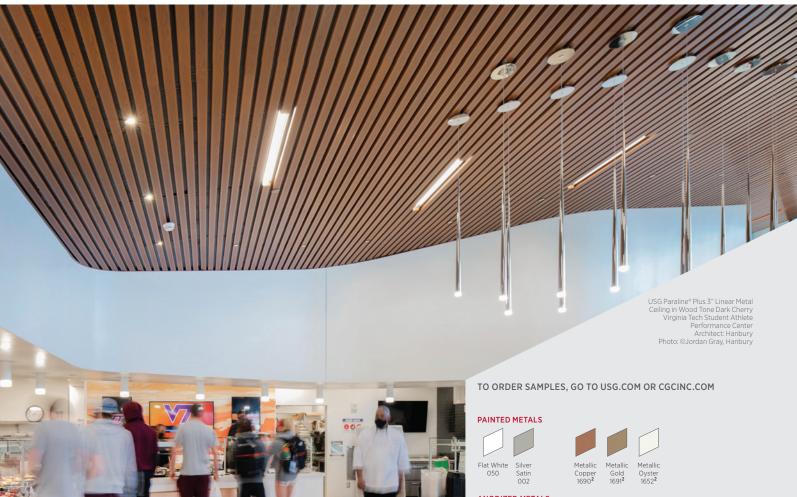

FEATURES AND BENEFITS

- Elegant linear metal ceiling system features 12' long metal pans attached to a specially engineered suspension system.
- USG Paraline® Plus pans with Snap-Loc inserts are appropriate for exterior ceiling applications under protected soffits.
- Snap-up design offers unlimited access with minimum plenum depth requirements.
- Wind load tested and approved, including Miami-Dade NOA, for exterior applications with proper bracing and framing.
- Available with perforated pans and Acoustibond[™] backer for superior acoustical control.

APPLICATIONS

- Interior and Exterior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Wall Applications
- · Sloped Ceilings

- · Curved Ceilings
- · New Construction
- · Downward Accessible
- Concealed Grid

ANODIZED METALS



TIMBRE™ 3

Maple 4010













WOOD TONES 1,2 - TEXTURED















CUSTOM COLORS AVAILABLE





USG PARALINE® LINEAR METAL SYSTEMS

ORDER SAMPLES/LITERATURE USG: usg.com or samplit@usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES





PRODUCT INFORMATION

USG PARALINE® PLUS PERFORATION PATTERN

Materials	Typical Sizes	Finishes
USG Paraline® Plus: Aluminum.	USG Paraline® Plus: 3"x12', 7"x12', and 11"x12'	Painted, anodized or powder coated.
	Perforation Pattern CD06305NB (A062) Perforation on the horizontal face only. Perforation shown actual size. (Other perforations available - see Perforations Guide IC425)	


DETAILS

USG Paraline® Plus

0


0

0



USG Paraline* Plus ceilings use 3", 7", and 11" wide pan dimensions. Paraline* Plus pans, in 3", 7", and 11" widths, in conjunction with Snap-Loc and Monolithic Insert (not shown) are appropriate for exterior applications. Refer to USG Exterior Guide SC2561.

PERSPECTIVE

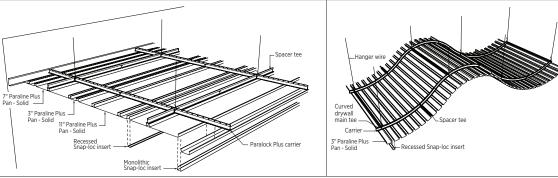

Light reflectance

Class A

ASTM E84 and CAN/ULC S102

Flame spread: 25 or less

surface-burning characteristics (with Acoustibond™ backer)

Low Emissions (VOC)

CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

PHYSICAL DATA

Product literature System brochure: IC726 Data sheet: IC315 Exterior Ceiling Systems Guide: SC2561 Perforations Guide: IC425 Warranty: SC2102 Cleaning Instructions: IC518

Online tools

usgdesignstudio.com or cgcdesignstudio.com

The Timbre finish used on Paraline* Linear incorporates a coating manufactured by a third party manufacturer which provides a 30-year limited warranty under the circumstances set forth in the warranty. This limited warranty is issued to USG Ceilings Plus, LLC and USG Interiors, LLC ("USG"). In the event our customer experiences a problem with the coating covered by the third party manufacturer's limited warranty, USG will use the information you provide to file a claim under the limited warranty.

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

High Recycled Content

Limitation Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more

Carrier systemsThe carrier systems for USG Paraline® and Paraline® Plus are not interchangeable and different carrier types may be required for exterior applications. For more information about USG Paraline® system components refer to IC463. For more information about exterior applications with Paraline* refer to SC2561.

information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction

- 3" and 7" Paraline® Plus Pans are available in Wood Tone Finish.
- 2 Inserts available in Wood Tone coordinating color
- Snap-Loc inserts are available in Timbre™ coordinating colors. Monolithic Inserts are available in Timbre™

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC724/rev. 7-23

