
USG WIREWORKS™ OPEN CELL CEILING PANELS

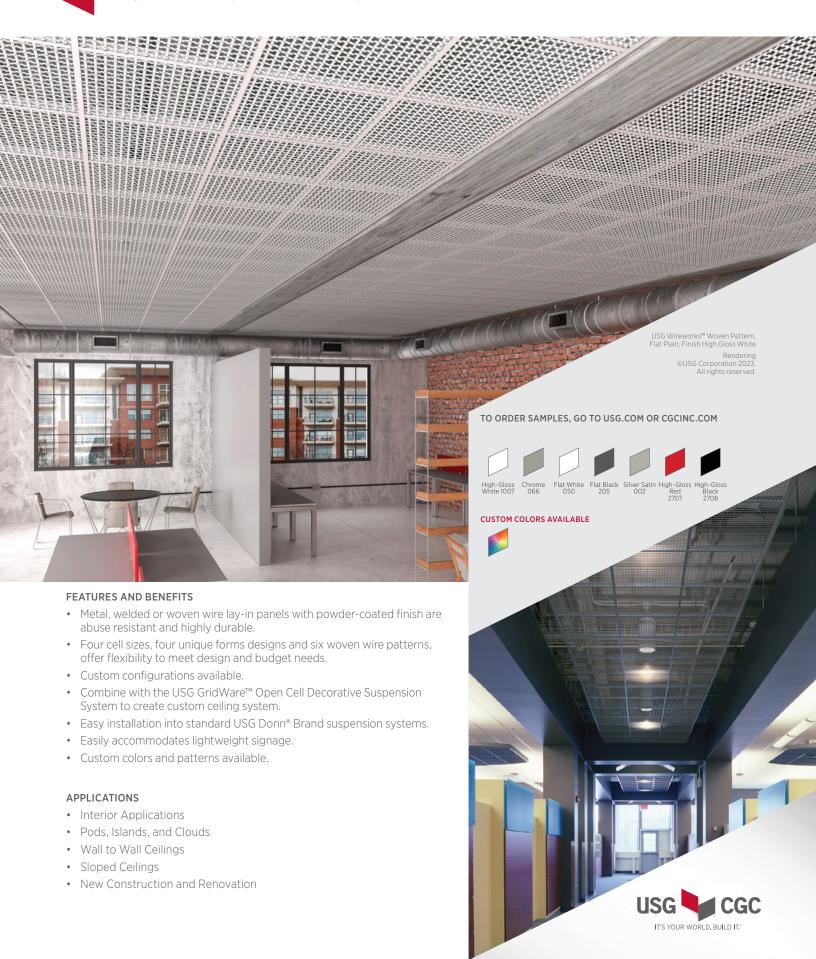

USG WIREWORKS™ OPEN CELL CEILING PANELS

ORDER SAMPLES/LITERATURE USG: usg.com or samplit@usg.com CGC: contact Sales Representative

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com usg.ecomedes.com

PRODUCT INFORMATION

USG WIREWORKS™ OPEN CELL CELLS PANELS 2'X2' 1/8" DIAMETER WIRE

Materials	Typical Sizes	Wire Thickness	
Robotically welded (Cells & Forms) Woven (Crimped) steel wire	2'x2' Cells, Forms & Woven 4'x4' Cells limited profiles (DX or DXW Grid)	Cells are 1/8" diameter Forms are 3/16" diameter Woven wires vary in wire size	
1"x1" Cells Open Area 86%	2"x2" Cells Open Area 87.1% Available in 4'x4' panel size	3"x3" Cells Open Area 91.2% Available in 4'x4' panel size	4"x4" Cells Open Area 94.2% Available in 4'x4' panel size
D-44	Format Donafile	Cid- Podil-	

USG WIREWORKS™ **OPEN CELL FORMS** 2'X2' 3/16" DIAMETER WIRE


Weave

Ripple

Small Wave

Big Wave

USG WIREWORKS™ OPEN CELL WOVEN 2' X 2' WITH VARIED **WIRE SIZES**

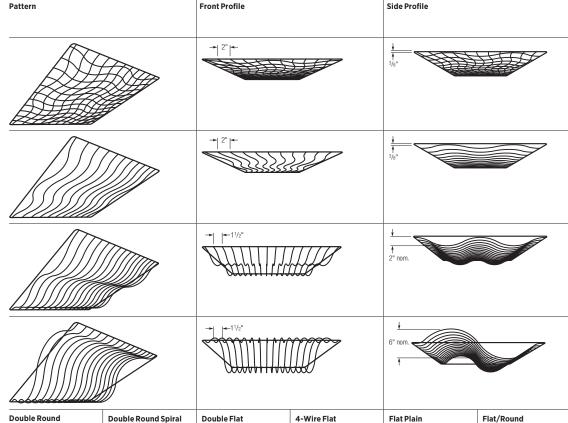

flat wire

29% open area

flat wire

51% open area

Low Emissions (VOC)

1/8" wire diameter

81% open area

CDPH 01350 v1.2-2017 compliance on select finishes, see usg.ecomedes.com for more details and documentation. Additional Documents and Resources Data Sheet: IC325 Warranty: SC2102 System Guide: IC34102 Cleaning Instructions: IC518

flat wire

61% open area

PHYSICAL DATA

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC325/rev. 7-24

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Online Tools

usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The trademarks USG, CGC, DONN, GRIDWARE, WIREWORKS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

1/8" wire diameter

52% open area

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



3/32" Flat and

1/16" dia. wires

41% open area