


USG ECLIPSE™/ECLIPSE™ HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

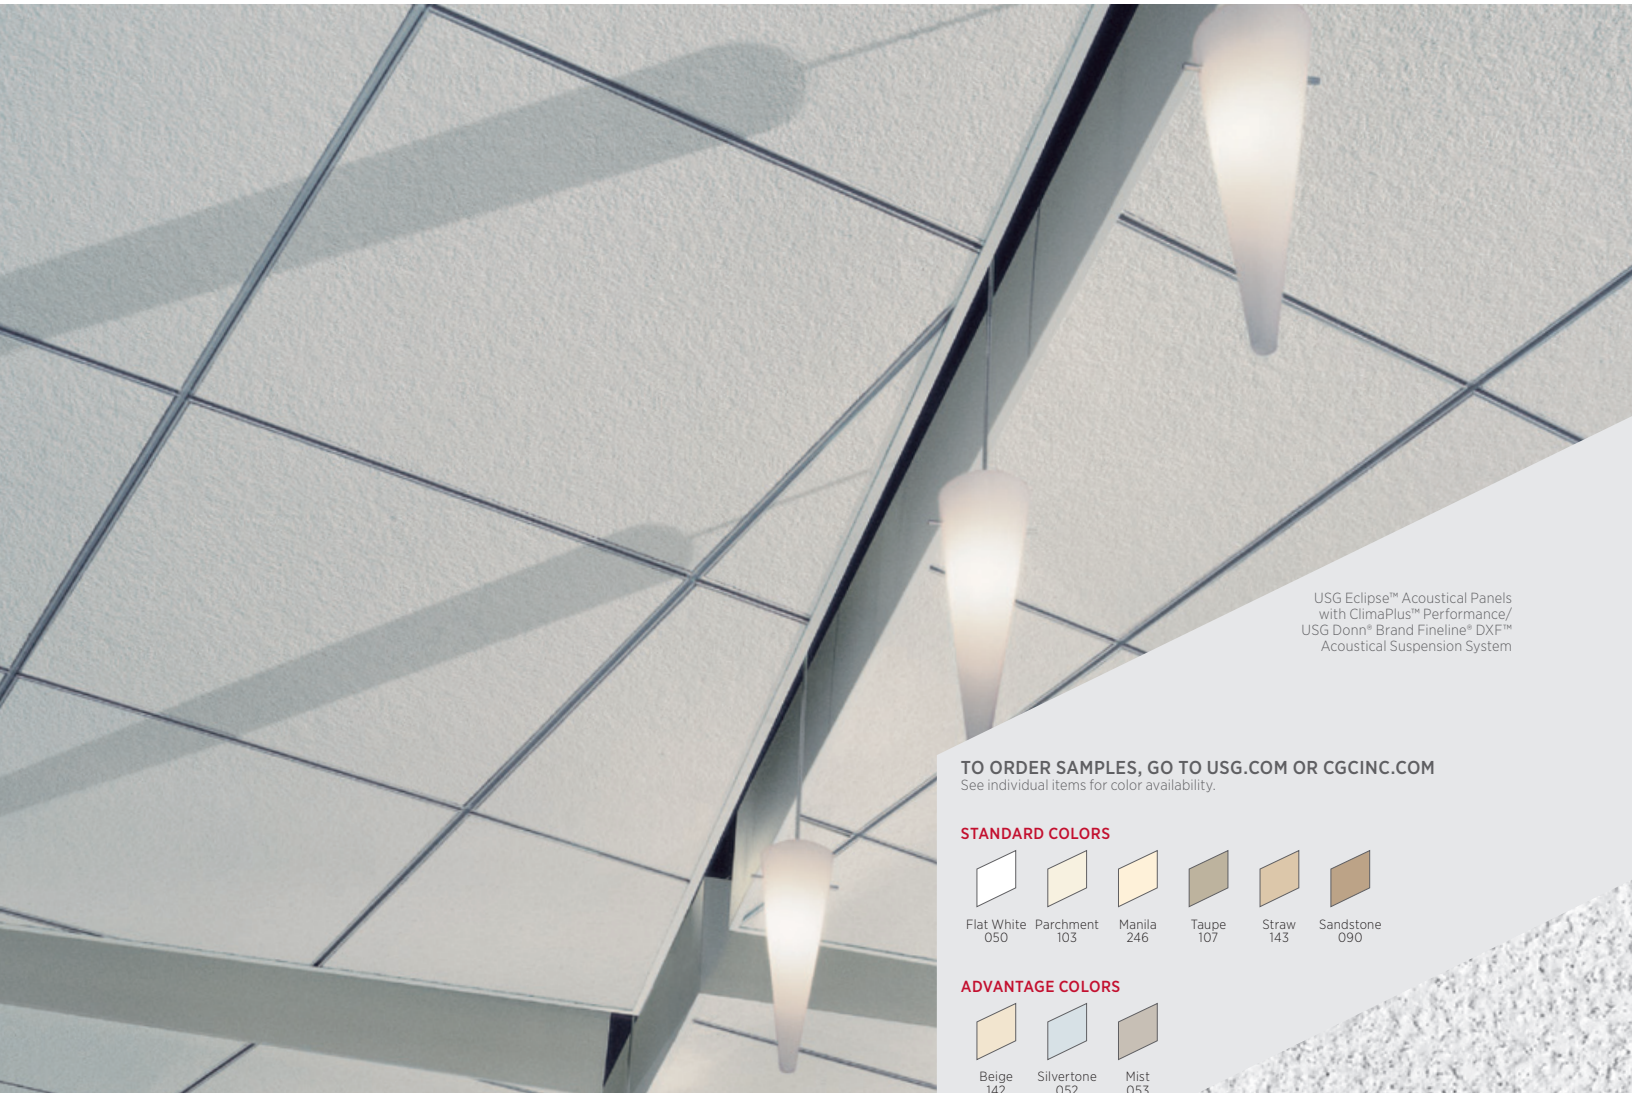


USG Eclipse™ Acoustical Panels
with ClimaPlus™ Performance/
USG Donn® Brand Finline® DXF™
Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

See individual items for color availability.

STANDARD COLORS



ADVANTAGE COLORS



FEATURES AND BENEFITS

- Elegant, fine-textured visual.
- Excellent noise reduction (up to NRC-0.75).
- Balanced Acoustics. High-NRC and High-CAC.
- Optional Firecode® product designed to meet life-safety codes.
- Available in Optimized Recycled Content products to help maximize LEED recycled content contribution.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Offices
- Conference areas
- Healthcare (HIPAA requirements)
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel



USG ECLIPSE™/ECLIPSE™ HIGH-NRC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818

30 YEAR LIMITED SYSTEM WARRANTY
• No Visible Sag
• Mold/Mildew Protection



10 YEAR AVAILABILITY
7675, 7677, 7697, 7875, 7877



USG ECLIPSE™ PANELS

Edge	Panel Size	Fire Rating ²	Item No.	UL Classified			Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
				NRC	CAC	LR ³						
SQ 	2'x2'x3/4"	Class A	76575	0.70	35	0.86	White	A, B, C	Low		79%	\$\$
	2'x2'x3/4"	Class A	76575HRC	0.70	35	0.85	White	A, B, C	Low		83%	\$\$
	2'x4'x3/4"	Class A	78575	0.70	35	0.86	White	A, B	Low		79%	\$\$
	2'x4'x3/4"	Class A	78575HRC	0.70	35	0.85	White	A, B	Low		83%	\$\$
SLT 	2'x2'x3/4"	Class A	76775	0.70	35	0.86	White ⁵ / Colors	D	Low		79%	\$\$
	2'x2'x3/4"	Class A	76775HRC	0.70	35	0.85	White	D	Low		83%	\$\$
	600x600x19	Class A	ME76775	0.70	35	0.86	White	D	Low		79%	\$\$
	2'x2'x3/4"		76779	0.60	35	0.86	White	D	Low		64%	\$\$
	2'x4'x3/4"	Class A	78775	0.70	35	0.86	White	D	Low		79%	\$\$
	2'x4'x3/4"	Class A	78775HRC	0.70	35	0.85	White	D	Low		83%	\$\$
FL 	2'x2'x3/4"	Class A	76975	0.70	35	0.86	White ⁵ / Colors	E, G, H, J	Low		79%	\$\$
	2'x2'x3/4"	Class A	76975HRC	0.70	35	0.85	White	E, G, H, J	Low		83%	\$\$
	600x600x19	Class A	ME76975	0.70	35	0.86	White	E, G, H, J	Low		79%	\$\$
	2'x2'x3/4"		76979	0.60	35	0.86	White	F, I	Low		64%	\$\$
	2'x4'x3/4"	Class A	78975	0.70	35	0.86	White	E, G, H, J	Low		79%	\$\$
	2'x4'x3/4"	Class A	78975HRC	0.70	35	0.85	White	E, G, H, J	Low		83%	\$\$
SQ 	2'x2'x7/8"	Class A	76520	0.75	35	0.86	White	A, B, C	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76521	0.75	35	0.86	White	A, B	Low		81%	\$\$\$
SLT 	2'x2'x7/8"	Class A	76522	0.75	35	0.86	White	D	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76523	0.75	35	0.86	White	D	Low		81%	\$\$\$
FL 	2'x2'x7/8"	Class A	76524	0.75	35	0.86	White	E, G, H, J	Low		81%	\$\$\$
	2'x4'x7/8"	Class A	76525	0.75	35	0.86	White	E, G, H, J	Low		81%	\$\$\$
BESK 	12"x12"x3/4"	Class A	70073	0.60	40	0.86	White	K	Low		76%	\$\$\$\$

USG ECLIPSE™ HIGH-NRC PANELS

USG ECLIPSE™ TILE^{6,7}

Low Emissions
Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v.1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁴
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



GRID PROFILE OPTIONS

A USG DX [®] / DXL™	B USG DXW™	C ⁹ USG Centricitee™ DXT™	D USG DX [®] / DXL™	E USG Centricitee™ DXT™	F USG Centricitee™ DXLT™	G USG Fineline [®] DXF™	H USG Fineline [®] 1/8 DXFF™	I USG Fineline [®] DXLF™	J USG Identitee™ DXI™	K USG DX [®] / DXL™ Concealed

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1812

ASTM E1264 classification
Type III, Form 1, Pattern EI

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
FR-X1

Imperial weight
1.00-1.15 lb./sq. ft. (Class A panels and tile)
1.12 lb./sq. ft. (Firecode® panels)

Metric weight
5.07 kg/m² (Class A panels)

Thermal resistance
R-2.0 (Class A), R-1.9 (Firecode®)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

- Notes**
- For details, see LEED report at usgdesignstudio.com or cgcdesignstudio.com.
 - Fire-rated items: see UL design details.
 - LR values shown as averages.

4. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

5. See Colors selector for more information. Metric: white only.

6. Contact USG for adhesive recommendations for 12"x12" glue-up applications.

7. Not UL Classified for acoustics.

8. Maximum 2'x2' with SQ edge panels.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1812/rev. 3-17
© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXL, DXL, DXLF, DXLT, DXT, DXW, ECLIPSE, FINELINE, FIRECODE, IDENTITEE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

