## **BEADEX**<sup>®</sup> Brand

# paper faced metal bead and trim





For the most beautiful, cost-effective, problem-free corners, the logical choice is BEADEX paper faced metal bead and trim. Fast, easy installation means reduced labor costs, while superior product performance eliminates costly job callbacks, saving money and ensuring customer satisfaction. With the tape-on versions, nailing is not required, so installation and corner alignment are easier, and there are no nails to pop when wood framing shrinks. The paper tape covering ensures excellent adhesion of joint compounds, textures and paints for a strong, smooth finish.

BEADEX paper faced metal bead and trim provides superior resistance to edge cracking and chipping for a look that stays beautiful despite the stresses of normal building movement and everyday wear and tear. In fact, USG warrants that BEADEX paper faced metal tape-on bead and trim will not edge crack for the lifetime of the structure using recommended application techniques (refer to warranties J1713 (tape-on bead) or J1720 (nail-on bead) for full warranty details). The unique "nose coating" on the paper tape covering resists scuffing and fuzzing from knives and sanding.

Nail-on versions of the bead and trim are designed for applications where nailing or other mechanical fastening is desired. They use the same paper faced metal technology to provide excellent bond adhesion qualities for joint compounds, textures and paints.


For technical product information, refer to BEADEX paper faced metal bead and trim submittal sheet (J1646).

2

#### 90° and Offset Outside Corner Bead

BEADEX Paper Faced Metal Outside Corner, Tape-On Bead (B1W, B1XW, B1 Super Wide)

BEADEX Paper Faced Metal Outside Corner, Tape-On Bead (MICRO BEAD™)




Use for 90° outside corners. Suitable for use on any thickness of wallboard. Standard lengths: 8', 9', 10'.


	Dimensions			
Style	Α	В	C	D
B1W	3/4"	13/16"	9/16"	3/4"
B1W EL	3/4"	11/16"	11/16"	3/4"
B1XW	5/8"	15/16"	11/16"	5/8"
B1XW EL	5/8"	13/16"	13/16"	5/8"
B1XW NB	5/8"	15/16"	11/16"	5/8"
B1XW ELNB	5/8"	13/16"	13/16"	5/8"
B1 Super Wide*	11/16"	1-1/16"	1-1/16"	11/16"

Note: XW = Extra Wide; EL = Even Leg; NB = No Bead. \* Does not meet ASTM C1047

Designed with a wider 1" by 1" profile that's easier to install on all cut edges. Reduced bead height results in less use of joint compound. In most cases, reduces the amount of compound needed by one coat. Standard lengths: 8', 10'.

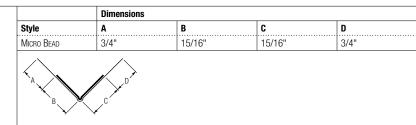

BEADEX Paper Faced Metal Offset Outside Corner, Tape-On Bead (B1 OS) Designed for 135° corners. Offset bead is designed to give a true offset corner with a smaller bead height requiring less compound to finish. Can be used on any thickness of wallboard. Standard lengths: 8', 9', 10'.





	Dimensions			
Style	Α	В	C	D
B1 0S	5/8"	3/4"	1/2"	5/8"
Note: OS = Offset		-		





BEADEX Paper Faced Metal Outside Corner, Nail-On Bead (ULTRA BEAD<sup>™</sup>)


Use for applications where nailing or other mechanical fastening is required. Has wider flanges for easier nailing and maximum corner coverage. Can be fastened to 1/2" or 5/8" drywall with nails, staples, or screws. Does not meet ASTM C1047. Standard lengths: 8', 9', 10'.



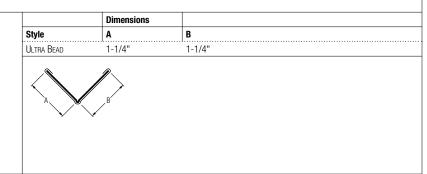


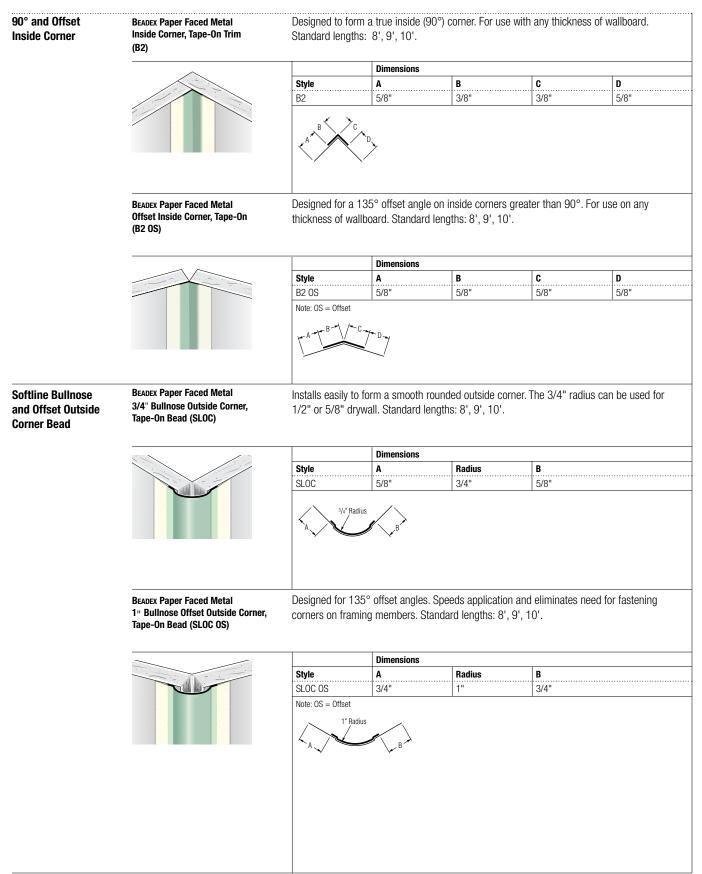

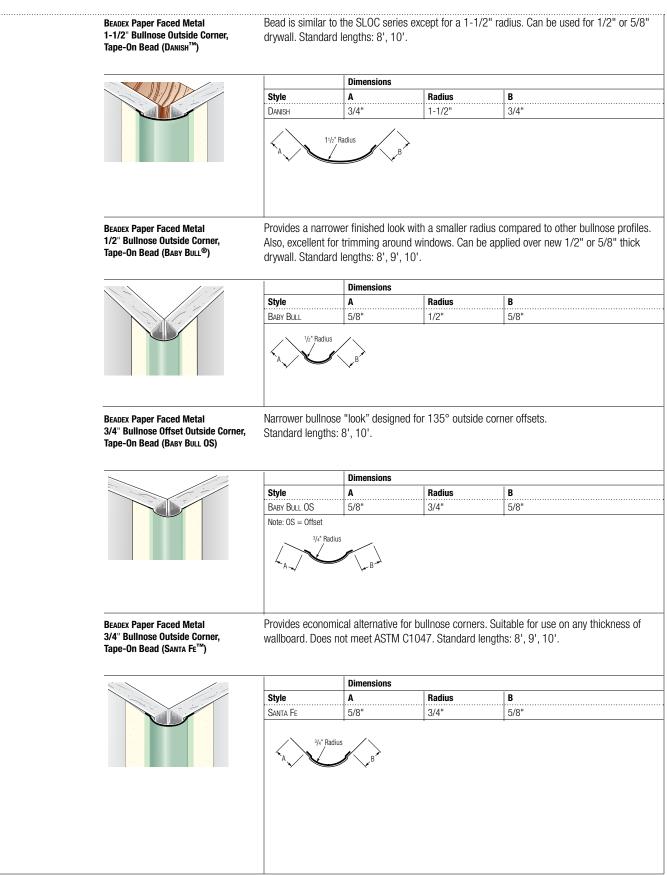

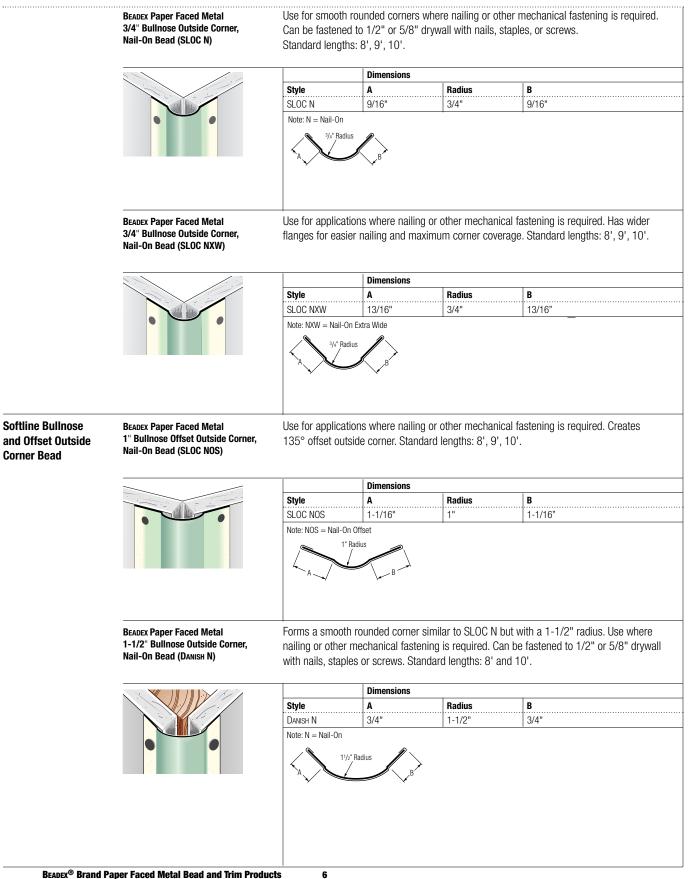

	BEADEX Paper Faced Metal 1/2" Bullnose Outside Corner, Nail-On Bead (BABY BULL N)	Provides a nar Also excellent	rower finished loo	k with a smaller rad nd windows. Use w	dius compared to other bu here nailing or other mecl	Illnose profiles.
			Dimensions			
		Style	A	Radius	В	
		BABY BULL N	3/4"	1/2"	3/4"	
		Note: N = Nail-On				
	BEADEX Paper Faced Metal 3/4" Bullnose Outside Corner, Nail-On Bead (Santa Fe N)	drywall with na		for bullnose corner ews. Does not mee	s. Can be fastened to 1/2 t ASTM C1047.	" or 5/8"
			Dimensions			
		Style	A	Radius	В	
		SANTA FE N	9/16"	3/4"	9/16"	
oftline Bullnose and ffset Inside Corners	BEADEX Paper Faced Metal 3/4" Bullnose Inside Corner, Tape-On (SLIC)		Standard lengths:		3/4" radius trim is suitabl	e for 1/2" or
	<u>^</u>	Style	Dimensions A	Radius	В	
		SLIC	3/4"	3/4"	3/4"	
	BEADEX Paper Faced Metal 1" Bullnose Offset Inside Corner, Tape-On (SLIC OS)		3" drywall. Standai	fset angles. Create: rd lengths: 8', 10'.	s smooth rounded inside o	corner suitable
			Dimensions			
		Style	A	Radius	B	
		SLIC OS	5/8"	1"	5/8"	
		Note: OS = Offset	dius B			

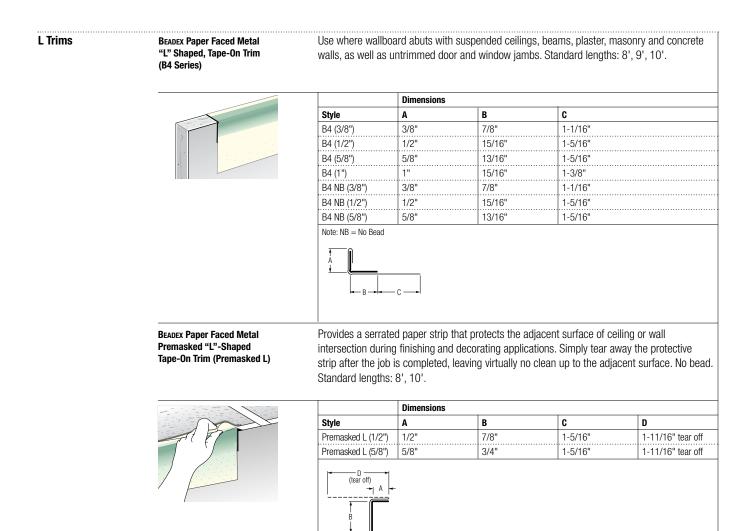

Trims	Beadex Paper Faced Metal "J"-Shaped, Tape-On Trim (B9)	Tape-on "J" trim completely surrounds the rough edge of the wallboard, providing a strong and clean corner. Tape-on application eliminates frustration with nailing and nail shrink back Can be used for finishing off bifold closet doors, as well as under all door and window encasements, and to finish rough drywall ends. Does not meet ASTM C1047. Standard lengths: 7', 8', 10'.					
		Style B9J (1/2") B9J (5/8")	Dimensions   A   1/2"   1/2"	<b>B</b> 9/16" 5/8"	C 5/8" 5/8"	<b>D</b> 1-1/8" 1-1/8"	
eveal Trims	BEADEX Paper Faced Metal Reveal, Tape-On Trim (Reveal NB)	on soffits, wall a Reveal NB featu the need to caul	reas, ceilings, ligh res a paper flange	nt boxes and othe e on both trim leg eal details, provid	er interior architectors. The additional p	d with reveal details ural components. aper flange eliminates straighter line. Availabl	
		Style Reveal NB (1/2") Reveal NB (5/8") Note: NB = No Bead $\downarrow$ $\downarrow$ $\downarrow$ $\downarrow$ $\downarrow$ $\downarrow$ $\downarrow$ $\downarrow$	Dimensions   A   15/16"   15/16"   - A D	<b>B</b> 1/2" 5/8"	C 1/2" 5/8"	D 3/4" 5/8"	
	Shadowline Tape-On Reveal Trim	Designed to prov Standard length		hadowline" where	e wallboard abuts v	vith a suspended ceilir	
			Dimensions				
		Style	A	В	C	D	
		SL (1/2")	1/2"	1/2" 5/8"	15/16"	1-1/4"	
			0		7/8"	15/16"	

Can be formed to fit any inside or outside angle. Available in 2-1/16" width that has two 7/16"

	Dimensions						
	Style	A	B	C	D		
	Flex Tape (2-1/16"	) 9/16"	7/16"	7/16"	9/16"		
	Flex Tape (4")	1-1/8"	7/8"	7/8"	1-1/8"		
BEADEX B1 Flex Metal Corner, Tape-On Outside Flexible	Available in 3" w	idth and manuf	actured with two 3	raight, strong outsid	el strips laminated to		
Corner (B1 Beaded Flex)	(nose) in the flex	ible gap to prov					
Corner (B1 Beaded Flex)	(nose) in the flex	ible gap to prov	ide faster, easier f		compound. For use or		
Corner (B1 Beaded Flex)	(nose) in the flex	ible gap to provess. Standard le	ide faster, easier f				
Corner (B1 Beaded Flex)	(nose) in the flex wallboard thickno	ible gap to prov ess. Standard le Dimensions A	ide faster, easier f ingths: 8', 9', 10'.		ompound. For use or		

Tape-On Flexible

**Corner Bead** 

**Outside and Inside** 

BEADEX Flex Metal Tape,



#### Website USg.com

Technical Service 800 USG.4YOU

Samples/Literature E-mail samplit@usg.com

 $\frac{\text{Samples/Literature Fax}}{888\ 874.2348}$ 

Customer Service 800 950.3839

#### SAFTEY FIRST

Follow good safety and industrial hygiene practices during handling and installing all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read material safety data sheets and related literature on products before specification and/or installation.

#### Trademarks

The following trademarks used herein are owned by United States Gypsum Company: BABY BULL, BEADEX, DANISH, MICRO BEAD, SANTA FE, ULTRA BEAD, USG, USG in stylized letters. Notice

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered. Note

All products described here may not be available in all geographic markets. Consult your local sales office or representative for more information.

