

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



### High-quality floor underlayment primer concentrate

- For priming and sealing concrete subfloors
- Enhances bond between substrate and underlayment
- Low odor



1 SQUARE METER OF APPLIED COATING AT THE STANDARD APPLICATION RATE - 5-GALLON PAIL	CRADLE-TO-GRAVE (A1-C4)
<b>Global Warming Potential (kg CO<sub>2</sub> eq.)</b>	<b>4.47E-01</b>
<b>Ozone Depletion Potential (kg CFC 11 eq.)</b>	<b>6.51E-15</b>
<b>Acidification Potential (kg SO<sub>2</sub> eq.)</b>	<b>1.21E-03</b>
<b>Eutrophication Potential (kg N eq.)</b>	<b>1.01E-04</b>
<b>Photochemical Ozone Creation Potential (kg O<sub>3</sub> eq.)</b>	<b>1.96E-02</b>
<b>Abiotic Resource Depletion Potential Fossil Fuels (MJ, LHV)</b>	<b>1.39E+00</b>

For over a century, sustainable practices have naturally been an inherent part of our business at USG and CGC. Today, they help shape the innovative products that become the homes where we live, the buildings where we work and the arenas where we play. From the product formulations we choose, to the processes we employ, USG and CGC are committed to designing, manufacturing, and distributing products that minimize overall environmental impacts and contribute toward a healthier living space. We believe that transparency of product information is essential for our stakeholders and Environmental Product Declarations (EPDs) are the next step toward an even more transparent USG and CGC. For additional information, visit [usg.com](http://usg.com), [cgcinc.com](http://cgcinc.com) and [usg.ecomedes.com](http://usg.ecomedes.com).



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



This declaration is an Environmental Product Declaration (EPD) in accordance with ISO 14025 and ISO 21930; 2017. EPDs rely on Life Cycle Assessment (LCA) to provide information on a number of environmental impacts of products over their life cycle.

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts, and the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: In order to support comparative assertions, this EPD meets all comparability requirements stated in ISO 14025:2006. However, differences in certain assumptions, data quality, and variability between LCA data sets may still exist. As such, caution should be exercised when evaluating EPDs from different manufacturers or programs, as the EPD results may not be entirely comparable. Any EPD comparison must be carried out at the construction works level per ISO 21930:2017 guidelines. The results of this EPD reflect an average performance by the product and its actual impacts may vary on a case-to-case basis.

DECLARATION NUMBER	EPD 418	
PROGRAM OPERATOR	ASTM International – 100 Barr Harbor Drive, West Conshohocken, PA USA www.astm.org	
DECLARATION HOLDER	USG Corporation - 550 W. Adams St., Chicago, IL USA	
DECLARED PRODUCT	USG Levelrock® Brand Acrylic Concrete Primer	
REFERENCE PCR	NSF: PCR for Resinous Floor Coatings; valid through December 17, 2023	
PRODUCT CATEGORY	Resinous floor coating; subcategory thin-mil	
DATE OF ISSUE	2/6/23	
PERIOD OF VALIDITY	5 Years	
CONTENTS OF THE DECLARATION	This EPD is complete and contains the following: <ul style="list-style-type: none"> <li>• Product System Documentation</li> <li>• Life Cycle Calculation Rules</li> <li>• Life Cycle Assessment Results</li> <li>• References</li> </ul>	
This declaration was independently verified in accordance with ISO 14025 and ISO 21930:2017 <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL	Tim Brooke, ASTM International	
This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by:	Thomas P. Gloria, Industrial Ecology Consultants	



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

### 1. Product System Documentation

---

#### 1.1 Product Description and Product Identification

Used with Levelrock® Brand floor underlayments, USG Levelrock® Brand Acrylic Concrete Primer is a high-solids sealant that is used to coat concrete and precast concrete subfloors prior to installation of USG Levelrock® floor underlayments. Concrete surfaces tend to be highly porous. Without first sealing a concrete substrate, the bond with and surface smoothness of the floor underlayment poured on top could be adversely affected. This product is available in 5-gallon pails from USG's Gypsum, OH facility and in 53-gallon drums and 275-gallon totes from USG's Walworth, WI facility. Note that coatings typically assessed using the PCR for resinous floor coatings include additional coating layers (i.e. basecoat and topcoat) beyond those manufactured by USG.

#### 1.2 Designated Application

USG Levelrock® Brand Acrylic Concrete Primer is intended to be used with Levelrock® Brand floor underlayments as a sealant to coat concrete and precast concrete subfloor prior to installation of USG Levelrock® floor underlayments.

#### 1.3 Product Technical Data

Levelrock® Brand Acrylic Concrete Primer is applied initially in a fully diluted form (1 part Levelrock® Acrylic Concrete Primer to 4 parts water by volume) and then as a partially diluted form (1 part Levelrock® Acrylic Concrete Primer to 1 parts potable water ). For proper mixing, add the Levelrock® Acrylic Concrete Primer to the water and stir gently to achieve a homogenous state. Avoid entraining air and subsequent bubbles and do not over-stir or use a high-speed mixer. Apply fully diluted primer at a rate of 200 sq. ft./gal. Allow to dry 1 hour. USG Levelrock® Acrylic Concrete Primer may initially be sprayed or rolled onto the subfloor, but using a push broom to further work sealer into the subfloor is strongly recommended, especially for the first coat. Apply second coat, using partially diluted mixture (see mixing instructions) at a rate of 300 sq. ft./gal. General instructions pertaining to the installation and use of the USG Levelrock® Acrylic Concrete Primer may be found on [usg.com](http://usg.com).

#### 1.4 Placing on the Market/Application Rules

USG Levelrock® Brand Acrylic Concrete Primer must be installed in accordance with all applicable USG installation guidelines. Further detail may be found on the [USG.com](http://USG.com) website.

#### 1.5 Delivery Status

USG Levelrock® Brand Acrylic Concrete Primer is available in 5-gallon pails, 53-gallon drums and 275-gallon totes.

**1.6 Product Composition**

**Table 2: Product formula**

Ingredient	LEVELROCK® BRAND ACRYLIC CONCRETE PRIMER
Urea	< 5%
Alkylaryl polyether	< 2%
Ammonium hydroxide	< 1%
Zinc omadine	< 0.1%
5-Chloro-2-methyl-2H-isothiaazo 1-3-one	< 0.005%

**1.7 Product Manufacture**

USG Levelrock® Brand Acrylic Concrete Primer is produced and packaged on a commercial coating line. The preparation of this product consists of blending the various liquid ingredients using a large volume high shear mixer. Packaging is conducted on a dedicated packaging line adjacent to each blending operation. Rigorous inspections insure that the finished product meets quality requirements. Any waste generated during product manufacturing is shipped to an appropriate landfill using a distance of 32 km (20 miles) by truck. All raw materials utilized a shipping distance of 1207 km (750 miles).

**1.8 Environment and Health During Manufacturing**

USG and CGC have led the building sector’s effort in developing and supplying sustainable construction materials. Today, sustainability is integrated into the design and manufacture of USG’s wall, ceiling, and flooring products. As both a producer and a buyer of raw materials, we have a responsibility to extensively review and select each material we use. Each decision we make is based on careful consideration of environmental and safety effects over time. Raw materials used in our products are carefully selected and go through a screening procedure. Incoming raw materials are tested for contaminants by an internal lab and third-party labs for consideration of use and worker, environmental, and end-user exposure. This due diligence helps to ensure our products are safe to handle in our manufacturing plants and on job sites while having minimal impact on occupant health and indoor and outdoor environments.

**1.9 Packaging**

USG Levelrock® Brand Acrylic Concrete Primer is available in 5-gallon pails, 53-gallon drums and 275-gallon totes. Both the production and disposal of these packaging materials was modeled in this study.

**Table 3: A5 Product Packaging Waste per 1 Square Meter of Applied Coating**

<u>Module</u>	<u>Packaging</u>	<u>Scenario</u>	<u>Mass of Packaging Waste</u>	<u>GWP Biogenic Content</u>
A5 Installation of the product	5-Gal. Pail	Standard Application Rate	6.98E-03 kg	0.0 kg
	53-Gal. Drum	Standard Application Rate	3.37e-02 kg	0.0 kg
	275-Gal. Tote	Standard Application Rate	2.04e-02 kg	0.0 kg



# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



### 1.10 Conditions of Use

USG Levelrock® Brand Acrylic Concrete Primer must be installed in accordance with all applicable USG installation guidelines. Approved installation procedures are provided in the various submittal sheets specific to each product and must be followed. Installation of these products is accomplished by manual labor using mostly hand tools. No material or energy inputs are required on the jobsite.

### 1.11 Distribution

As noted in the PCR, the default distances for the transport of finished products from manufacturing to the distribution center is taken to be 402 km (250 miles) and from the distribution center to the point of sale is taken to be 804 km (500 miles) for a total of 1206 km (749 miles) by truck. Final transportation distance from the point of sale to the application site is taken to be 8 km (5 miles) by auto.

### 1.12 Product Installation

USG Levelrock® Brand Acrylic Concrete Primer must be installed in accordance with all applicable USG installation guidelines. Approved installation procedures are provided in the various submittal sheets specific to each product. Installation of these products is accomplished by manual labor using mostly hand tools. No material or energy inputs are required on the jobsite. A 2% installation waste factor was utilized in this study as dictated in the PCR. The 5-gallon pails and 275-gallon totes are assumed to go to landfill while the steel 53-gallon drums are assumed to be recycled in this study.

### 1.13 Use Stage

USG Levelrock® Brand Acrylic Concrete Primer is intended to enhance the adhesion of concrete and precast concrete subfloors to USG Durock™ Brand Multi-Use Self-Leveling Underlayments. This product is not the final wearable surface and is always intended to be covered by a self-leveling underlayment. As such, this product becomes a permanent part of the floor structure and is not intended to be replaced during the life of the building. Accordingly, there are no use (B1), maintenance(B2), repair(B3), replacement (B4), refurbishment (B5), operation energy (B6), or water (B7) inputs during the life of this product.

### 1.14 Environment and Health During Use Stage

This product is not expected to produce any unusual hazards during normal use. Proper personal protective gear should be worn by the installer for protection.

### 1.15 Re-Use Phase

At end of life, there are zero components for reuse, zero materials for recycling, zero materials for energy recovery and zero recovered energy from the product system.

### 1.16 End-of-Life Disposal

All waste generated at end-of-life is assumed to be disposed of in an appropriate landfill. The transport distance at end of life is assumed to be 32 km (20 miles).

“Significant data limitations currently exist within the LCI data used to generate waste metrics for Life Cycle Assessments and Environmental Product Declarations. The waste metrics were calculated in a way conformant with the requirements of ISO 21930:2017, but these values represent rough estimates and are for informational purposes only. As such, no decisions regarding actual cradle-grave waste performance between products should be derived from these reported values.”



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



### 2. LCA Calculation Rules

#### 2.1 Functional Unit

For this study, both the declared unit and functional unit are defined to be the quantity of coating required to cover 1 square meter of floor as presented in the submittal sheet for each product.

**Table 3: Functional unit (1 square meter of applied coating)**


Product	1st Application		2nd Application		Product Weight (lbs./gal)	Combined Applications	
	<u>Recommended Dilution Rate (gal H2O/gal product)</u>	<u>Recommended Coverage (sf/gal of product)</u>	<u>Recommended Dilution Rate (gal H2O/gal product)</u>	<u>Recommended Coverage (sf/gal of product)</u>		<u>Application Rate (lbs. of undiluted product/sf)</u>	<u>Application Rate (lbs. of undiluted product/m2)</u>
USG Levelrock Acrylic Concrete Primer	4	1000	1	600	8.5	0.0227	0.2439

#### 2.2 Reference Service Life

USG Levelrock® Brand Acrylic Concrete Primer is intended to enhance the adhesion of the subfloor to USG Durock™ Brand Multi-Use Self-Leveling Underlayments. USG Levelrock® Brand Acrylic Concrete Primer is not the final wear surface and is always intended to be covered by a self-leveling underlayment and then a finish floor covering. As such it becomes a permanent part of the floor structure and is not intended to be replaced during the life of the building. A default RSL of 60 years is assumed for the product. An assumed Estimated Service Life (ESL) of 60 years shall be used for building life.

#### 2.3 System Boundary

This EPD represents a “cradle-to-grave” LCA analysis for USG Levelrock® Brand Acrylic Concrete Primer. It covers all the production steps from raw material extraction (i.e., the cradle) to end of life disposal (grave).

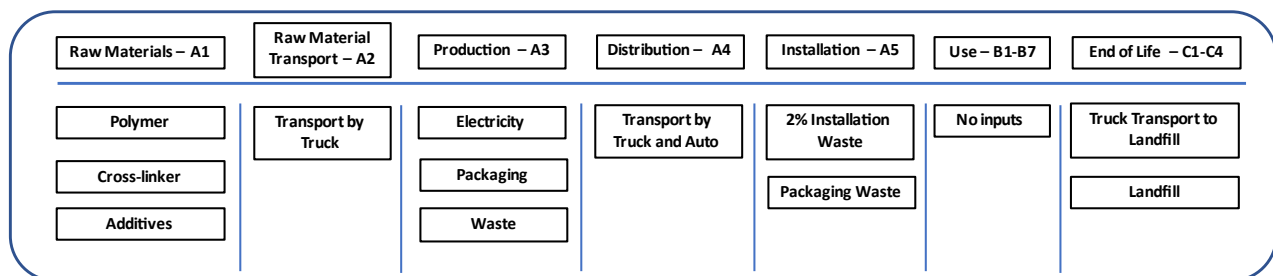

**Figure 1: Specific processes covered by this EPD by life cycle stage**

#### 2.4 Estimates and Assumptions

The results are limited by the choice of proxy processes rather than actual supplier generated primary data. This would include the following processes. A GaBi supplied dataset for a specific polymer was used as a proxy for a vendor-supplied polymer. In addition, the data is limited in that the primary data was collected during 2021 and changes in operations may increase/decrease impacts in the future. Other data limitations include the use of secondary data sets instead of primary data for upstream and downstream processes, local impacts vs. global impacts, possible impacts vs. actual impacts, inherent uncertainty in the data sets, accuracy, and precision of impact assessment methodology, etc. Both human activity and capital equipment were excluded from the system boundary.



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

### 2.5 Cut-off Criteria

The applicable cut-off rules are described in ISO 21930:2017 clause 7.1.8. The cut-off criteria shall be 1% of renewable primary resource (energy), 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process and 1% of environmental impacts. The total of neglected input flows per module shall be a maximum of 5% of energy usage, mass, and environmental impacts. For materials characterized as hazardous by the Globally Harmonized System (GHS), cut-off rules do not apply and such substances shall be included in the inventory.

### 2.6 Background Data

All background was sourced from critically reviewed GaBi databases.

### 2.7 Data Requirements and Data Sources

The LCA model was created using the GaBi software from Sphera. Specific comments related to data quality requirements cited in ISO 14025 Section 4.2.3.6.2 include the following.

**Temporal:** In the case of production, the LCI data was collected for the 2021 production year.

**Geographical:** Where possible, all processes were chosen as being representative of US manufacturing processes.

**Technical:** The data selected for this study is specific to the technology used in the preparation of the various raw materials.

**Precision:** The raw material usage amounts were derived from plant quality data and on plant product formulas.

**Completeness:** Virtually all the significant raw material flows (> 99%) have been modeled.

**Representative:** Where possible all the data sets were selected to be representative of US-based production, are less than 10 years in age and are representative of the technology being employed.

**Consistency:** All the manufacturing processes were modeled in a consistent manner throughout this study in accordance with the goal and scope definitions.

**Reproducibility:** The information contained in this study, including raw material, energy and transportation distance inputs, have been fully documented in the LCA report.

**Sources of Data:** The sources for the processes used in this study have been fully provided in the LCA report and are representative of the material and energy sources used in actual production.

**Uncertainty:** The relative uncertainty associated with this study has been minimized. No significant assumptions have been made.

### 2.8 Period Under Review

All raw material and energy inputs are for the 2021 calendar year.

### 2.9 Allocation

No allocation was required in this study. The LCI data was collected for the 2021 production year.

**2.10 Comparability**

Per ISO 21930:2017, comparability of product systems using this reference PCR shall only be done in the context of construction works and shall meet all requirements listed in Section 5.5.

Additionally, comparative assertions (i.e., superiority claims vs. a competing product) regarding the specific product system shall not be made in the EPD and any comparison must also consider both the limitations of LCA as only potential impacts are being reported by the EPD (damage is not being assessed). All EPDs must contain the statement on the limitations of the study described in Section 13 of this reference PCR.

**3. Life Cycle Assessment Results**

Product stage				Construction process stage				Use stage				End of life stage			
Raw Material Supply	Transport	Manufacturing	Transport	Construction-Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational water Use	De-construction Demolition	Transport	Waste processing	Disposal
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

**Figure 2: System Boundary**



# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



The following results cover the application of Levelrock® Brand Acrylic Concrete Primer applied at the recommended application rate (see section 1.4 above). These results are specifically for a 5-gallon pail container.

Environmental LCA Results for Levelrock® Brand Acrylic Concrete Primer										
1 Square Meter of Applied Coating at the Standard Application Rate - 5-Gallon Pail - Gypsum, OH										
Impact Assessment Method: TRACI 2.1	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category		Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global Warming	kg CO2 eq.	3.50E-01	7.01E-02	9.80E-03	0.00E+00	0.00E+00	8.35E-04	0.00E+00	1.58E-02	4.47E-01
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	5.99E-15	1.33E-16	1.42E-16	0.00E+00	0.00E+00	1.58E-18	0.00E+00	2.48E-16	6.51E-15
Acidification Potential	kg SO2 eq.	1.07E-03	7.17E-05	3.45E-05	0.00E+00	0.00E+00	2.53E-06	0.00E+00	3.47E-05	1.21E-03
Eutrophication Potential (EP)	kg N eq.	7.51E-05	1.71E-05	6.87E-06	0.00E+00	0.00E+00	2.59E-07	0.00E+00	1.66E-06	1.01E-04
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	1.68E-02	1.71E-03	4.04E-04	0.00E+00	0.00E+00	5.77E-05	0.00E+00	6.74E-04	1.96E-02
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	1.22E+00	1.26E-01	2.89E-02	0.00E+00	0.00E+00	1.56E-03	0.00E+00	8.44E-03	1.39E+00

Resource and Waste Flows for Levelrock® Brand Acrylic Concrete Primer										
1 Square Meter of Applied Coating at the Standard Application Rate - 5-Gallon Pail - Gypsum, OH										
Use of Primary Resources	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	3.33E-01	5.85E-02	9.84E-03	0.00E+00	0.00E+00	4.58E-04	0.00E+00	9.79E-03	4.12E-01
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	9.64E+00	9.53E-01	2.12E-01	0.00E+00	0.00E+00	1.18E-02	0.00E+00	6.77E-02	1.09E+01
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Secondary material, secondary fuel and recovered energy										
Secondary Material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	2.19E-03	2.96E-04	4.49E-05	0.00E+00	0.00E+00	1.65E-06	0.00E+00	1.67E-05	2.55E-03
Additional inventory parameters for transparency										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	1.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	4.35E-05	3.83E-05	1.95E-06	0.00E+00	0.00E+00	5.87E-07	0.00E+00	7.10E-06	9.15E-05
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Indicators describing waste										
Hazardous waste disposed	kg	4.74E-10	6.10E-12	1.08E-11	0.00E+00	0.00E+00	4.90E-14	0.00E+00	3.63E-12	4.95E-10
Non-hazardous waste disposed	kg	8.77E-03	2.25E-04	1.29E-02	0.00E+00	0.00E+00	1.01E-06	0.00E+00	3.43E-01	3.65E-01
High-level radioactive waste	kg	1.86E-04	2.96E-06	3.98E-06	0.00E+00	0.00E+00	3.27E-08	0.00E+00	7.72E-07	1.94E-04
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
Assignments of output flows at the end-of-life										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



The following results cover the Levelrock® Brand Acrylic Concrete Primer in a 5-gallon pail container.

Environmental LCA Results for Levelrock® Brand Acrylic Concrete Primer - 5-Gallon Pail - Gypsum, OH										
		Stage								
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global Warming	kg CO2 eq.	3.91E+00	7.83E-01	1.09E-01	0.00E+00	0.00E+00	9.31E-03	0.00E+00	1.76E-01	4.99E+00
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	6.68E-14	1.48E-15	1.58E-15	0.00E+00	0.00E+00	1.77E-17	1.00E+00	2.77E-15	1.00E+00
Acidification Potential	kg SO2 eq.	1.19E-02	8.00E-04	3.85E-04	0.00E+00	0.00E+00	2.82E-05	2.00E+00	3.86E-04	2.01E+00
Eutrophication Potential (EP)	kg N eq.	8.38E-04	1.91E-04	7.64E-05	0.00E+00	0.00E+00	2.89E-06	3.00E+00	1.85E-04	3.00E+00
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	1.87E-01	1.91E-02	4.51E-03	0.00E+00	0.00E+00	6.43E-04	4.00E+00	7.51E-03	4.22E+00
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	1.37E+01	1.41E+00	3.23E-01	0.00E+00	0.00E+00	1.74E-02	5.00E+00	9.41E-02	2.05E+01

Resource and Waste Flows for Levelrock® Brand Acrylic Concrete Primer - 5-Gallon Pail - Gypsum, OH										
	Units	Stage								
Use of Primary Resources		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	3.72E-03	6.53E-04	1.10E-04	0.00E+00	0.00E+00	5.11E-06	0.00E+00	1.09E-04	4.60E-03
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	1.08E-01	1.06E-02	2.37E-03	0.00E+00	0.00E+00	1.31E-04	0.00E+00	7.55E-04	1.21E-01
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Secondary material, secondary fuel and recovered energy</b>										
Secondary Material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	2.44E-05	3.30E-06	5.01E-07	0.00E+00	0.00E+00	1.84E-08	0.00E+00	1.86E-07	2.84E-05
<b>Additional inventory parameters for transparency</b>										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	1.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	4.86E-07	4.27E-07	2.18E-08	0.00E+00	0.00E+00	6.55E-09	0.00E+00	7.92E-08	1.02E-06
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Indicators describing waste</b>										
Hazardous waste disposed	kg	5.29E-12	6.80E-14	1.21E-13	0.00E+00	0.00E+00	5.46E-16	0.00E+00	4.05E-14	5.52E-12
Non-hazardous waste disposed	kg	9.79E-05	2.51E-06	1.44E-04	0.00E+00	0.00E+00	1.13E-08	0.00E+00	3.83E-03	4.07E-03
High-level radioactive waste	kg	2.08E-06	3.30E-08	4.44E-08	0.00E+00	0.00E+00	3.64E-10	0.00E+00	8.61E-09	2.16E-06
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Assignments of output flows at the end-of-life</b>										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



The following results cover the application of Levelrock® Brand Acrylic Concrete Primer applied at the recommended application rate (see section 1.4 above). These results are specifically for a 53-gallon drum container.

Environmental LCA Results for Levelrock® Brand Acrylic Concrete Primer										
1 Square Meter of Applied Coating at the Standard Application Rate - 53-Gallon Drum - Walworth, WI										
Impact Assessment Method: TRACI 2.1	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category		Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global Warming	kg CO2 eq.	3.50E-01	7.53E-02	-4.45E-02	0.00E+00	0.00E+00	8.35E-04	0.00E+00	1.58E-02	3.98E-01
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	5.64E-15	1.43E-16	-4.24E-17	0.00E+00	0.00E+00	1.58E-18	0.00E+00	2.48E-16	5.99E-15
Acidification Potential	kg SO2 eq.	8.53E-04	7.70E-05	-6.83E-05	0.00E+00	0.00E+00	2.53E-06	0.00E+00	3.47E-05	8.99E-04
Eutrophication Potential (EP)	kg N eq.	7.58E-05	1.84E-05	-6.66E-07	0.00E+00	0.00E+00	2.59E-07	0.00E+00	1.66E-06	9.54E-05
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	1.65E-02	1.84E-03	-7.51E-04	0.00E+00	0.00E+00	5.77E-05	0.00E+00	6.74E-04	1.83E-02
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	1.17E+00	1.36E-01	2.89E-02	0.00E+00	0.00E+00	1.56E-03	0.00E+00	8.44E-03	1.34E+00

Resource and Waste Flows for Levelrock® Brand Acrylic Concrete Primer										
1 Square Meter of Applied Coating at the Standard Application Rate - 53-Gallon Drum - Walworth, WI										
Use of Primary Resources	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	3.52E-01	6.28E-02	4.26E-02	0.00E+00	0.00E+00	4.58E-04	0.00E+00	9.79E-03	4.67E-01
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	9.13E+00	1.02E+00	-3.24E-01	0.00E+00	0.00E+00	1.18E-02	0.00E+00	6.77E-02	9.91E+00
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Secondary material, secondary fuel and recovered energy										
Secondary Material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	2.24E-03	3.18E-04	-1.92E-04	0.00E+00	0.00E+00	1.65E-06	0.00E+00	1.67E-05	2.38E-03
Additional inventory parameters for transparency										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	1.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	4.28E-05	4.11E-05	6.18E-07	0.00E+00	0.00E+00	5.87E-07	0.00E+00	7.10E-06	9.23E-05
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Indicators describing waste										
Hazardous waste disposed	kg	4.55E-10	6.55E-12	5.45E-12	0.00E+00	0.00E+00	4.90E-14	0.00E+00	3.63E-12	4.70E-10
Non-hazardous waste disposed	kg	8.63E-03	2.42E-04	1.47E-02	0.00E+00	0.00E+00	1.01E-06	0.00E+00	3.43E-01	3.67E-01
High-level radioactive waste	kg	1.33E-04	3.18E-06	2.89E-06	0.00E+00	0.00E+00	3.27E-08	0.00E+00	7.72E-07	1.40E-04
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
Assignments of output flows at the end-of-life										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



The following results cover the Levelrock® Brand Acrylic Concrete Primer in a 53-gallon drum container.

Environmental LCA Results for Levelrock® Brand Acrylic Concrete Primer - 53-Gallon Drum - Walworth, WI										
		Stage								
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global Warming	kg CO2 eq.	3.91E+00	8.40E-01	-4.97E-01	0.00E+00	0.00E+00	9.31E-03	0.00E+00	1.76E-01	4.44E+00
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	6.29E-14	1.59E-15	-4.74E-16	0.00E+00	0.00E+00	1.77E-17	0.00E+00	2.77E-15	6.68E-14
Acidification Potential	kg SO2 eq.	9.51E-03	8.58E-04	-7.62E-04	0.00E+00	0.00E+00	2.82E-05	0.00E+00	3.86E-04	1.00E-02
Eutrophication Potential (EP)	kg N eq.	8.45E-04	2.05E-04	-7.57E-06	0.00E+00	0.00E+00	2.89E-06	0.00E+00	1.85E-05	1.06E-03
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	1.84E-01	2.05E-02	-8.38E-03	0.00E+00	0.00E+00	6.43E-04	0.00E+00	7.51E-03	2.04E-01
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	1.30E+01	1.51E+00	3.22E-01	0.00E+00	0.00E+00	1.74E-02	0.00E+00	9.41E-02	1.49E+01

Resource and Waste Flows for Levelrock® Brand Acrylic Concrete Primer - 53-Gallon Drum - Walworth, WI										
	Units	Stage								
Use of Primary Resources		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	3.92E-03	7.01E-04	4.76E-04	0.00E+00	0.00E+00	5.11E-06	0.00E+00	1.09E-04	5.21E-03
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	1.02E-01	1.14E-02	-3.61E-03	0.00E+00	0.00E+00	1.31E-04	0.00E+00	7.55E-04	1.11E-01
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Secondary material, secondary fuel and recovered energy</b>										
Secondary Material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	2.50E-05	3.54E-06	-2.14E-06	0.00E+00	0.00E+00	1.84E-08	0.00E+00	1.86E-07	2.66E-05
<b>Additional inventory parameters for transparency</b>										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	1.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	4.78E-07	4.59E-07	6.88E-09	0.00E+00	0.00E+00	6.55E-09	0.00E+00	7.92E-08	1.03E-06
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Indicators describing waste</b>										
Hazardous waste disposed	kg	5.07E-12	7.30E-14	6.07E-14	0.00E+00	0.00E+00	5.46E-16	0.00E+00	4.05E-14	5.25E-12
Non-hazardous waste disposed	kg	9.62E-05	2.70E-06	1.64E-04	0.00E+00	0.00E+00	1.13E-08	0.00E+00	3.83E-03	4.09E-03
High-level radioactive waste	kg	1.49E-06	3.54E-08	3.23E-08	0.00E+00	0.00E+00	3.64E-10	0.00E+00	8.61E-09	1.56E-06
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Assignments of output flows at the end-of-life</b>										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



The following results cover the application of Levelrock® Brand Acrylic Concrete Primer applied at the recommended application rate (see section 1.4 above). These results are specifically for a 275-gallon tote container.

Environmental LCA Results for Levelrock® Brand Acrylic Concrete Primer										
1 Square Meter of Applied Coating at the Standard Application Rate - 275-Gallon Tote - Gypsum, OH										
Impact Assessment Method: TRACI 2.1	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category		Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global Warming	kg CO2 eq.	3.43E+02	7.27E+01	1.22E+01	0.00E+00	0.00E+00	2.67E-01	0.00E+00	5.06E+00	4.33E+02
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	5.64E-12	1.38E-13	1.67E-13	0.00E+00	0.00E+00	5.07E-16	0.00E+00	7.95E-14	6.03E-12
Acidification Potential	kg SO2 eq.	8.25E-01	7.43E-02	3.49E-02	0.00E+00	0.00E+00	8.09E-04	0.00E+00	1.11E-02	9.46E-01
Eutrophication Potential (EP)	kg N eq.	7.43E-02	1.78E-02	8.30E-03	0.00E+00	0.00E+00	8.30E-05	0.00E+00	5.31E-04	1.01E-01
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	1.61E+01	1.77E+00	4.65E-01	0.00E+00	0.00E+00	1.85E-02	0.00E+00	2.16E-01	1.86E+01
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	1.16E+03	1.31E+02	2.96E+01	0.00E+00	0.00E+00	4.99E-01	0.00E+00	2.70E+00	1.33E+03

Resource and Waste Flows for Levelrock® Brand Acrylic Concrete Primer										
1 Square Meter of Applied Coating at the Standard Application Rate - 275-Gallon Tote - Walworth, WI										
Use of Primary Resources	Units	Stage								
		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	3.50E+02	6.07E+01	1.05E+01	0.00E+00	0.00E+00	1.47E-01	0.00E+00	3.13E+00	4.24E+02
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	9.13E+03	9.88E+02	2.32E+02	0.00E+00	0.00E+00	3.77E+00	0.00E+00	2.17E+01	1.04E+04
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Secondary material, secondary fuel and recovered energy										
Secondary Material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	2.14E+00	3.07E-01	5.10E-02	0.00E+00	0.00E+00	5.27E-04	0.00E+00	5.34E-03	2.50E+00
Additional inventory parameters for transparency										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2-eq.	0.00E+00	1.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2-eq.	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2-eq.	4.27E-02	3.97E-02	2.49E-03	0.00E+00	0.00E+00	1.88E-04	0.00E+00	2.27E-03	8.74E-02
Emissions from combustion of waste from renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2-eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Indicators describing waste										
Hazardous waste disposed	kg	4.55E-07	6.32E-09	1.27E-08	0.00E+00	0.00E+00	1.57E-11	0.00E+00	1.16E-09	4.75E-07
Non-hazardous waste disposed	kg	8.63E+00	2.34E-01	2.69E+01	0.00E+00	0.00E+00	3.24E-04	0.00E+00	1.10E+02	1.46E+02
High-level radioactive waste	kg	1.32E-01	3.07E-03	3.05E-03	0.00E+00	0.00E+00	1.05E-05	0.00E+00	2.47E-04	1.39E-01
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
Assignments of output flows at the end-of-life										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00



ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

# Environmental Product Declaration

## USG Levelrock® Brand Acrylic Concrete Primer

Gypsum, OH and Walworth, WI



The following results cover the Levelrock® Brand Acrylic Concrete Primer in a 275-gallon tote container.

Environmental LCA Results for Levelrock® Brand Acrylic Concrete Primer - 275-Gallon Tote - Walworth, WI										
		Stage								
Impact Assessment Method: TRACI 2.1		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Environmental Impact Category	Units	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact	Impact
Global Warming	kg CO2 eq.	3.82E+00	8.11E-01	1.36E-01	0.00E+00	0.00E+00	9.31E-03	0.00E+00	1.76E-01	4.96E+00
Ozone Depletion Potential (ODP)	kg CFC 11 eq.	6.29E-14	1.54E-15	1.86E-15	0.00E+00	0.00E+00	1.77E-17	0.00E+00	2.77E-15	6.91E-14
Acidification Potential	kg SO2 eq.	9.19E-03	8.29E-04	3.89E-04	0.00E+00	0.00E+00	2.82E-05	0.00E+00	3.86E-04	1.08E-02
Eutrophication Potential (EP)	kg N eq.	8.29E-04	1.98E-04	9.24E-05	0.00E+00	0.00E+00	2.89E-06	0.00E+00	1.85E-05	1.14E-03
Photochemical Ozone Creation Potential (POCP)	kg O3 eq.	1.79E-01	1.98E-02	5.19E-03	0.00E+00	0.00E+00	6.43E-04	0.00E+00	7.51E-03	2.13E-01
Abiotic Depletion Potential (ADP) - fossil fuels	MJ surplus energy	1.30E+01	1.46E+00	3.30E-01	0.00E+00	0.00E+00	1.74E-02	0.00E+00	9.41E-02	1.49E+01

Resource and Waste Flows for Levelrock® Brand Acrylic Concrete Primer - 275-Gallon Tote - Walworth, WI										
	Units	Stage								
Use of Primary Resources		A1-A3	A4	A5	B1-B7	C1	C2	C3	C4	Total A1-C4
Renewable primary resources used as an energy carrier (RPRE)	MJ, NCV	3.90E-03	6.76E-04	1.17E-04	0.00E+00	0.00E+00	5.11E-06	0.00E+00	1.09E-04	4.80E-03
Renewable primary resources with energy content used as material (RPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable primary resources used as an energy carrier (NRPRE)	MJ, NCV	1.02E-01	1.10E-02	2.58E-03	0.00E+00	0.00E+00	1.31E-04	0.00E+00	7.55E-04	1.16E-01
Non-renewable primary resources with energy content used as material (NRPRM)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Secondary material, secondary fuel and recovered energy</b>										
Secondary Material (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Secondary Fuel (RSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-renewable Secondary Fuel (NRSF)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renewable Energy (RE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Consumption of Fresh Water	m3	2.38E-05	3.42E-06	5.68E-07	0.00E+00	0.00E+00	1.84E-08	0.00E+00	1.86E-07	2.80E-05
<b>Additional inventory parameters for transparency</b>										
Removals and emissions associated with biogenic carbon content of the bio-based product	kg CO2 eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emission from calcination and uptake from carbonation	kg CO2 eq.	0.00E+00	1.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Removals and emissions associated with biogenic carbon content of the bio-based packaging	kg CO2 eq.	0.00E+00	2.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from land use change	kg CO2 eq.	4.76E-07	4.43E-07	2.78E-08	0.00E+00	0.00E+00	6.55E-09	0.00E+00	7.92E-08	1.03E-06
Emissions from combustion of waste from renewable sources used in production processes	kg CO2 eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Emissions from combustion of waste from non-renewable sources used in production processes	kg CO2 eq.	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>Indicators describing waste</b>										
Hazardous waste disposed	kg	5.07E-12	7.05E-14	1.42E-13	0.00E+00	0.00E+00	5.46E-16	0.00E+00	4.05E-14	5.32E-12
Non-hazardous waste disposed	kg	9.61E-05	2.60E-06	3.00E-04	0.00E+00	0.00E+00	1.13E-08	0.00E+00	3.83E-03	4.23E-03
High-level radioactive waste	kg	1.47E-06	3.42E-08	3.40E-08	0.00E+00	0.00E+00	3.64E-10	0.00E+00	8.61E-09	1.55E-06
Intermediate and low-level waste	kg	NA	NA	NA	NA	NA	NA	NA	NA	NA
<b>Assignments of output flows at the end-of-life</b>										
Components for re-use (CRU)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling (MR)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery (MER)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Recovered energy exported (EE)	MJ, NCV	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00




ASTM INTERNATIONAL  
WWW.ASTM.ORG  
COPYRIGHT ©2014

#### 4. LCA Interpretation

The LCA results for the production of Levelrock® Brand Acrylic Concrete Primer were dominated by impacts associated with the polymer content of the product.

**Figure 3: Process Dominance Analysis for GWP for the Production of 1 Square Meter of USG Levelrock® Brand Acrylic Concrete Primer**

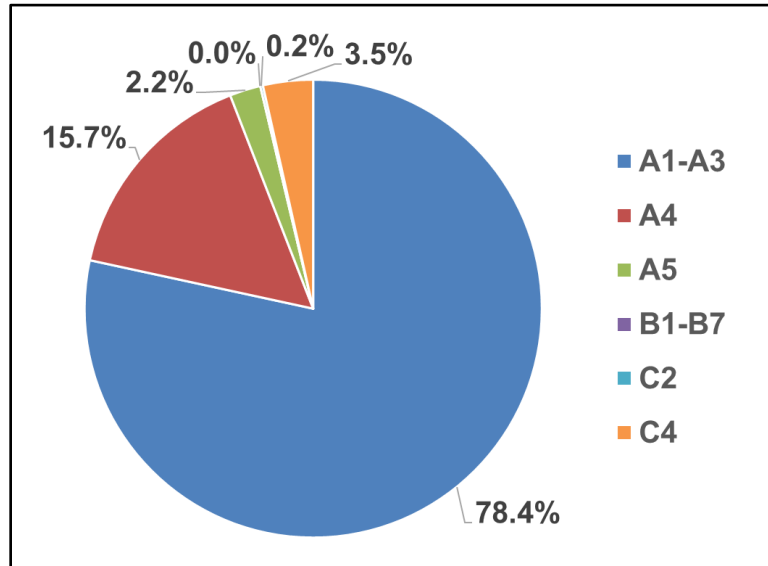

#### 5. References

##### LCA Report

A Cradle-to-Gate and Cradle-to-Grave Life Cycle Assessment of USG Sealers and Primers, 2/2/23. USG (Confidential)

##### Product PCR

NSF: PCR for Resinous Floor Coatings; valid through December 17, 2023

##### Sustainability Reporting Standards

ISO 14025:2006 - Environmental labels and declarations — Type III environmental declarations — Principles and procedures

ISO 21930:2017 - Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services