


USG TRUE® WOOD GRILLES

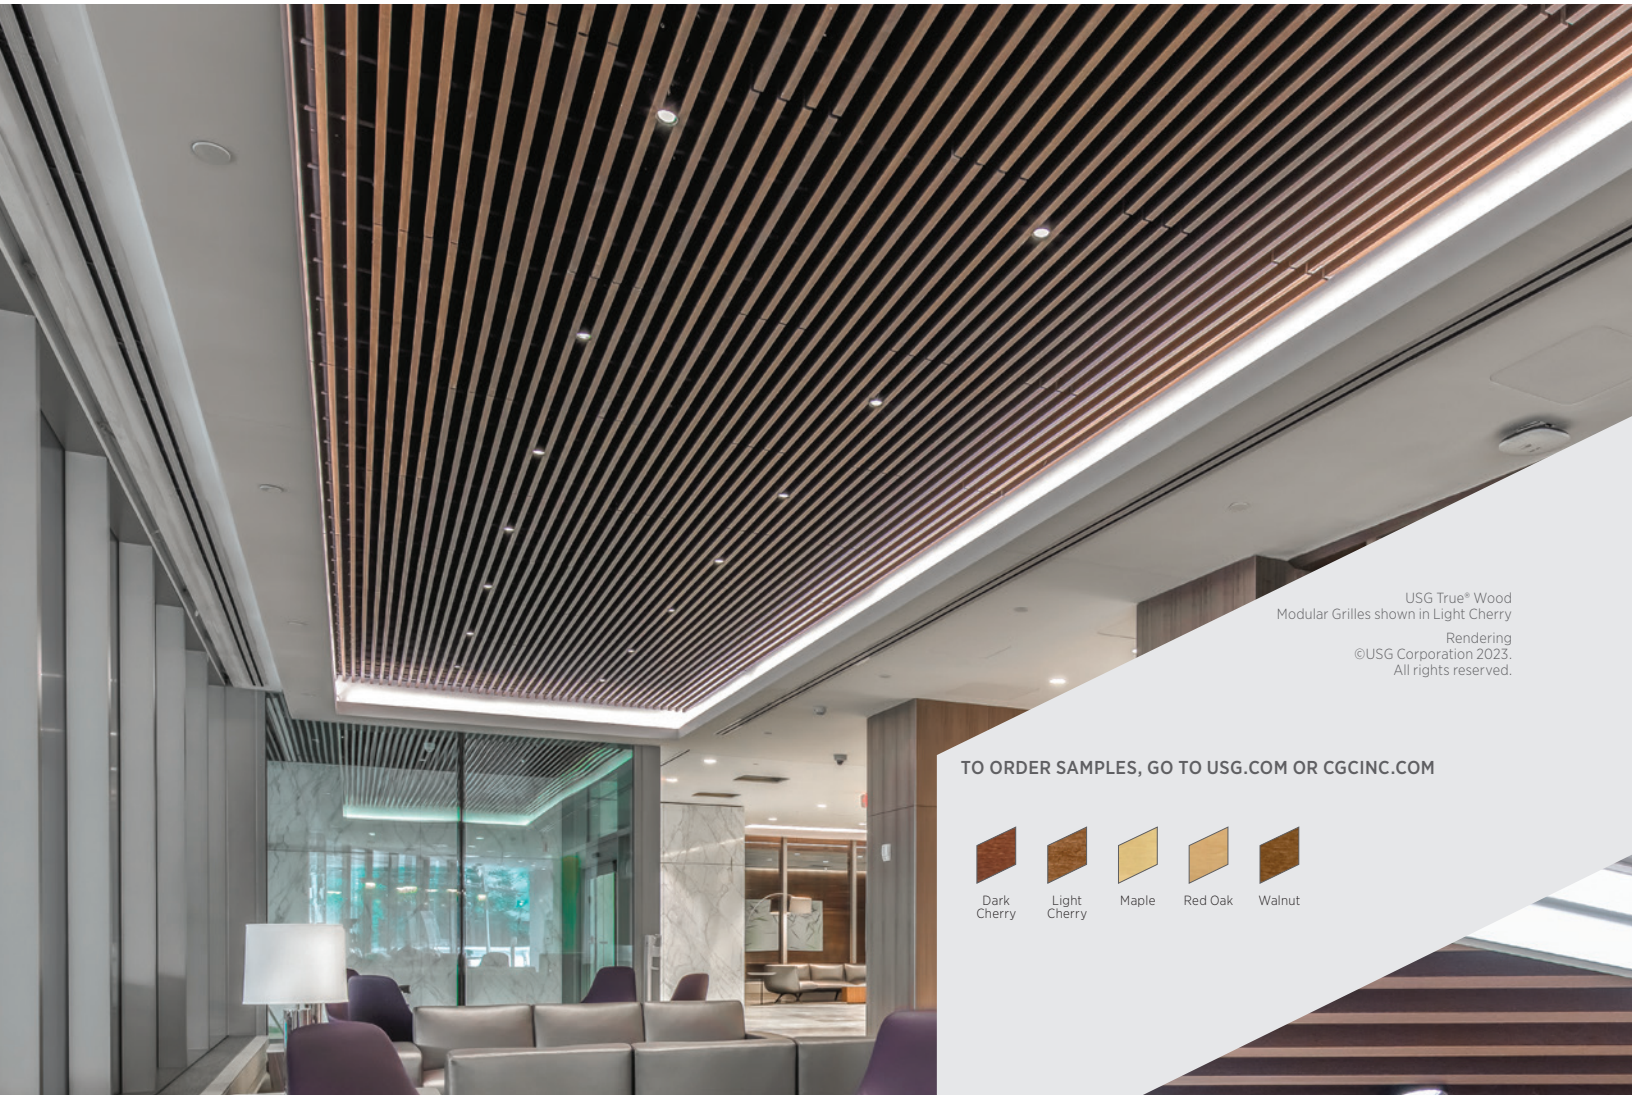

USG True® Wood
Modular Grilles shown in Light Cherry

Rendering
©USG Corporation 2023.
All rights reserved.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Dark
Cherry



Light
Cherry



Maple



Red Oak



Walnut

FEATURES AND BENEFITS

- USG True® Wood Grilles are FSC® Certified.
- Lay-in panel sizes of 2'x2', 2'x4' with various configurations.
- Modular panel sizes of 1'x8' with multiple configurations.
- Integrated felt backer available.
- Design support is available.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- New Construction or Renovation
- Downward Accessible (Modular)

USG True® Wood Horizontal Lay-In Grilles

USG TRUE® WOOD LAY-IN GRILLES

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)


FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL

usgdesignstudio.com
 cgcdesignstudio.com
 usg.ecomedes.com



USG True® Wood Lay-in Grilles offer universal installation and design flexibility as they can be installed in multiple orientations. Panels are designed to lay into USG Donn® Brand grid systems, offering both aesthetic appeal and easy access to mechanicals above. In the vertical orientation, often the slats can be used to shield the plenum.

VERTICAL SLAT ORIENTATION




Designed for 9/16" Intermediate or Heavy Duty Grid Systems

Type	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 2"	24"	24"	1/2"	1-1/2"	12	Vertical	1.24 lb./sq. ft.
Lay-in Grille	24" x 48" x 2"	24"	48"	1/2"	1-1/2"	12	Vertical	1.20 lb./sq. ft.

Designed for 15/16" Intermediate or Heavy Duty Grid Systems

Type	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 2"	24"	24"	1/2"	1-1/2"	12	Vertical	1.26 lb./sq. ft.
Lay-in Grille	24" x 48" x 2"	24"	48"	1/2"	1-1/2"	12	Vertical	1.23 lb./sq. ft.

HORIZONTAL SLAT ORIENTATION



Designed for 9/16" Intermediate or Heavy Duty Grid Systems

Type	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 1"	24"	24"	1-1/2"	1/2"	12	Horizontal	1.24 lb./sq. ft.
Lay-in Grille	24" x 48" x 1"	24"	48"	1-1/2"	1/2"	12	Horizontal	1.20 lb./sq. ft.

Designed for 15/16" Intermediate or Heavy Duty Grid Systems

Type	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 1"	24"	24"	1-1/2"	1/2"	10	Horizontal	1.10 lb./sq. ft.
Lay-in Grille	24" x 48" x 1"	24"	48"	1-1/2"	1/2"	10	Horizontal	1.10 lb./sq. ft.

GRID PROFILE OPTIONS

A USG DX®/DXL™ (Intermediate or Heavy Duty)	B USG Centricitee™ DXT™ (Intermediate or Heavy Duty)

ACOUSTICAL OPTIONS

Refer to Sales Brochure: IC716

USG TRUE® WOOD MODULAR GRILLES

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)


FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL

usgdesignstudio.com
 cgcdesignstudio.com
 usg.ecomedes.com



USG True® Wood Modular Grilles offer a simple installation and high aesthetic appeal. Panels can be easily installed on USG Donn® Brand grid systems with either a wood screw or square clip, providing easy access to the plenum. The vertical orientation of the slats shields the plenum from sight. Optional felt backer can be factory-installed.


BATTEN ONLY



Designed for 15/16" Heavy Duty Grid Systems

Type	Product Size (nominal)	Width	Length	Slat Height	Slat Width	Slats per Panel	Slat Spacing	Slat Orientation	Mounting	Weight
Modular Grille	12" x 96" x 1-7/8"	12"	96"	1-3/8"	5/8"	6	1-3/8"	Vertical	Batten	1.32lb./sq.ft.
Modular Grille	12" x 96" x 1-7/8"	12"	96"	1-3/8"	5/8"	8	7/8"	Vertical	Batten	1.70lb./sq.ft.
Modular Grille	12" x 96" x 2-3/4"	12"	96"	2-1/4"	5/8"	6	1-3/8"	Vertical	Batten	2.10lb./sq.ft.
Modular Grille	12" x 96" x 2-3/4"	12"	96"	2-1/4"	5/8"	8	7/8"	Vertical	Batten	2.63lb./sq.ft.

BATTEN AND DOWEL



Designed for 15/16" Heavy Duty Grid Systems

Type	Product Size (nominal)	Width	Length	Slat Height	Slat Width	Slats per Panel	Slat Spacing	Slat Orientation	Mounting	Weight
Modular Grille	12" x 96" x 3-3/4"	12"	96"	3-1/4"	5/8"	6	1-3/8"	Vertical	Batten & Dowel	2.86lb./sq.ft.
Modular Grille	12" x 96" x 2-3/4"	12"	96"	2-1/4"	1"	4	2"	Vertical	Batten & Dowel	2.20lb./sq.ft.
Modular Grille	12" x 96" x 3-3/4"	12"	96"	3-1/4"	1"	4	2"	Vertical	Batten & Dowel	3.10lb./sq.ft.
Modular Grille	12" x 96" x 4-3/4"	12"	96"	4-1/4"	1"	4	2"	Vertical	Batten & Dowel	3.90lb./sq.ft.
Modular Grille	12" x 96" x 3-3/4"	12"	96"	3-1/4"	1-1/4"	3	2-3/4"	Vertical	Batten & Dowel	2.86lb./sq.ft.
Modular Grille	12" x 96" x 4-3/4"	12"	96"	4-1/4"	1-1/4"	3	2-3/4"	Vertical	Batten & Dowel	3.66lb./sq.ft.
Modular Grille	12" x 96" x 5-3/4"	12"	96"	5-1/4"	1-1/4"	3	2-3/4"	Vertical	Batten & Dowel	4.47lb./sq.ft.

GRID PROFILE OPTIONS

A
 USG DX®/DXL™ (Heavy Duty)



ACOUSTICAL OPTIONS

Refer to Sales Brochure: IC716

USG TRUE® WOOD GRILLES

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com
 usg.ecomedes.com

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)



ACCESSORIES

Name	Description	Part Number	Unit of Measure	Qty
Batten Modular	Plywood Batten, stained black (11-7/8" Length, 1-1/4" Width)	749620	Carton	50
Batten (Middle) Lay-in	Plywood Batten, stained black (23-3/4" Length, 1-1/4" Width)	749621	Carton	50
Batten (End) Lay-in	Plywood Batten, stained black (23-3/4" Length, 3" Width)	749622	Carton	50
Perimeter Bracket	Secure Wood Trim to Ceiling Assembly	749623	Carton	50
180° Splice Plate	Splice Lengths of Wood Trim Together	749624	Carton	50
90° Splice Plate	Splice Corners of Wood Trim Together	749625	Carton	50
Lay-in Sample	Submittal Sample for Lay-in Grille	600648	Each	1
Modular Sample	Submittal Sample for Modular Grille	600649	Each	1
Felt Backer	Polyester Felt Backer, 1 mm thick, 12" width x 300 feet	749626	Roll	1
Felt Backer	Polyester Felt Backer, 1 mm thick, 24" width x 300 feet	749627	Roll	1
Dowel	1/2" Diameter x 11-7/8" Long; stained black	749628	Carton	50
Mounting Clip	Square Clip Used to Secure Battens to Grid	749629	Carton	50
PFB	Panel Fixing Bracket	746602	Carton	50

PHYSICAL DATA

Additional Documents and Resources

Data Sheet: IC715
 Sales Brochure: IC716
 Finishes Sheet: IC559
 Warranty: SC2102
 Installation Guide: IC274760

Online Tools

usgdesignstudio.com, cgcdesignstudio.com
 or usg.ecomedes.com

Notes

- Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1.2013.
- Refer to *CICSA Wood Ceilings Technical Guidelines* for best practices on installed wood ceilings.
- **Color Disclaimer:** Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.
- **Wood Disclaimer:** Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
- These representations should not be used to finalize color selection(s).
- Fire testing results available upon request.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC715/7-24

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DX, DXL, DXT, TRUE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

